DEC 1 2 1932

PENCIL POINTS

A JOURNAL for the DRAFTING ROOM

This Issue Includes Volume XVIII, Number 6 of

THE MONOGRAPH SERIES

New England Inns and Taverns, *by* Hubert G. Ripley

Functionalism and Architecture, 1 . . . . . *C. Howard Walker*

An Architect's Notes on Pen Drawing, 9 . . . . . *Sydney E. Castle*

The Geometry of Architectural Drafting, 22 . . *Ernest Irving Freese*

Modern Heating Methods . . . . . *Harold L. Alt*

Comparative Details, Group 3 . . . . . Radiator Enclosures

The Come-Back . . . . . *Ex-Draftsman*

Trends in the Building Industry . . . . . *Rolland J. Hamilton*

Draftsman's Data Sheets . . . . . *Don Graf*

Plates by *E. Donald Robb, Ernest F. Lewis,* and *Philip G. Knobloch*

DECEMBER, 1932 35 CENTS A COPY

© FRANK EHRENFORD

STEEL and its workers keep pace with the soaring visions of the new architecture. C B Sections, the most recent contribution to the efficiency of structural steel, have been particularly prominent in this upward climb, as evidenced by their use in the world's tallest structures.

US STEEL

CARNEGIE STEEL COMPANY · PITTSBURGH

Subsidiary of United States Steel Corporation

Pencil Points, published monthly by The Pencil Points Press, Inc., at 258 Atlantic St., Stamford, Conn. Publication office Stamford, Conn.

Christmas, 1932 Model

What does and should CHRISTMAS mean to members of the architectural profession this year? Certainly in many cases it means little or nothing on the boards, little or no work in immediate prospect, and nothing much in the cupboard. These conditions do not provide exactly an ideal situation from which to carry out an extensive program of giving. But this year as never before GIVING is required.

If it be true, as has often been said, that the poor give according to their means much more liberally than do the wealthy, the architects are certainly in a position this year to prove the truth of that statement for the Lord knows we are poor enough to suit the most exacting specifications in that respect.

What can we give this year to those architects and draftsmen who, through no fault of their own, have come absolutely to the end of their resources? If we have money, food or shelter now is the time to share it as never before. We cannot stand by and see our splendid profession disintegrate before our very eyes. We cannot see the thousands of able and splendid men who have given so much to the upbuilding of America drift away from Architecture for all time. The last ounce of our strength and the last atom of our resources should be dedicated to the proposition of seeing this thing through.

The Christmas Season perhaps more than any other time of the year is the moment for us to make our supreme effort to hold fast to that which we have, in a larger sense, until the economic readjustments required to bring about more prosperous conditions for us all shall have been completed. Those of us who have reached a point where we can give nothing of a material character can perhaps provide that which is most needed at this time. I refer to things of the spirit. When a man is down and out sometimes a friend means more than a turkey dinner; although, of course, both are desirable. Sometimes a little friendly counsel and advice will help a man who, because of his personal problems, is utterly discouraged and does not know what to do next, to a calm analysis of the situation out of which a solution can be found. The architect in his customary work is called upon every day to solve difficult problems. He must be resourceful and ingenious, and in many cases these qualities can be brought to bear successfully in helping some brother in the profession over a tough spot in the road which he alone cannot negotiate.

Let each group, wherever in the country they may be located, go into a huddle with the determination to face the facts as they exist and to work out something even though it may be in the nature of a temporary expedient which will keep every member of that group from want, and at the same time build up the spirit of that group to carry on until the sky is clear. Signs are not wanting that things are on the mend, although it may not yet truthfully be said that enough blue sky is visible from which to fashion the much talked about pair of "Dutchman's Breeches." The effects of the depression are still with us and they will be for a while but if we have already hit and passed the low point, which is probably true, the expectation of even a gradual recovery should sustain us in our determination to carry on until the surge of recovery picks us up as individuals and lands us in a better spot than we are now occupying.

It is our hope and belief that CHRISTMAS 1932 will go down in history as the last one of the great depression.

Pencil Points, published monthly by The Pencil Points Press, Inc., at 256 Atlantic St., Stamford, Conn. Publication office Stamford, Conn.

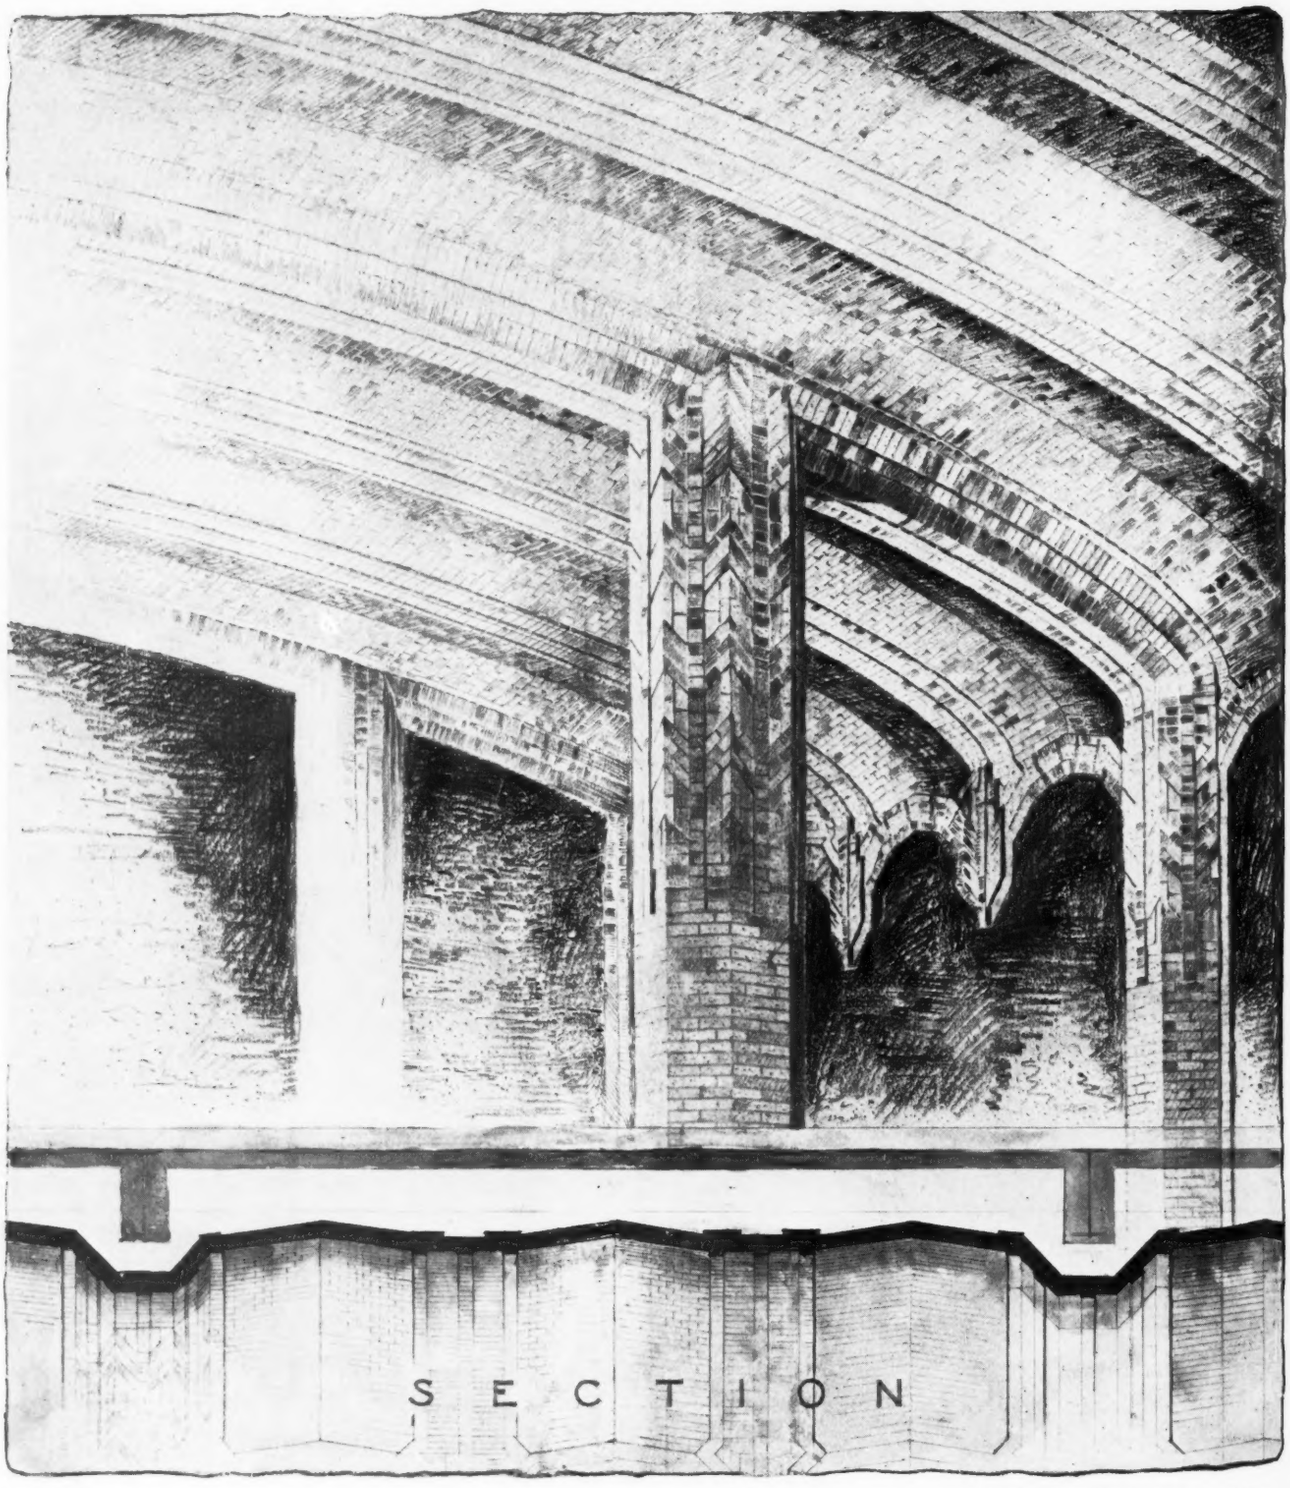

WESTERN UNION BUILDING
New York, N. Y.

VOORHEES, GMELIN & WALKER
Architects

ALL MASONRY CEILING VAULTS

(TIMBREL ARCH CONSTRUCTION)

WITH

SOFFIT TILE TO MATCH WALLS

CONSTRUCTED BY

R. GUASTAVINO COMPANY

40 COURT STREET, BOSTON, MASS. 500 FIFTH AVENUE, NEW YORK, N. Y.

R. GUASTAVINO CO. OF CANADA, LTD., Architects Building, Montreal, P. Q.

PENCIL POINTS

An Illustrated Monthly JOURNAL for the DRAFTING ROOM *Edited by* RUSSELL F. WHITEHEAD KENNETH REID & E. L. CLEAVER *Published by* THE PENCIL POINTS PRESS, INC. Ralph Reinhold, *President*, P. H. Hubbard, *Vice-President*, William V. Montgomery, *Secretary*

This Month and Next

C. Howard Walker, it will be noted, will continue next month the article begun in this issue. The general subject of design philosophy seems to him so fundamental that he will have more to say than could be compressed into a single article. He is getting right down to the basic things which underlie architecture and his analysis will bear careful study. Watch for the second part.

The second set of 24 data sheets will be complete in this issue and shortly thereafter will be available separately, printed on bond paper all punched and cut to size. We have had so many letters from readers commenting enthusiastically on this feature that we are glad to announce that the series will continue, four sheets a month, through the next twelvemonth at least. Don Graf has been hard at work and promises some extra-valuable sheets for the forthcoming issues.

The comparative detail feature continues to draw the plaudits of our subscribers. This month we present a set of Radiator Enclosures and next month the subject will be "Overhanging Second Stories." The architects who have cooperated by unselfishly lending their details for comparative presentation deserve the thanks of the thousands of readers who are studying them each month. The invitation for criticism and suggestions, issued last month, still stands and we would be glad to hear from anyone who has any comments to make.

Contents

For December, 1932

Frontispiece—Oil Painting by E. Donald Robb	786
Functionalism and Architecture, 1 *By C. Howard Walker*	787
An Architect's Notes on Pen Drawing, 9 *By Sydney E. Castle*	791
The Geometry of Architectural Drafting, 22 *By Ernest Irving Freese*	793
An Architect Who Went After Business and Got It *By R. W. Sexton*	802
New England Inns and Taverns *By Hubert G. Ripley*	803
Modern Heating Methods *By Harold L. Alt*	819
Comparative Details—Radiator Enclosures	829
The Come-back *By an Ex-Draftsman*	836
Trends in the Building Industry *By Rolland J. Hamilton*	837
Here & There & This & That	849
The Specification Desk	851
Index to Volume XIII	854

A short article this month by R. W. Sexton tells of the experience of one architect who found a way to beat the depression. We print it in the hope that it may provide a suggestion to many practitioners located in cities but handy to smaller centers where work may be had if one goes after it right. The development of the idea of the architect as "repair diagnostician," put forth by "Gargoyle" in PENCIL POINTS last January, seems to be proceeding quietly in various places. It is certainly resulting in bringing real architectural *service* more closely home to the public.

The color plate this month is a beauty, we think, and seems appropriate for the Christmas season. Next month's will be timely too—a night rendering of a residence by Meade and Hamilton of Cleveland, done as a snow scene by Edward Dixon McDonald. The unusual combination will be of interest to renderers.

For next month's issue we have decided to see if we can surprise you. We can't go into details about it but we just want to drop a hint to the effect that it's going to be "different." We hope you will notice the "difference" and like it.

We can't put this issue to press without expressing the sincere wish that the Christmas season may bring you peace of mind and contentment. Our hopes are high that 1933 will hold better days for us all.

PENCIL POINTS—*Yearly subscription, payable in advance, $3.00 to the U. S. A., U. S. Possessions, Cuba, and Mexico. Foreign subscriptions in the Postal Union, $1.00 additional for postage; Canadian subscriptions, 50 cents additional. Remittances by International or American Express Money Order or by Draft on a bank in the U. S. Payable in United States Funds. Subscribers are requested to state profession or occupation. TO SUBSCRIBERS: Instructions for change of address shou'd reach us before the twentieth of the month to assure delivery of the forthcoming issue. Please give both old and new addresses. TO CONTRIBUTORS: We are always glad to receive manuscripts, drawings, etc. We will use due care with material in our hands, but cannot be responsible for damages.*

Copyright, 1932, by The Pencil Points Press, Inc. Trade Mark Registered. All rights reserved.

EDITORIAL AND BUSINESS OFFICES, 419 FOURTH AVENUE, NEW YORK.

PENCIL POINTS is indexed regularly in *The Art Index*

AMERICAN STEEL & WIRE COMPANY

WIRE FABRIC

THE STEEL BACKBONE OF CONCRETE

Greater Permanence and Safety

American Steel & Wire Company Wire Fabric Reinforcement is finding its way into more and more important structural developments every day. For example, in the erection of the New York Life Insurance Building this Wire Fabric was used throughout to reinforce the concrete floors, guaranteeing longer service and greater safety. Leading Architects and Engineers now specify American Steel & Wire Company Wire Fabric when preparing their plans. Hundreds of highly satisfactory installations prove the wisdom of their specifications.

1831 MORE THAN 100 YEARS of PROGRESS in WIRE MAKING 1932

AMERICAN STEEL & WIRE COMPANY

208 South LaSalle Street, Chicago — SUBSIDIARY OF UNITED STATES STEEL CORPORATION — And All Principal Cities

Pacific Coast Distributors. Columbia Steel Company, Russ Building, San Francisco — *Export Distributors:* United States Steel Products Company, New York

Pencil Points Series of Color Plates

This painting was done on a sheet of oil sketch board of a fine texture with the usual oil colors. After completion it was heavily varnished, since such treatment on a painting of an interior always seems to help the effect. The subject is an ambulatory in an imaginary French cathedral with the stone work, or at least a part of it, decorated in color in the manner which the mediæval builders usually intended but only occasionally carried out. The patterns on the painted columns were taken from the columns in the ambulatory of the Church of St. Germain des Prés in Paris. The size of the original painting was 15¼" x 22¼".

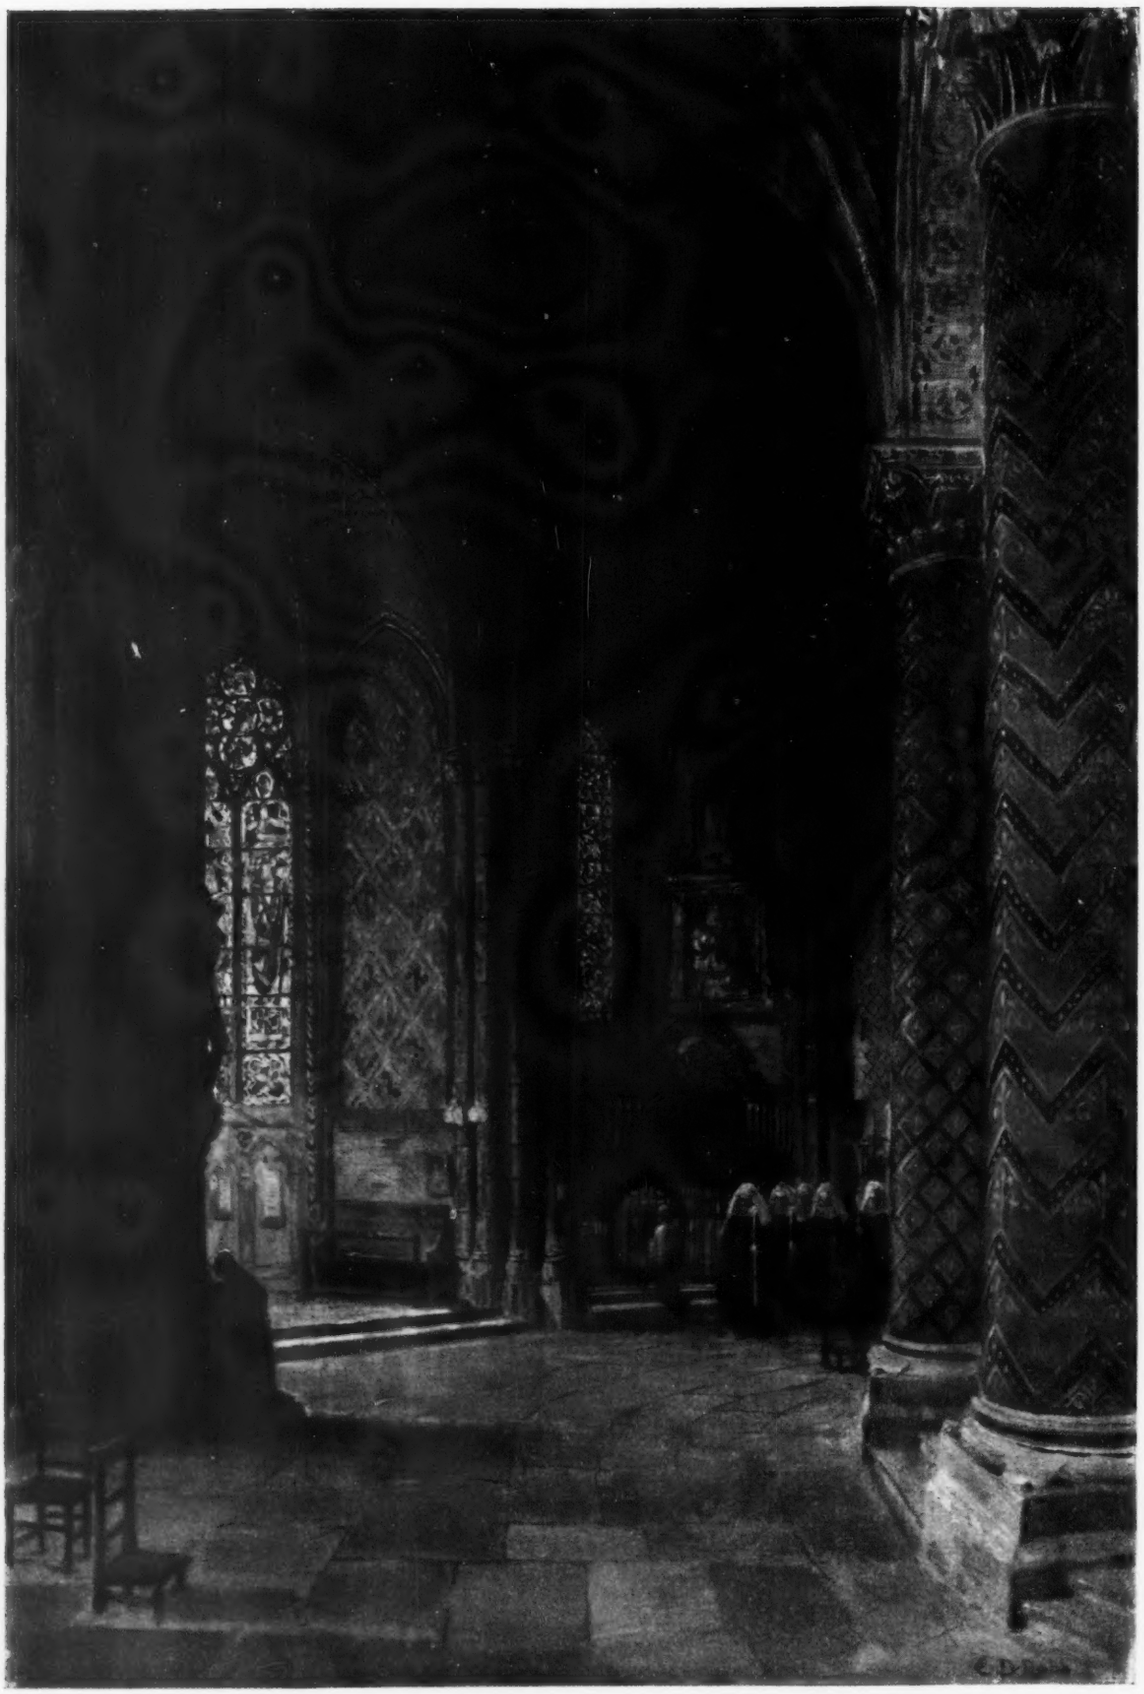

AMBULATORY OF A FRENCH CATHEDRAL THAT NEVER WAS BUILT

FROM AN OIL PAINTING BY E. DONALD ROBB

PENCIL POINTS
(December, 1932)

PENCIL POINTS
Volume XIII December, 1932 Number 12

Functionalism and Architecture, 1

By C. Howard Walker, F. A. I. A.

Editor's Note:—*This is the tenth of a series of articles in which leading architects are discussing the philosophy of design, considered in the light of present-day practice. Preceding articles in the series have been by William Adams Delano, George Howe, Albert Kahn, Alfred Fellheimer, Irving K. Pond, William F. Lamb, Dwight James Baum, Louis La Beaume, and Ralph Adams Cram. Mr. Walker will continue his discussion next month.*

"*Man has always been recognized as the imitative animal 'par excellence.'*

"*Each of us is in fact what he is almost exclusively by virtue of his imitativeness; the sense of self grows by the sense of pattern. The entire accumulated wealth of mankind—languages, arts, institutions, and sciences—is passed from one generation to another by social heredity, each generation simply imitating the last. Invention and imitation are the two legs on which the human race has walked. Imitation shades into emulation, the impulse to imitate another in order not to appear inferior, and is the nerve of human society. Emulation shades into ambition closely connected with pugnacity and pride and ownership, and constructiveness and destructiveness, two names for the same manual activity leading to objective and experimental methods.*"—"*Talks to Teachers*"—WILLIAM JAMES.

The mentality of mankind influences personal expression and creates two distinct preferences in men's action. Those of the larger body desire and are satisfied with what they consider irrefutable facts (*sic*), capable of proof. Hence is evolved logic and the exact sciences, in which a statement can be tested by reversing the process which produced it.

Most men are content with autocratic authority, provided it is of benefit and, without doubt, the physical welfare of the world has resulted from formulated truths capable of proof and of development, and men's lives are protected by the accumulated deductions of their ancestors.

The other class are both kings and slaves of imagination, inspirational, too often without physical knowledge, and subject, well or ill, to the winds of fancy. They are lone wolves and prefer to be—in fact, cannot be otherwise—and while they lead the pack and inspire its action, their success in a physical universe is dependent upon the other type of men.

It matters little what names are given to the two types—Materialists, Idealists, Practical Men and Dreamers, Traditionalists, Functionalists, Logicians and Philosophers, Craftsmen and Artists—in one or the other of these types men enlist. Each needs the other, the second crowns and glorifies the first, but for life alone is unnecessary to it. As it happens, the most distinguished men of either class acknowledge and possess the best attainments of the other class, but these are naturally comparatively few in number. The others are apt to be either hewers of wood or drawers of water—very useful—or else vaporizers of little value. Of the professions, architecture based upon physical demands is merely engineering and is not born or named architecture unless deified by the qualities of the Dreamer. It is Engineering plus Art. It is Art transcending but the scion of Engineering. From this premise it can be logical in its process and inspirational in its achievements, and be so considered in any diagnosis of its character.

Architecture relates to habitations of which the original purposes are entirely utilitarian, to shelter and protect from climate, from attack, and to secure isolation. The habitations are excavated or constructed, first single cells—later grouped.

The most elemental of all cells is a sphere, which is unstable like the egg of Columbus and therefore only a portion of it is used on a horizontal plane. Caves, tents, igloos, and cells with a central focus partake of this character, which is soon abandoned for rectangular cells as more adaptable to utilitarian uses. Of polygonal cells those of the hectahedron fit together as in the bees' hives, without interstices of waste space, but again are seldom used in architecture, since slight waste space is less to be considered than the simple angles of a rectangular shape.

The law of gravitation forces this common-sense conclusion, and planes are either vertical or horizontal, with inertia or with balance, slanting surfaces being avoided excepting when utility demands them to transfer unstable materials such as sand, water, and snow.

Up to this point utility only is considered, and the work is elementarily functional. Different materials from adjacent areas create no great variations in type. The single cell in its two lateral dimensions was established; its centre was a focus, its plan a square or circle. Almost at once a new element appears, that of a shift of this focus to one side, and a consequent

straight line of approach to it from the opposite side —an axis is established, on which is the focus and the access to it. At once this axis becomes the dominant factor of plan. If the focal point of attention is at the centre—as in a number of monuments, cells surrounding an altar, a statue, a tomb—the simple circular plan ensues or, as in baptistries, that of a regular polygon, but an oval creates a longitudinal axis, which increases in proportion to the length of the cell compared to its width, and eventually becomes the spinal cord of the organic plan, a fact too often ignored in merely utilitarian plans but which is soon forced by the demands of adequate function. All circulation from the circular cell were upon radial lines, incoming or outgoing. It could be a ganglion on an axis, but the capacity for plan development of a circular cell from any cause was slight, and largely confined to niches, semicircular or rectangular, around the cell, as in the underground rooms of Roman catacombs, such tombs as that of Cecelia Metella, the circular temples of Vesta, the circular Calidaria of Baths and the domed circular buildings of Hadrian, all of which have no lateral axis, but develop a vertical axis.

Therefore, the circular cell in plan, functionally simple, is of little importance compared to that of the rectangular cell, which forms the component factors of the great majority of plans. Niches, apses, hemicycles, etc., are subordinate accessories.

The rectangular cell, starting from a square, is elongated and a longitudinal axis is established, carried through the rectangle, or terminated at one end, at which end is usually the principal feature of functional purpose. It is at first a single unit, in temple, tomb, and megaron. Its relation of length to width is created by the habit of groups of people to face directly the object opposite its entrance, and by the available length of material to span its width. Hence, the increasing growth of a long narrow cell, with its longitudinal axis, which forms the elemental cell of functional plan. Architectural plan is an organism, resembling in many respects an animal organism, and is not a mere collection of unrelated units. Its axes, however, are not analogous to structure but are to arterial circulation. Architecture is an organism with an arterial system surrounded by a shell. It therefore is a crustacean. Its arteries and lines of circulation create its axes; its shell surrounding the cells which its arteries feed creates its visual expression of areas and masses. Both are entirely elementally functional.

The Arterial or Circulatory Factors of Plan

The main artery is the main axis of each organic plan, from which secondary axes proceed, usually at right angles to the main axes. If important secondary axes parallel the main axes the result is that of an associated group, each with its own circulation. Minor axes can be established for factors of the integral independent of it, but the most harmonious results are obtained by axes paralleling each other, i.e., planning axes horizontally and vertically (see Durand and Letarouilly). The flow of circulation does not follow radial lines, excepting from foci or as occasioned by unusual considerations of land contours or light exposure, but the distribution of circulation is at right angles to the main axes. The occasion for such custom is economy of space in grouping cells, avoidance of impractical corners (exterior and interior), a unanimous system of distribution, and, in the processes of using structural materials, an economy of labor. Long halls and corridors are veins; openings, doors, etc., are valves across a line of circulation and therefore on its axes and opposite each other, forming vistas excepting at times in continuous suites in which a partial segregation or individuality of cells is desired. The splitting at the end of main axes into a series of radial axes causes a focal termination of the main axes (Theatres, Odeons, Apses, etc.).

Adequate Circulation

In attempts to take every advantage of land value for pecuniary return, plans are often starved and at times atrophied by scrimping areas of circulation. This is frequently a false economy, depreciating the apparent quality of a building. The people who used a building came from the outside, gathered outside, if in numbers, and then entered. In proportion to their numbers they were to be accommodated by the circulation within the building and distributed if necessary. Outside was merely the supply, analogous to the heart feeding the arteries. The supply was small and intermittent, or constant, or large and at definite intervals. The circulation was accommodated to the demands made upon it. Advanced courts centered on the main axes provided for unusual gatherings. (See Egyptian temple courts—plazas before public buildings.) They became, when within the building and under its roof, the atrium, the pronaos, the vestibule, the *Salle des Pas Perdus*, the advanced and welcoming factor of the circulation, reservoirs from which the circulation proceeds. Too often in poor plans for large circulation they are ignored.

Buildings used by few people, coming and going at will, naturally require less important circulation and ingress and egress than those used by congregations of people at definite periods. It is to these latter that adequate factors are to be carefully considered. At first these are simple cells as in temples and tombs, their ingress proportioned to the number of the congregation of people. As the people enter they converge and, having reached their destination, lessen their pace and are slower in action; as they depart, they diverge upon leaving the building and their speed is uncontrolled, their destinations various. The circulation is like the flow of a liquid, checked upon entering, freed upon exit from which it can burst. Entrance, therefore, if possible, should broaden from within.

Symmetry and Balance on Either Side of Main Axis

All the higher animal organisms have symmetry, i.e., identical proportions upon either side of the central line of their structure whether it be a solid or an arterial flow. When this is absent the result is abnormal, and so-called deformities or monstrosities occur, handicapping the organism. The cause for the symmetry is obvious. It is the law of gravitation which

influences all objects upon the earth, and creates the stability of balance which is best obtained by absolute symmetry. The apparent exceptions are those of fixed organism proceeding from a focussed base as in the Vegetable Kingdom and in Algae, etc., which grow from a focus, but even these are influenced by the drag of gravitation as they expand. Actual or indicated stability and a consequent inspired confidence is one of the most desirable elements in artistic expression, overcoming as it does, excess of minor factors. Especially is this the case in architecture, both in plan and mass.

The Third Dimension

When from the plan the building arises, it is expressed at once in geometric solids, excepting when one façade only is visible, which is expressed by an area of two dimensions only. In either case stability should be evident; first, by verticality of walls, surfaces and supports, such as piers, columns, etc., which are merely perforated walls. Architectural design becomes either so-called trabeated architecture (*trave*, a beam) of verticals and beams, creating the Greek order, or a system of vertical walls, perforated or unperforated.

Regular geometric solids until superposed (i.e., of one mass only) demand little arrangement of proportion compared to those superimposed. Such are sarcophagi, pyramids, obelisks, etc. They are seldom criticized excepting in relation to their environment, are accepted as simple concrete facts. Cones and domes fall under the same category. But with superimposed solids, great care in relative shapes and geometrical proportions is demanded.

It is obvious that stability is evidenced by placing larger solids beneath smaller ones, as in terraced pyramids (Meidum), towers, minars and minarets, flèches, Renaissance lanterns and spires. The possibilities of skilled arrangement creating architecture has been especially evident in Mohammedan work and in the churches of Sir Christopher Wren, which, while acknowledging elemental functionalism, have developed it into an art of great beauty. Gothic Cathedrals and Italian Brolette have done the same.

Until functionalism has grown from mere adolescence to a state of high artistic expression, it has not earned a definition as architecture, nor is it to be considered as other than embryonic.

In proportioning areas and masses to each other, excessive subtlety is unnecessary and confusing. Some order, some module, declares arrangement and proportion—and therefore thought and consideration, lack of which induces chaos. Any order is better than no order, but it should be evidently present, and therefore simple. For this reason the simple rectangular subdivisions of horizontal and vertical lines of trabeated architecture are the controlling network of all design, and diagonals and curves are symmetrically arranged in relation to it. Subtleties have been used, variously deciphered, and the results have enamoured many, but like most intricate and involved processes tend towards vagueness. Painting and Sculpture have greater latitude in regard to the acknowledged stability of arrangement than does architecture, but they use it to advantage. Philosophies have dabbled with proportions and the attempted solution of the Pythagorean proportions has intrigued many, with few results. One fact seems definite, i.e., that proportions measured by the regular numbers 2, 4, 6, 8 are crudely evident compared to those of 3, 5, 7, etc., which are more subtle. Beyond this, in Architecture, little advantage is gained.

If identical polyhedrons are superposed, they diminish upward in relative masses, and, as their sides and surfaces are exactly in proportion to those of the ascending masses, the result is that of a stepped terraced pyramid. Such are the Ziggurats of Assyria. But great variety can be obtained by changing the heights in proportion to the bases, in which case systems of alternates and of ratios of solids are adopted. Haphazard piling of one mass above another is devoid of order, method and composition.

The element of arrangement and composition of geometric solids has at once transcended mere functionalism, and while maintaining functional purposes, bends them to its will. Architecture as an Art is born at this point. It satisfies the actual needs of function, but assumes control of its expression. It is a characteristic of all meticulous demands of specialists in all exact sciences that they are assumed to be as irrevocable as the laws of the Medes and Persians, despite the fact that Nature's laws are mutable. Results of the same character are obtained in many ways. The arrogant dicta of functionalism creates a muscle-bound condition without resiliency. Art, to be alive, requires resiliency, freedom, and law, stopping short of license.

It is at this point also that the Arts are characterized as vague, erratic and illogical, all of which attributes an indication of Free Will. With control, that will be Common Sense—for, like the Fire of which it is a blood brother, it is an unruly master but the best of servants.

Superimposed Solids of Various Shapes

Regular geometrical figures of equal areas are conspicuous in proportion to their simplicity of shape, as follows; the circle, isosceles triangle, square, pentagon, hexagon, octagon. Figures of a greater number of sides begin to take the character of a circle, but solids decrease in apparent relative scale as the number of their sides increase, therefore the sequence of their superposition is on the order above provided they have equal plan area, but as in plans axes are best when parallel, so in solids the planes of their sides are best when at least half of them are parallel to those of adjacent solids. At once triangular prisms, pentagons, and hexagons are found to be untractable and seldom used, especially as their incongruities are exaggerated by light and shade. All superposed solids, as their aggregation builds vertically, have vertical axes, and tend to announce it by having greater heights than diameters, excepting the solid at the base. Taking these characteristics into account, superposed solids carefully arranged have created a series of the finest of architectural structures which have reached their finest apogee in the so-called skyscrapers. *(To be continued.)*

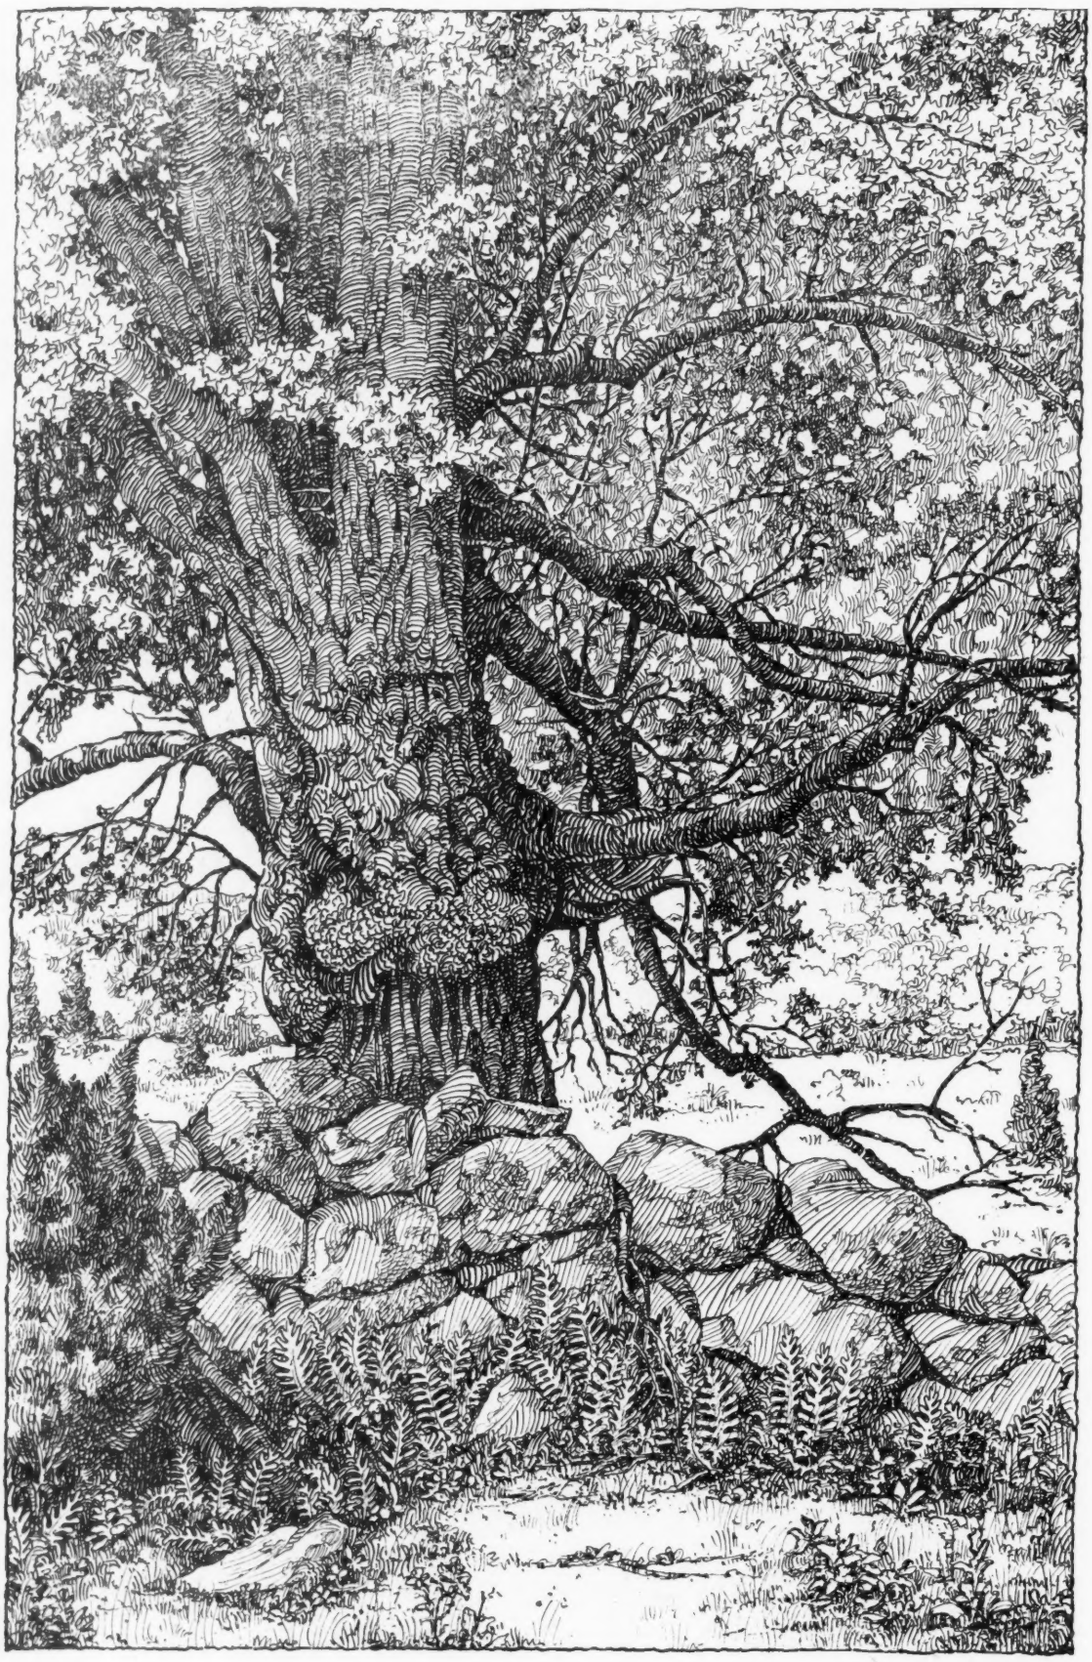

A TREE STUDY IN PEN-AND-INK BY ERNEST F. LEWIS
Size of original, 8½" x 13"

An Architect's Notes on Pen Drawing, 9

By Sydney E. Castle, F. R. I. B. A.

The placid, naïve beauties to be found in Cotswold stone, while lending themselves so amiably to the softer tones of color or pencil, lend themselves, if no less agreeably, perhaps more problematically to the more articulate work of the penman.

In this peculiar respect the surfaces are nearly always bald—in reality, solid and enduring, on paper apt to be transparent.

One hardly theorizes when one quotes actual experience. My first serious attempt to impress an intelligent view of Cotswold architecture on a sketching card comes back as I write. It was a low, rambling building, gabled here and there and peeping with kindly roof slopes. But there were plenty of wall surfaces—restful and self-explanatory enough in themselves, but another proposition altogether on paper. My sketch proceeded, and the more it proceeded the more my building seemed constructed of glass. Very well for me to indulge in silent oaths to avoid stone joints I couldn't see, or go frisky with fancy reflections that didn't exist. But as soon as my pen became so restricted it became poor value for my eyesight.

It was problem. If I dared a background of dark trees—most of us who draw in the open are bits of Ananiases with foliage on occasion—what did they do? They either made my stone surfaces more transparent than ever, or danced impertinently and quite untruthfully in front of the building.

Hence, my early scorn for the technical difficulties of my subject matter quickly subsided. Fresh as I was then from the intricate complications of the Cloisters at Gloucester, which for a penman to overcome in any sort of intelligent manner would leave him, on the face of it, almost patronizing when he faced cottagy stone, I suffered mild shock.

There was a white road in front, I remember, and a part of my building dropped clean on to it without even a straggle of ragged grass. My eyes travelled up and down from paper to object almost furtively. Then wandered. Something beyond made the two distinct values of wall and road, something my wits connected but had not yet dissected—something that explained and made obvious the pale horizontal from the pale perpendicular. I found a dramatic definition in a dwarf wall and a clump of yew further along. At the other extreme I found a confused shadow with one spot of light divided between laying on the ground and travelling up the wall. In a flash I saw. The explanatory secret was *an unseen line*.

I put it into effect—deliberately let my wall and my road confuse as they liked, but very carefully studied every point of the two more clearly defined extremes. And lo I found, this done, that my wall and road took care of themselves!

My eye travelled eagerly. And thenceforth wherever I stared I discovered much the same thing —the simple secret of unseen line.

Thus, as one who has spent a goodish chunk of his life wandering in the Cotswolds with pencil and pen, I strongly recommend the penman wayfarer in England not to neglect his Campdens and Broadways. He will find pen fun in bushel-loads. There will be nothing to scare his modesty in draftsmanship. Architecturally, I doubt if any of these little townships has anything particular to teach over its neighbor. But in each will be charming unexpectedness in unchanged theme—a measure of delight for the

humblest pen-wielder in which monotony is the very last guest he will be called upon to entertain.

Then let him turn in a radically opposed direction.

When he has taken a goodly fill of jotting down his prim, proper and uniformly severe Jacobean in West Country stone, let him take his pen where men could find no stone but found oak trees in plenty as a happy compensation.

Let him blink his eyes over wall surfaces as busy and talkative as those he has just left behind have been reticent and reserved.

Problem rushes up again—but rather opposite problem.

I may be wrong about half-timber work in pen drawing. In the ordinary course of things one would say, "Ah, here is the very essence of what is sometimes called 'black-and-white.' Dramatic contrasts everywhere. Big overhangings and eaves casting their handsome assisting shadows, every wall a forest of lines, and wherever I look a regular El Dorado for a niggly nib."

Well, on the face of it, that looks indisputable. But I am far less certain of it when it comes to test. I have just paused in order to recall drawings of half-timber work in pen and ink that have really impressed me from a realistic point of view; and I feel a little memory-impoverished. I will freely admit that I have been fairly constantly charmed by dexterous technique, but I have rarely found my lovable acquaintance with several half-timber friends as they in themselves fill my eye much supported by pen and ink representations of them.

AT ROBERTSBRIDGE, SUSSEX, ENGLAND

FROM A PEN-AND-INK DRAWING BY SYDNEY E. CASTLE

Reproduced one-fifth larger than original drawing

The Geometry of Architectural Drafting

22—Some Short Cuts with the Triangles

By Ernest Irving Freese

Editor's Note:—*This article, which is copyrighted, 1932, by the author, continues the series begun in August, 1929. Earlier installments have appeared in August, September, October, November, December, 1929; January, February, March, April, May, July, September, November, 1930; January, February, April, July, August, November, 1931; and May and August, 1932.*

As has been thoroughly demonstrated in foregoing Parts of this work, the greater portion of *drafting-room* geometry inheres in the sliding instruments alone—in the lines generated by the T-square and the three triangles operating in their normal working positions on the board. Obviously, if *all* extraneous construction lines can be eliminated from the graphical solution of a geometric problem, then that particular problem becomes solved with the utmost economy of means and in the shortest possible time. Many instances of such expeditious instrumental manipulation have heretofore been recorded. Others are contained in this Part; the particular ones here shown having to do with *circle* construction, that is, with the direct location of the required center, or centers, without recourse to a more general, and therefore more involved, geometric construction. Wherefore, all layouts here shown, and all special dimensioning data here given, are "short-cuts" and, like all short-cutting methods, are applicable only to the cases illustrated. However, and again like all short-cutting methods, they are ready for instant and everyday use. *Reach for your triangles.*

Figure 205:

Diagram "1" is a geometric demonstration of the usefulness of the "hexagonal diagonal," or 60-degree line, as a direct locus of centers. If a circle be drawn with each vertex of an equilateral triangle as center, and with one-half a side of this triangle as radius, then the three resultant circles will come tangent to one another at the points where they cross the sides of

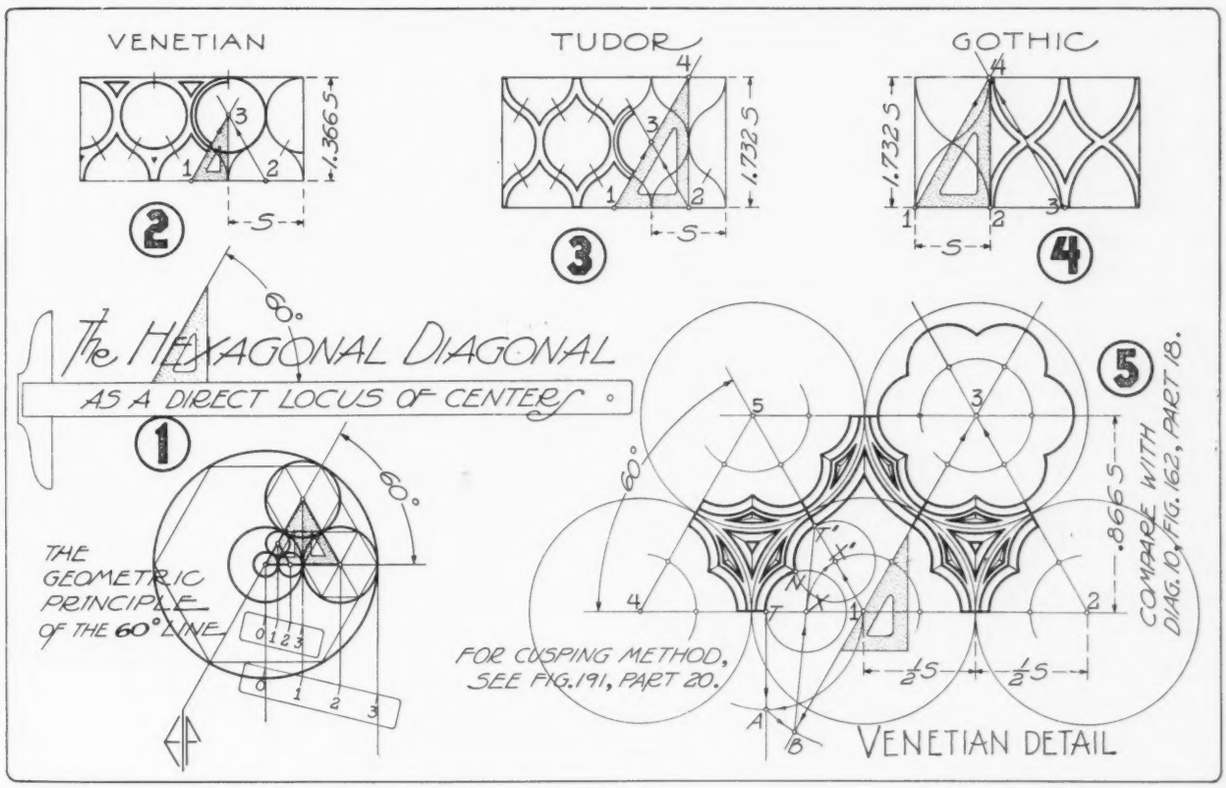

FIGURE 205

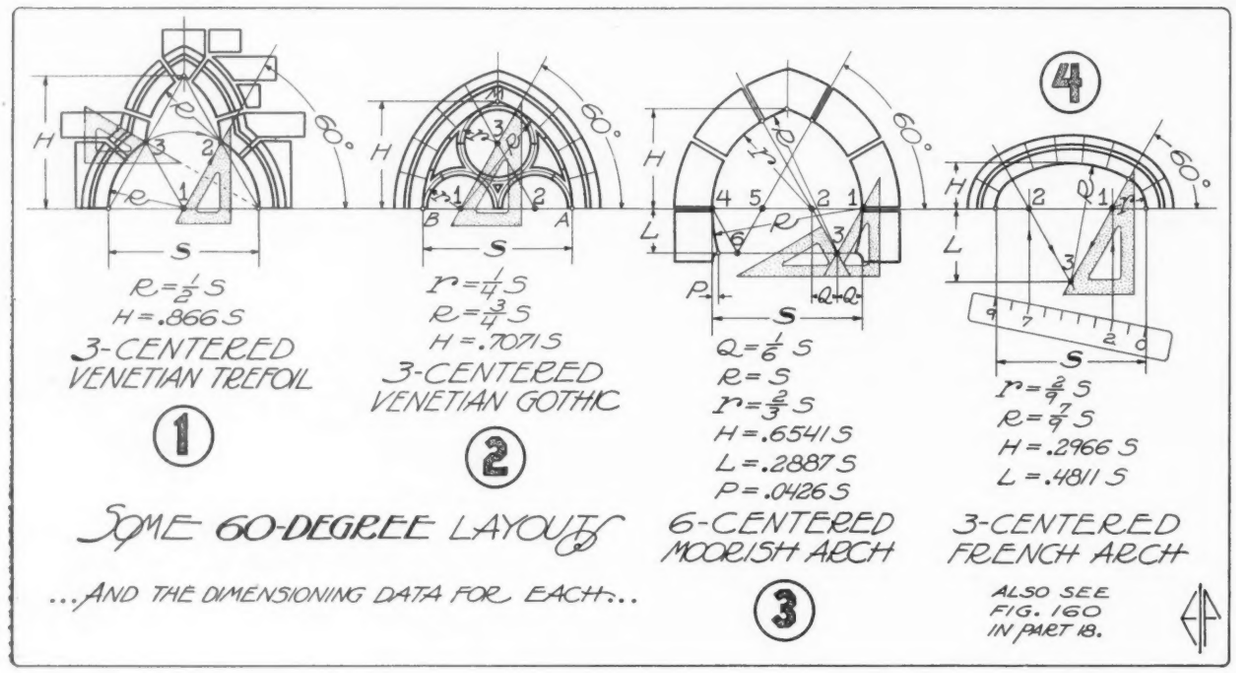

FIGURE 206

the triangle. A regular hexagon is a compound of six equilateral triangles. Six tangent circles may therefore be drawn either *outside* a given circle and tangent thereto, or *inside* a given circle and tangent thereto, by a direct utilization of the above facts. In the one case, the required radius would be the same as the radius of the given circle. In the other case, the required radius would be exactly one third the given radius. Any given circle, then, say of a rose window, will just contain seven equal circles, six of them around the circumference of the seventh, as Diagram "1" indicates. The other Diagrams of this Figure put the 60-degree line to work. The only extraneous line here employed is the projector BT' in the enlarged detail at Diagram "5." This line fixes the radius XT of each arc of the orthogonally cusped foliations; and X, in turn, is then revolved to X', etc., with the compass centered at point *1*, etc.

The altitude of an equilateral triangle, or half the short diameter of a regular hexagon, is equal to half the length of one side times the square root of 3. In other words, the longer rectangular leg of your 30-degree triangle is equal to the length of the shorter leg times the square root of 3. From this fact comes the special dimensioning data given in connection with the layout Diagrams of Figure 205. The square root of 3 is 1.7320508, but the last four decimals are of no earthly use. Call it 1.732. Then $.866S$ is the simple mathematical formula for the altitude of an equilateral triangle, where S is the length of one side.

Figure 206:

More ready-to-use 60-degree layouts employing no extraneous lines at all. Every triad of centers forms an equilateral triangle. This drawing is replete with all information required, both as regards the graphical layouts and the subsequent figured dimensioning of same.

Note that the system of jointing worked out at Diagram "1" makes the Venetian trefoil arch structurally sound: the upper *actual* arch is carried by the lower cantilevered portions of arch *shape*.

Figure 207:

Here, the diagonal of a square—the 45-degree line—contributes a few typical instances of its use as a locus of centers.

At Diagram "1," the various suggested designs for circle-filled panels—sidelights, say—are all fabricated from centers located at the four corners of a square and at the crossing of its diagonals.

At Diagram "2," two slides of the 45-degree triangle locate X. The same manipulation will also locate the centers for cross-sectioning the quadrant arcs of Roman Doric column fluting, there being no fillets between said flutes. The other centers, X', etc., are then better found with the compass, as shown. Any slight inequality in the spacing of the points *a*, *b*, *c*, etc., will then not affect the radii of the connecting scallops, since the center for each scallop must, by the method shown, fall *equidistant* from each pair of spaced-off points.

In the next four Diagrams, the 45-degree ogee becomes a cyma of equal rectangular dimensions, the crossed diagonal locating the inflection-point *d* and, in turn, the line of centers XX'. These Diagrams are also utilized to clarify the distinction between the two kinds of cymas shown. Cyma means wave. *Any* ogee whose profile forms any portion of a continuous *horizontal* wave is a cyma *recta;* but, if the profile forms any portion of a continuous *vertical* wave, the cyma is a *reversa*. In other words, the distinction is

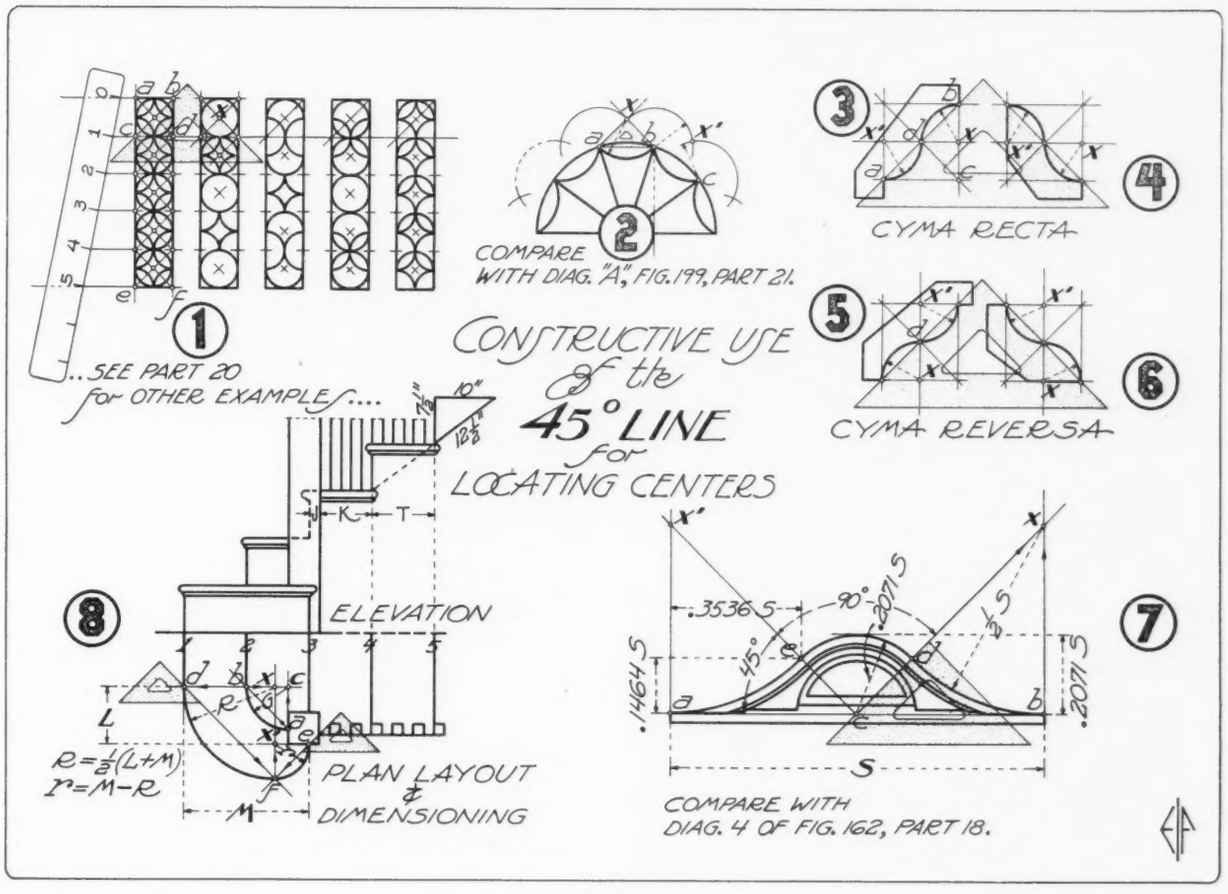

FIGURE 207

just the *reversa* of what one would naturally conclude.

At Diagram "7," a pleasing eyebrow appears. You can duplicate this trick as quick as a wink. And, by simple multiplication of the indicated values, you can discover its dimensions almost as quickly. But if this particular eyebrow doesn't "take your eye," then take your pick from any one of the half dozen *commensurables* set out at Figure 162 in Part 18 heretofore.

The plan layout of Diagram "8" is as follows: Slide your 45-degree triangle to point *a*, and mark *b* on the second riser line; draw a T-square line through *b*, both ways, crossing the first riser at *d*, and crossing a vertical from point *a* at one required center *C*; then, from *e* and *d*, project 45-degree lines to cross at *f*; whence, a vertical from *f* locates the centers *X* and

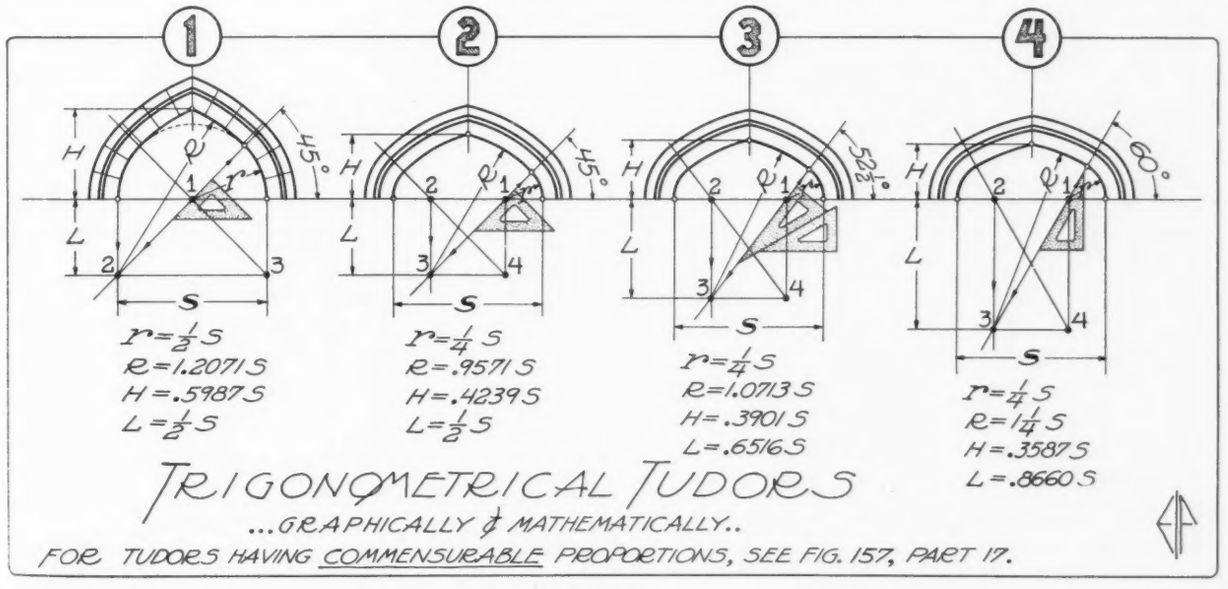

FIGURE 208

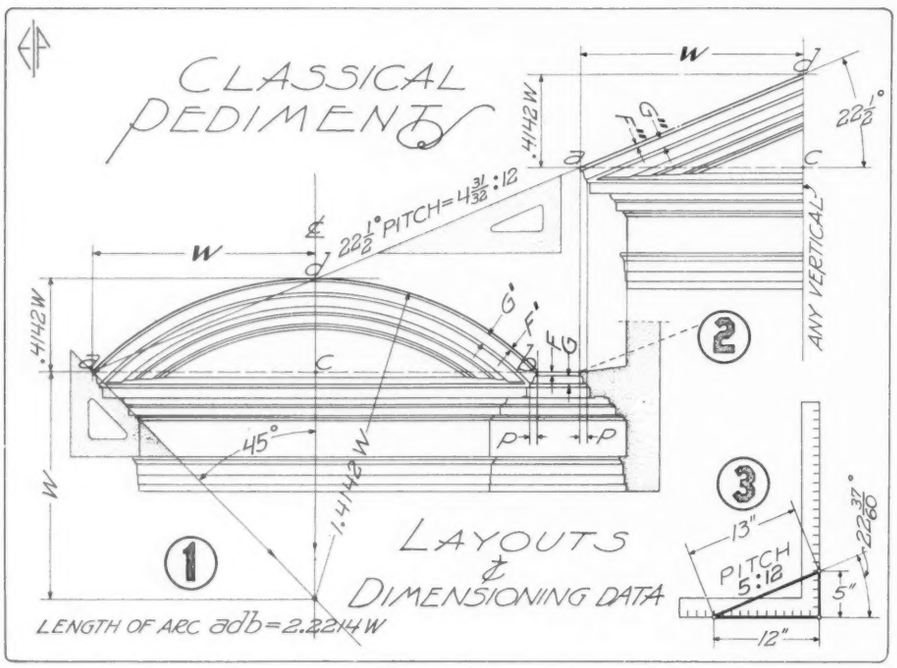

FIGURE 209

X′ for the compound curve of the "bull-nosed" first riser. The simple formulas for determining the dimensions are also given. The radius *G* is obviously known.

The elevation at Diagram "8" is shown to bring out two points that are worthy of such emphasis. First, the distance *J* should equal the width of a baluster instead of half the width of the newel. The balusters on the thus curtailed portion *K*, of the tread, will then "space out" the same as those on the full tread *T*. Second, in a stairway having 7½″ risers and 10″ treads—a common and good proportion, by the way—the "pitch block" forms a right triangle whose hypotenuse is exactly 12½″, as noted on the Diagram. You see, the 7½-10-12½ triangle is the same old 3-4-5 Egyptian rope-stretching rule for laying out a right angle—as you can easily discover by multiplying each factor of the latter triad by 2½. Wherefore, in a stairway of this pitch—or in a roof either, for that matter—any *horizontal* distance multiplied by 5/4ths, and any *vertical* distance multiplied by 5/3rds, will exactly determine the corresponding *raking* distance. Incidentally, a *roof* of this pitch would be 9 to 12, the rafter being 15. These facts are worth remembering.

Figure 208:

You can lay out any one of these "trig" Tudors just as fast as you can manipulate a triangle and swing a compass. And, if you can multiply two numbers together, you can determine all necessary figured dimensions quicker than the engineer in the next room could get out his trigonometrical tables preparatory to *commencing* to figure them. All of these shapes agree with what some one once said was the criterion of a Tudor; namely, that the angle subtended by each haunch arc should be neither less than 45 degrees nor greater than 60 degrees. Well, there you are: both of them, and one in between—45 degrees, 52½ degrees, 60 degrees. Moreover, the *three*-centered one, at Diagram "1," is almost a "dead ringer" for one in the aisle of Westminster Abbey: now I *know* you'll like it.

Figure 209:

"According to Vignola" the peak of a classical pediment is found as follows: Upon the extreme pediment-span as a diameter, describe an inverted semicircle; from the nethermost point of this semicircle, as a center, describe a segmental arc passing through the extreme points of the semicircle's diameter; whence, the crown point of the segmental arc becomes the Vignolan peak of the pediment. In other words, the pitch of a classical pediment is—merely 22½ degrees. Moreover, the center of a *curved* pediment, of the same qualified classification, lies on a 45-degree line projected from either point of the extreme span. The pictured triangles of Figure 209 tell the story.

Subtract 1 from the square root of 2. The result is the trigonometrical tangent of 22½ degrees. Hence, the classical roof pitch is practically 4-31/32nds inches to the foot. But a pitch of 5 inches to the foot would raise the peak of a 50-foot pediment scarcely 25/32nds of an *inch*, and would

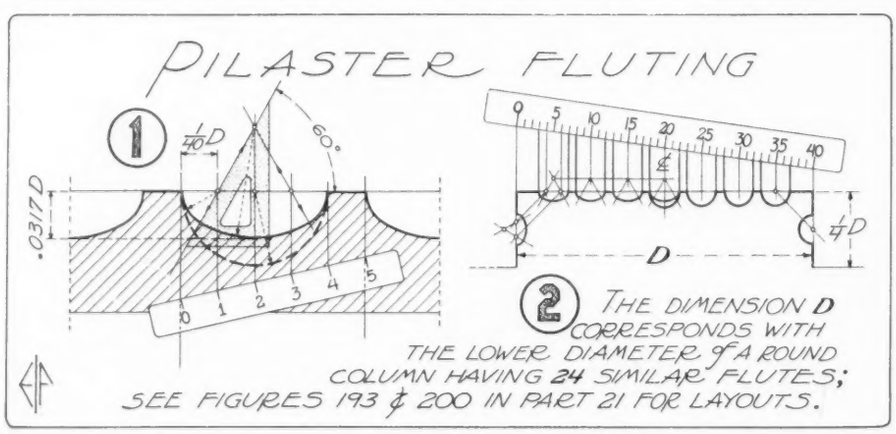
PILASTER FLUTING
1/10 D
60°
.0317 D
0 1 2 3 4 5
0 5 10 15 20 25 30 35 40
D
1/4 D
THE DIMENSION D CORRESPONDS WITH THE LOWER DIAMETER OF A ROUND COLUMN HAVING 24 SIMILAR FLUTES;
SEE FIGURES 193 & 200 IN PART 21 FOR LAYOUTS.

FIGURE 210

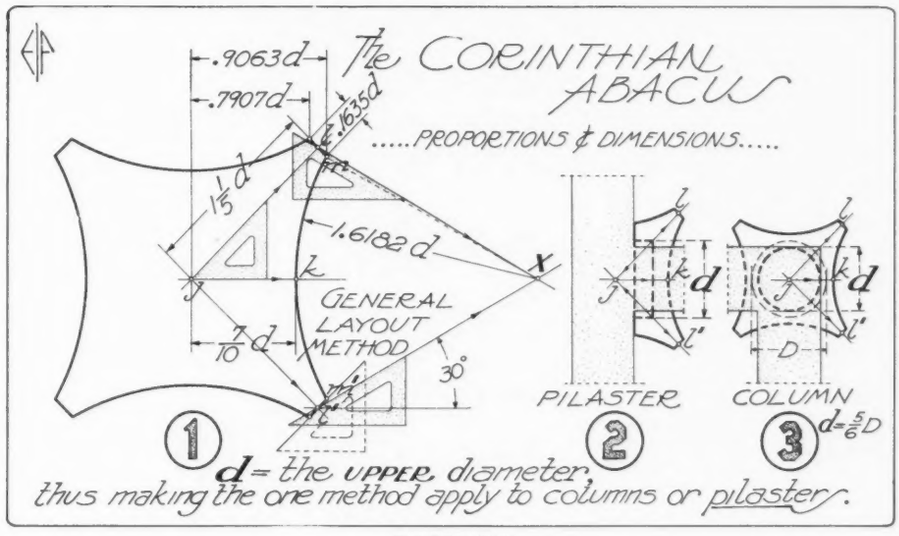

FIGURE 211

make the rake commensurable with the rise and run. Diagram "3" shows this latter fact in connection with the *un*classical steel square. But I've given you the dimensioning data, at Diagrams "1" and "2," for the 22½-degree pitch. If you use the more sensible 5 to 12 pitch, you don't need any data: the rise is merely 5/12ths of the run; and any distance along the straight rake is 13/12ths of the corresponding run; and the radius of a *curved* pediment is exactly 169/120ths of the *half* span *W*. Maybe, after all, the original perpetrators of classical architecture *intended* their pediments to be 5 to 12 pitch, but their perpetuators made a slight mistake. Who knows?

Diagrams "1" and "2," of Figure 209, are also utilized to make plain a peculiarity of all such gables, regardless of their pitch and regardless of whether the rake is curved or straight: namely, in all cases (except a possible imaginary one) the normal widths *F'* and *G'*, or *F''* and *G''*, of the raking crown moulding, will not be the same as the corresponding widths *F* and *G* of a membering level moulding, so long as the projection *P* remains the same, and so long as the face of the topmost fillet is maintained vertical. Note that this discrepancy in width between the level crown moulding and the raking one is particularly evident in the curved pediment at Diagram "1." This awkward situation, which requires special detailing, cannot be avoided if the horizontally-returned crown moulding, from which the raking one springs, must miter correctly with a similar horizontal one at the wall line. However, in the case of an isolated gable—the pediment of a Colonial doorway, say—the rake moulding and the horizontally-returned one may be identical in shape and size, since they may thus be correctly mitered, one to another, by making the miter-cut *perpendicular to the plane of the roof* rather than vertical. Suggestive instances of this latter method may be seen at Diagrams "H" and "J" of Figure 163 in Part 18; it being applicable either to a pediment with a *straight* rake or to one with *any type of curved rake.*

Figure 210:

In a round column containing 24 equally-spaced flutes, the straight line by which the eye gauges the spacing is the chord of a 15-degree arc. The length of such a chord is practically 13/100ths of the column diameter. The nearest manageable equivalent of this fraction is ⅛th. Hence, for a flat pilaster, the correspondingly-proportionate spacing of flutes or fillets, center to center, becomes ⅛th of a diameter. Again, in classical proportions, the width of a fillet, between consecutive flutes, is 1/40th of a diameter, which leaves the width of a pilaster flute exactly four times

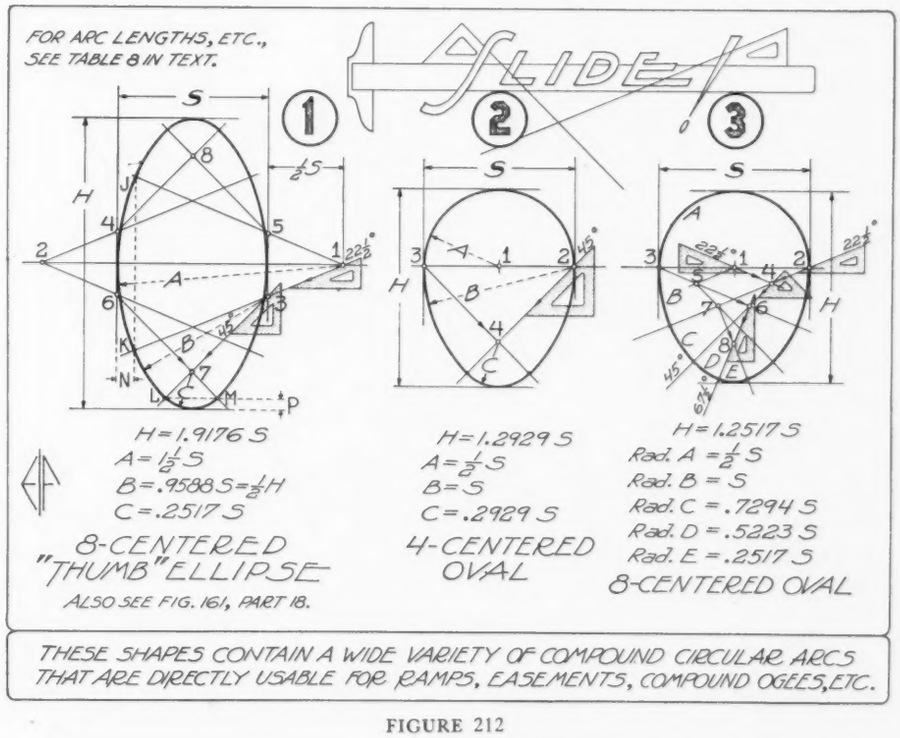
FOR ARC LENGTHS, ETC., SEE TABLE 8 IN TEXT.
SLIDE
H = 1.9176 S
A = 1½ S
B = .9588 S = ½ H
C = .2517 S
8-CENTERED "THUMB" ELLIPSE
ALSO SEE FIG. 161, PART 18.
H = 1.2929 S
A = ½ S
B = S
C = .2929 S
4-CENTERED OVAL
H = 1.2517 S
Rad. A = ½ S
Rad. B = S
Rad. C = .7294 S
Rad. D = .5223 S
Rad. E = .2517 S
8-CENTERED OVAL
THESE SHAPES CONTAIN A WIDE VARIETY OF COMPOUND CIRCULAR ARCS THAT ARE DIRECTLY USABLE FOR RAMPS, EASEMENTS, COMPOUND OGEES, ETC.

FIGURE 212

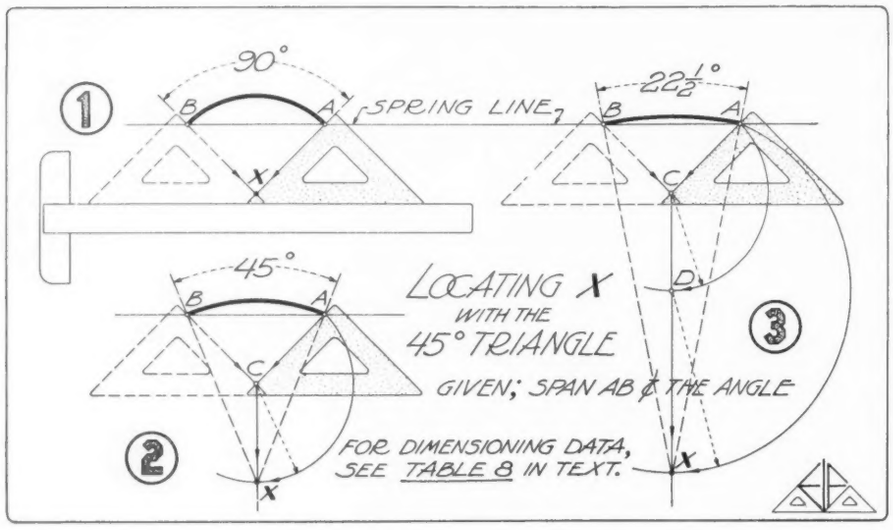

FIGURE 213

the width of a fillet; and allows of seven flutes to a pilaster face, thus placing one on the center line; and leaves the width of three fillets as a frame for the fluting; and fixes the minimum one-fluted projection of the pilaster at just one fourth of its face width.

The flutes and fillets can be quickly and accurately spaced as shown at Diagram "2."

Diagram "1" indicates the direct use of the 60-degree line in the full-size detailing of pilaster flutes having a three-centered cross section. The dimension giving the depth of this type of fluting is also there recorded, since it may help in predetermining the stock thickness of material required for a built-up wooden pilaster: practically, this depth is 1/32nd of the diameter *D*, which latter is the width of the pilaster as shown and noted in the Figure. Obviously, for the full semicircular fluting (indicated in a dotted line at Diagram "1"), the depth of a flute is equal to half its width, or to twice the width of a fillet, or to 1/20th of *D*.

Figure 211:

Another classical puzzle has here been unpuzzled—the plan layout and dimensioning of the Corinthian abacus both for columns *and* pilasters. In monumental work, such members are often of huge size, hence require to be accurately dimensioned. Note, especially, that the factor *d*, here used in both the graphical layout and in the values for figured dimensioning, is the diameter of the column or pilaster *at the line of the capital*, thus eliminating the confusing factor of *entasis*, and making the one method apply to round columns, square columns, and rectangular pilasters. Just remember: the dimension *d* is the *upper* diameter in each particular case; said upper diameter having already been determined either "according to Vignola" or according to a more complicated system productive of module-splitting differences in the comparative results. Then proceed to lay out the plan like this: Lay off *jk* equal to 7/10ths of *d*; then *jl* and *jl'*, on 45-degree lines, each equal to 6/5ths of *d*; then locate the required center *X* by 30-degree projectors from *l* and *l'*; then, with the compass centered at *X*, open it to *k* and swing the required arc *mkm'* limited by the 45-degree lines *lm* and *l'm'*. You will note that this arc is *not* a 60-degree arc, since its limiting radial is *Xm*, not *Xl*. Now, if necessary, you can readily figure its *dimensions*. This dimensioning data also has another use: namely, for determining "clearances" in a tight pinch. Anyhow—it's all there. Use it.

Figure 212:

Diagram "1" shows the layout of an eight-centered approximate ellipse having a ratio of short diameter, *S*, to long diameter, *H*, of practically 12 to 23. The four-centered oval at Diagram "2" has a ratio of *S* to *H* of about 24 to 31, while the diametral ratio of

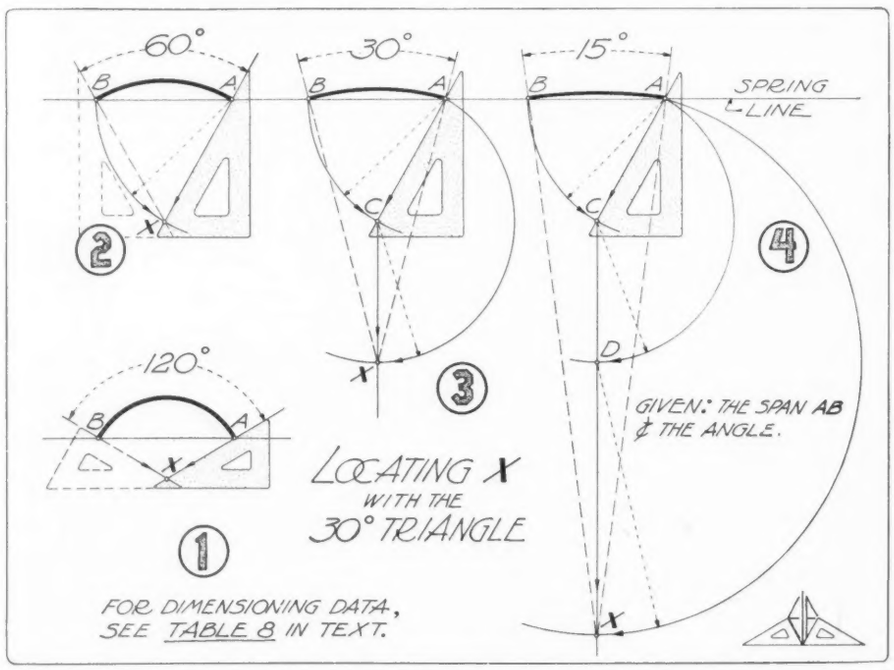

FIGURE 214

the eight-centered one at Diagram "3" is almost exactly 4 to 5.

Not one extraneous line is used in the above layouts. It's all done in a jiffy with the T-square, the 45-degree triangle and the 22½-degree triangle. Almost any desired combination of compound or reversed circular curves can be picked from these three Diagrams. The triangles tell the story. And the dimensioning data accompanying each Diagram, together with the use of TABLE 8, herewith, will yield any dimension wanted, including the lengths of the various chords and arcs.

Let it be assumed that you have used the complete curve shown at Diagram "1" for one purpose or another, and that *S* is a fixed, known, or assumed dimension of 12 feet. All right: then substitute 12′ for the letter *S* in the simple formulas there given, and perform the inferred operations of *multiplication*. The following *dimensions* are then yielded:—

Long diameter *H*	= 23.0112′
Radius *A*	= 18′
Radius *B*	= 11.5056′
Radius *C*	= 3.0204′

Now what is the distance around this complete curve? By an inspection of the layout Diagram, it is readily seen that:

Arc of radius *A* = 45 degrees
Arc of radius *B* = 22½ degrees
Arc of radius *C* = 90 degrees

Then, consulting TABLE 8, you will immediately discover that the:—

Length of a 45 -degree arc = .7854 × its *radius*
Length of a 22½-degree arc = .3927 × its *radius*
Length of a 90 -degree arc = 1.5708 × its *radius*

Wherefore, with its *angle* known, and its *radius* known, the *length* of each arc at Diagram "1" is found to be as follows:—

Arc of radius *A* =	.7854 × 18′	= 14.1372′
Arc of radius *B* =	.3927 × 11.5056′	= 4.5182′
Arc of radius *C* =	1.5708 × 3.0204′	= 4.7444′

But the total curve is compounded of *two* arcs of radius *A*, *four* arcs of radius *B*, and *two* arcs of radius *C*. Wherefore, the required length of *circumference* sums up as follows:—

2 ×	14.1372′ = 28.2744′
4 ×	4.5182′ = 18.0728′
2 ×	4.7444′ = 9.4888′
Circumference =	55.8360′

Now check this result by the purely *graphical* method given at Figure 126 in Part 14.

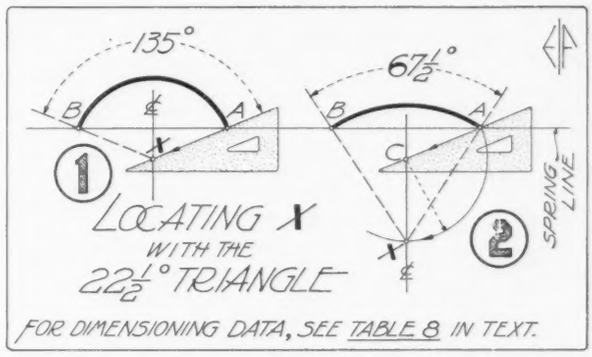

FIGURE 215

Again, by TABLE 8, the *span* of a 45-degree arc is listed as .76537 times its *radius*. Hence, since the *radius A*, of the 45-degree arc, has been found to be 18′, its *span*, or chord *JK*, becomes 13.7767′, or 13′-9-5/16″. Also, by TABLE 8, the *height* of a 45-degree arc is given as .07612 times its *radius*, which, for a radius of 18′, yields its *height*, or rise *N*, as 1.3702′, or 1′-4-7/16″. And, going still further, and by the same typical route, the *span LM*, of the 90-degree arc of *radius C*, is found to be 4′-3¼″; and its *height P* is found to be 10-39/64″. So now, if you like, you can mark on your plan the coordinate *dimensions* that will locate the points *J*, *K*, *L*, *M*, etc.; since the prerequisite lengths of the diameters, chords, and arc heights, have been determined. A further use of TABLE 8 follows, whereby any dimension associated with arcs of the tabulated inherent angles can be found in terms of the known *span*.

Figures 213 to 217, inclusive:

Each Diagram, of each of these Figures, depicts the most expeditious and accurate method of locating the required center *X* for an arc of any given span and of the given inherent angle; no extraneous construction lines being employed.

Figure 213 will be used to explain the simple and typical layout process. At Diagram "1," a given span *AB* is fixed on the board, and it is necessary to find the center *X* such that the resultant arc, of span *AB*, will be a quadrant; in other words, the typical general problem is *to draw a circular arc limited*

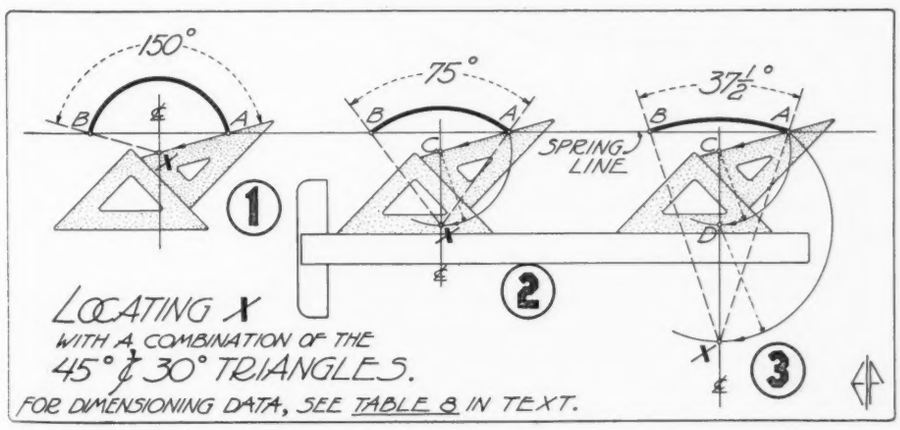

FIGURE 216

TABLE 8
DATA ON CIRCULAR ARCS SUBTENDING INHERENT ANGLES

R = Radius of the arc.
H = Height or rise of the arc.
L = Length of the arc.
S = Span or chord of the arc.



Angle in Degrees	Radius	Height	Length	Span
7½	$7.64489 \times S$	$\frac{.01637 \times S}{.00214 \times R}$	$\frac{1.0007 \times S}{.1309 \times R}$	$.13081 \times R$
15	$3.83065 \times S$	$\frac{.03278 \times S}{.00855 \times R}$	$\frac{1.0028 \times S}{.2618 \times R}$	$.26105 \times R$
22½	$2.56291 \times S$	$\frac{.04924 \times S}{.01921 \times R}$	$\frac{1.0064 \times S}{.3927 \times R}$	$.39018 \times R$
30	$1.93185 \times S$	$\frac{.06583 \times S}{.03407 \times R}$	$\frac{1.0115 \times S}{.5236 \times R}$	$.51764 \times R$
37½	$1.55550 \times S$	$\frac{.08255 \times S}{.05307 \times R}$	$\frac{1.0181 \times S}{.6545 \times R}$	$.64288 \times R$
45	$1.30656 \times S$	$\frac{.09946 \times S}{.07612 \times R}$	$\frac{1.0262 \times S}{.7854 \times R}$	$.76537 \times R$
52½	$1.13048 \times S$	$\frac{.11658 \times S}{.10313 \times R}$	$\frac{1.0358 \times S}{.9163 \times R}$	$.88458 \times R$
60	$1 \times S$	$\frac{.13397 \times S}{.13397 \times R}$	$\frac{1.0472 \times S}{1.0472 \times R}$	$1 \times R$
67½	$.89997 \times S$	$\frac{.15167 \times S}{.16853 \times R}$	$\frac{1.0602 \times S}{1.1781 \times R}$	$1.11114 \times R$
75	$.82134 \times S$	$\frac{.16973 \times S}{.20665 \times R}$	$\frac{1.0751 \times S}{1.3090 \times R}$	$1.21752 \times R$
82½	$.75833 \times S$	$\frac{.18819 \times S}{.24816 \times R}$	$\frac{1.0919 \times S}{1.4399 \times R}$	$1.31869 \times R$
90	$.70710 \times S$	$\frac{.20710 \times S}{.29289 \times R}$	$\frac{1.1107 \times S}{1.5708 \times R}$	$1.41421 \times R$
105	$.63023 \times S$	$\frac{.24657 \times S}{.39124 \times R}$	$\frac{1.1549 \times S}{1.8326 \times R}$	$1.58671 \times R$
120	$.57735 \times S$	$\frac{.28868 \times S}{.5 \times R}$	$\frac{1.2092 \times S}{2.0944 \times R}$	$1.73205 \times R$
135	$.54119 \times S$	$\frac{.33409 \times S}{.61732 \times R}$	$\frac{1.2751 \times S}{2.3562 \times R}$	$1.84776 \times R$
150	$.51764 \times S$	$\frac{.38367 \times S}{.74118 \times R}$	$\frac{1.3552 \times S}{2.6180 \times R}$	$1.93185 \times R$
165	$.50431 \times S$	$\frac{.43849 \times S}{.86947 \times R}$	$\frac{1.4523 \times S}{2.8798 \times R}$	$1.98289 \times R$
180	$.5 \times S$	$\frac{.5 \times S}{1 \times R}$	$\frac{1.5708 \times S}{3.1416 \times R}$	$2 \times R$

For *graphical* location of centers, given the angle and span, see Figures 213 to 217 inclusive, herewith.
For *graphical* development of simple and compound circular arcs, see Part 14.
For arcs having *commensurable* proportions, see Figure 147 in Part 16, and TABLE 5 in Part 17.
For *general formulas* having to do with the circle and segmental arcs, see Figures 151 and 152 in Part 17.

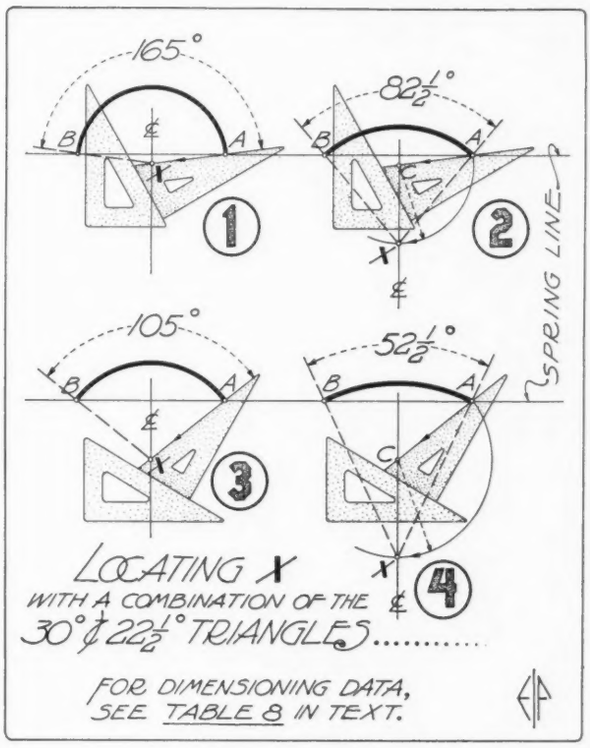

FIGURE 217

by two fixed points and subtending a given inherent angle. Having thus clearly stated a more or less common problem, the ensuing direct solution at Diagram "1" becomes self-evident. But, at Diagram "2," you may say that *X* could also be located directly by projecting a 67½-degree triangle-line from *A* or *B* to meet the known center line of the required arc. And so it could—theoretically. But, practically, the thus-intersecting lines would meet at such a slight angle that their exact point of meeting would *still* remain problematical. Hence, the somewhat less direct method depicted at Diagram "2" is productive of far more accurate *results*. In this case, the point *C* is first located with the 45-degree triangle, as shown, by lines crossing at *90 degrees*—a perfect intersection. (See Part 7.) Point *X* is then located by a swing of the compass, as shown, which also produces a *90-degree* intersection. Note that, by this process, the 90-degree angle *ACB* becomes exactly *halved*, while still maintaining the same span *AB*. The process is of perfectly general application. By a continuation of it, that is, by utilizing each successive center to locate the next, the immediately preceding angle becomes halved. Hence, the required center *X*, of Diagram "2," becomes the progressive center *D* from which the required center *X* of Diagram "3" is located. All of which is merely a practical *utilization* of the well-known-at-college fact that any angle with its vertex on the circumference of a circle is always one half the central angle subtended by the intercepted arc. So there you are—maybe it'll be well-known-in-the-drafting-room—sometime! Why not now? The remaining Figures of this Part require no comment—it's all there. So, TABLE 8 comes again into the discussion to add its final quota to the special short-cutting methods herein recorded:—

Let it be assumed that the circular segmental arc laid out at Diagram "2," of Figure 216 has a fixed span *AB* of 12 feet. As shown, the arc subtends, or shall subtend, a known angle of 75 degrees. What, then, is the radius-dimension, and what is the height-dimension, of this particular arc? Also, what is the length of this arc? Easy! For the particular angle of 75 degrees, TABLE 8 says that the *radius* is .82134 times the *span;* and that the *height* is .16973 times the *span;* and that the *length* of the arc is 1.0751 times the *span.* So go ahead and "figger." Just multiply the picked-off tabulated numbers by 12 feet, the *span*, and the results will accommodatingly become *dimensions in feet.*

The above single example serves again to show the efficacy of TABLE 8. You can quickly obtain therefrom all dimensions and the lengths of the arcs there tabulated, either in terms of the known *span*, or in terms of the known *radius.* Instances where the *radius* was the known quantity, have already been worked out in connection with Diagram "1" of Figure 212.

Now—just to keep in practice—work out the two following problems in *dimensioning;* utilizing the special data hereinbefore recorded. I'll do it too, and you can check your answers with mine, which'll be in *Part 23*, following.

Problem 1 (Dimensioning):

The arch laid out at Diagram "4," Figure 206, has a clear *span* of 10′-10″. What are its other *dimensions, r, R, H* and *L?* And what is the *length* of its intrados?

Problem 2 (Dimensioning):

At Diagram "2," Figure 217, *AB* is the extreme *span* of a Colonial porch roof; 7′-6¾″. What, then, is the *radius* of this 82½-degree arc? And how far will it *rise* above the spring line *AB?* And how long a single sheet of copper, say, would it take to just cover the roof surface from *A* around to *B?*

An Architect Who Went After Business—and Got It

By R. W. Sexton*

In boom times, the city may offer greater opportunities for an architect than a small town does, but in dull periods the small town is far more lucrative. At least, this was the opinion of Warren Shepard Matthews, a New York architect, who, realizing that he had everything to gain and nothing to lose, closed his city office last May and established quarters for the practice of architecture in New Milford, Connecticut, a small town about two and a half hours from New York by train.

He chose New Milford for several reasons. In the first place, it is readily accessible to the New York market; secondly, many New York people have recently built houses in the locality and they might reasonably be expected to be intelligent enough to recognize the benefits of architectural service; and, finally, there were no other architects located in the neighborhood. His first problem, then, was to get acquainted with these people, who lived there practically nine months of the year, and sell his services.

He engaged a secretary, a local girl, highly recommended by the Connecticut Light and Power Company, and who knew the country and the people. They then made a list of all the residents who were reasonably well off, not including the natives, and mailed them cards announcing that the firm was prepared to take care of all kinds of architectural, building, and engineering work, no matter how small or how large. The local newspaper, recognizing the "news value" of a New York architect establishing an office in the town, assisted in the publicity campaign by running an article on its front page.

Realizing that he might be called upon to do some work which required engineering service, Mr. Matthews interested Henry L. Felt, an engineer, in the idea and their card thus bore the name: Matthews & Felt, architects and engineers. Mr. Felt had been a classmate of Mr. Matthews at Princeton, 1912, and had been brought up in this section of Connecticut.

Their offices, located over a store on the main street of the town, cost then $20 a month. They paid the secretary $12 a week, and they rented a small house where the two partners lived for $35 a month. They took with them a foreman carpenter from New York who, for $7 a day, acted as the superintendent on all work, and employed local labor in all cases—including carpenters, plumbers, plasterers, steam fitters, electricians, etc. These men were only too eager to work for the firm and appreciated the opportunity to carry out plans by a registered architect.

Telephone calls soon began coming in asking for opportunities to consult with the firm on various matters. Their first job was to reverse a pair of casement windows from in-swing to out-swing. The owner complained that during heavy rain the windows, as previously hung, leaked badly. The job was done under the firm's superintendence by a local carpenter and the total charge was $30, including labor, material, and architect's fee of 15%. The owner was delighted with the result and the firm's service had been sold 100% to the first client.

With the aid of personal calls, other work began to come in. The firm built a tractor bridge over a brook that ran through a farm and made it necessary for the owner to drive around a main road for a distance of three-quarters of a mile to reach his farm land that was only 300 feet from the house. The bridge cost $210 and the owner probably will save enough money in gasoline charges and wear and tear on his tractor to pay for the cost of the bridge.

The architect found from a personal call that another owner was depending entirely for water on a rain water reservoir. In dry seasons, especially, he had barely enough water to meet his requirements. Mr. Matthews suggested that they run a one-inch water line to a small stream on the property, an eighth of a mile distant. The job cost the owner $326 including a small sand filter, and he has since had no more worries about lack of water or its quality.

In another case, the firm built a turn-around in the front yard of a house where the owner previously had had to back his car in and out of the garage at great inconvenience. A local contractor had at one time submitted a bid of $175 to build the new road, but the firm of Matthews & Felt had a much better plan and the entire charge for architectural service, labor, and materials was $52.

And so it went on, until on October first, four months after the office had been opened, Mr. Matthews reported that the firm had done $36,000 worth of business. Although Mr. Matthews expects to resume his practice again in New York this winter, he has definitely decided to make arrangements whereby he will continue his telephone connection and all calls will be relayed to his city office. And he is even now making plans for enlarging his New Milford office next summer and intends to take two labor foremen from the city to supervise the local workmen. At one time during the past summer he had as many as forty men on the payroll and with a list of three hundred prospects, many of whom he has talked to personally, and with economic matters improved, he looks forward to a better season than he had this year.

*Director, Bureau of Architectural Relations.

NEW ENGLAND
INNS AND TAVERNS

BY HUBERT G. RIPLEY

PHOTOGRAPHS BY ARTHUR C. HASKELL

MEASURED DRAWINGS BY R. I. CARTER &
FRANK CHOUTEAU BROWN

THE MONOGRAPH SERIES
NUMBER 6, VOLUME XVIII
EDITED BY RUSSELL F. WHITEHEAD

INCLUDED SIX TIMES A YEAR IN PENCIL POINTS

FOUR NINETEEN FOURTH AVENUE, NEW YORK

Detail of Front Elevation

COLLIN'S TAVERN, NAUGATUCK, CONNECTICUT

[246]

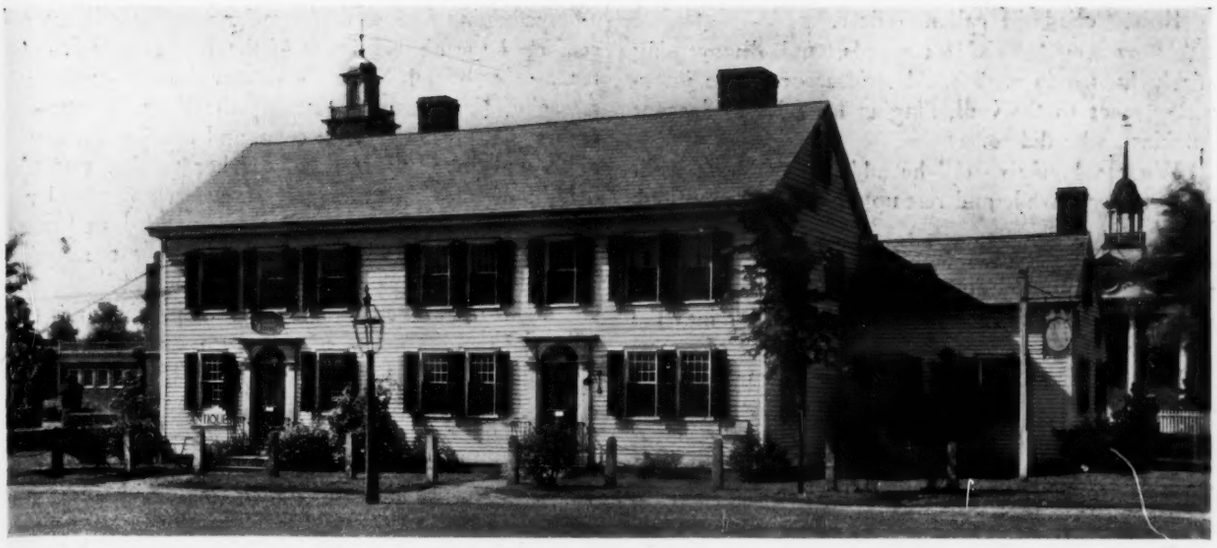

ATKINSON HOLLOW TAVERN, NOW AT EASTERN STATES EXPOSITION, SPRINGFIELD, MASS.

INNS AND TAVERNS

The American Colonies were settled so rapidly that one of the earliest evidences of the new order was the establishment of a string of inns and taverns reaching from Massachusetts Bay to the Carolinas. The seaports, of course, had to provide accommodation for the constant stream of new arrivals, until they could find homesteads and build the lovely old houses, churches, court rooms, and town offices, many of which, so well were they designed and constructed, are still cherished monuments of XVIIth and XVIIIth century culture. The Old State House in Boston and the old court room in Yorktown are splendid examples of the Georgian style, than which no finer exist any place.

The designations "Inn" and "Tavern" are used interchangeably, though in comparatively recent times "Tavern" has come to mean a place where food and drink were served to travelers, while "Inn" means that lodging also may be had. What fragrant memories cluster around the mention of "The Bell in Hand," and "The Old Elm," for example, "The White Horse Tavern" and "The Bunch of Grapes" in Kingston. It was in this latter hostelry that the great American cocktail, at first christened the cock's tail, was invented. Whether the original Bunch of Grapes is still standing, I scarcely know; probably it was destroyed when the British, under Sir Henry Clinton, burned the town in 1777. Anyhow the history of the cocktail (whether authentic or not is immaterial) is a poetic legend and so fraught with romance that the telling of it may not be out of place here. We are indebted to "The Bumper Book," New York, 1899, for the tale that runs as follows.

Squire Allen, bluff and hearty, face a deep *bois de rose* o'erspread with indoor tan, dispensed good cheer to all comers at the aforesaid Bunch of Grapes. None need leave the Tavern thirsty whether possessed of the medium of exchange or not, for mine host kept a blackboard behind the bar, on which the customer's score was chalked up when specie or barter lacked. Good ale and strong drink flowed freely, and the Squire's buxom daughter, Betty, assisted her father in caring for the wants of the guests. When the stage coach from Albany arrived and the driver pulled in his foam-flecked horses, it was a busy time for them both, and Betty, her apron strings fluttering in the fresh breezes, her rosy cheek "like a Catharine pear, the side the sun shone on," as Sir John Suckling puts it, skipped lightly from table to table under the old apple tree with pewters of ale, trays of glasses, bowls of loaf sugar and water from the Old Well Sweep. Her father followed, a wicker covered demijohn under one arm, a black bottle of Sour Mash in hand, and a merry greeting for all.

When Leftenant Titheridge, with his hardy recruits, tall gallant fellows recently returned from the Plains of Abraham, appeared one day, and drew up his squadron in the yard between the early American wagon sheds with their row of elliptical arches, and the great hay barn, Betty was at the Well Sweep.

"Halt!" cried the gallant officer.

"Allow *me!*" were his words, and dismounting quickly he strode with rapid strides across the intervening space to the well, flinging his reins to Sargent Simpkins as he did so.

"What a lovely spot!" he added. "I think we'll stay here for a while and rest up a bit. You men look tired."

As he spoke these words, his muscular arms manipulated the well sweep and, despite Betty's protestation, he carried two full buckets of ice cold water into the kitchen with the ease and familiarity bred of active outdoor life combined with the grace of manner that betokened a gallant soldier not unfamiliar with the salons of the quality.

"Oh sir!" said Betty, dropping him a curtsy, "I thank you. You must be awful strong!" and she blushed prettily and looked down in modest confusion.

"Du tout!" replied the leftenant lightly, for he spoke French fluently, and was fond of displaying his knowledge. In the midst of the slight embarrassment caused by the unexpected meeting of two extremely attractive young people of opposite sex (such an embarrassment would be most unusual nowadays, it may be said) the Squire appeared.

His face was like a thundercloud, the cause of which was not long in appearing. It seemed that the Innkeeper was greatly addicted to the sport of cock-fighting and inordinately proud of his prize cock Excalibar, whose valour and skill in the cock-pit were renowned throughout the countryside. The exploits of this lusty fowl had gained not only a redoubtable reputation for its owner as a trainer and sportsman, but had also resulted considerably to his pecuniary advantage. Many envied him the possession of such a paragon, and, indeed well they might for never before in three counties had been seen such noble courage, finer breed, and staying qualities than displayed by this young hero of many a cocking main. His age was three years and seven months and he tipped the scales at 4 lbs. 14 oz., a very knight among birds with a plumed tail worthy of Agamemnon's crest. For two days Excalibar had been missing, the Squire had hunted for him high and low throughout the neighborhood and among his corn cribs. Nowhere could a trace of him be discovered. The prince of birds had been stolen!

Leftenant Titheridge looked thoughtful as he recalled a half-forgotten incident of the hike down the river, but he said nothing. It was solemn and dismal cheer for the guests that night at the Bunch of Grapes. Shortly after daybreak the next morning the young officer rode away, bidding his men await his return. Everyone at the Tavern was disconsolate. Even Sargent Simpkins, a fine upstanding young man with a prepossessing face, and an eye for a pretty gell, scarce remarked the nimble figure of the Innkeeper's daughter as she busied herself with her household duties, sweeping the taproom, sanding the floor in graceful arabesques, plucking green corn, and tending the marigolds and johnny-jump-ups, for her garden was the delight of all visitors. Night drew on apace and no leftenant appeared. Again a gloomy and dismal meal while the candles guttered unsnuffed and the Squire smoked pipe after pipe, refusing all conversation.

As dawn, the rosy fingered, came peeping o'er the hills, Sargent Simpkins felt a touch on his shoulder.

"Qui va la?" he muttered sleepily, for he had picked up a smattering of French during the hardships of the Quebec campaign.

"Je," whispered the voice of Leftenant Titheridge, for it was indeed none other. He held something indistinguishable in the half light. It was Excalibar unharmed and in all the glory of his plumage, brilliant as when the rays of the rising sun tip with iridescent glow the towering walls of the Fred F. French Building on Fifth Avenue, or the first view of the 1933 Chicago World's Fair startles the astonished visitor.

The sensitive ear of Squire Allen, a light sleeper, caught the whispered conversation in the adjoining room, and slipping quickly into his small clothes, he pushed open the door. Catching sight of his matchless bird, he uttered a great shout that aroused the entire household. Soon the room was filled with a joyous throng of guests, retainers and soldiers. Even Betty, with a green joseph thrown hastily over her night rail, peeped shyly in with admiring glances at the handsome young officer who, after searching far and wide, had returned triumphant with his quarry. Fully recovered from the spleen and black humor of the past three days, the overjoyed host called for the best breakfast the house afforded, while Betty slipped off hastily to put into execution an idea of her own. Let us quote an extract from the tale itself.

> "Now whether it were from excitement or nervousness, or whether, perchance, mistress Daisy had before discovered the secret, and held it close for a great event, certain it is that she mixed sundry drops of bitters and wine of roots, with a dram of good Kentucky whisky, the whole poured over some generous bits of ice (not a little luxury in itself), and they all drank of the beverage "to the cock's tail"—for Jupiter had not lost a single feather. And then the gallant leftenant sware bravely that, in memory of the event, the delectable mixture he had drunk should be known as a cock's tail through all the army."

[Note. The author seems a bit confused. He calls the charming inventor "Betty" instead of Daisy,

(Continued on page 255)

THE RICE TAVERN, KITTERY, MAINE

THE RICE TAVERN, KITTERY, MAINE

[250]

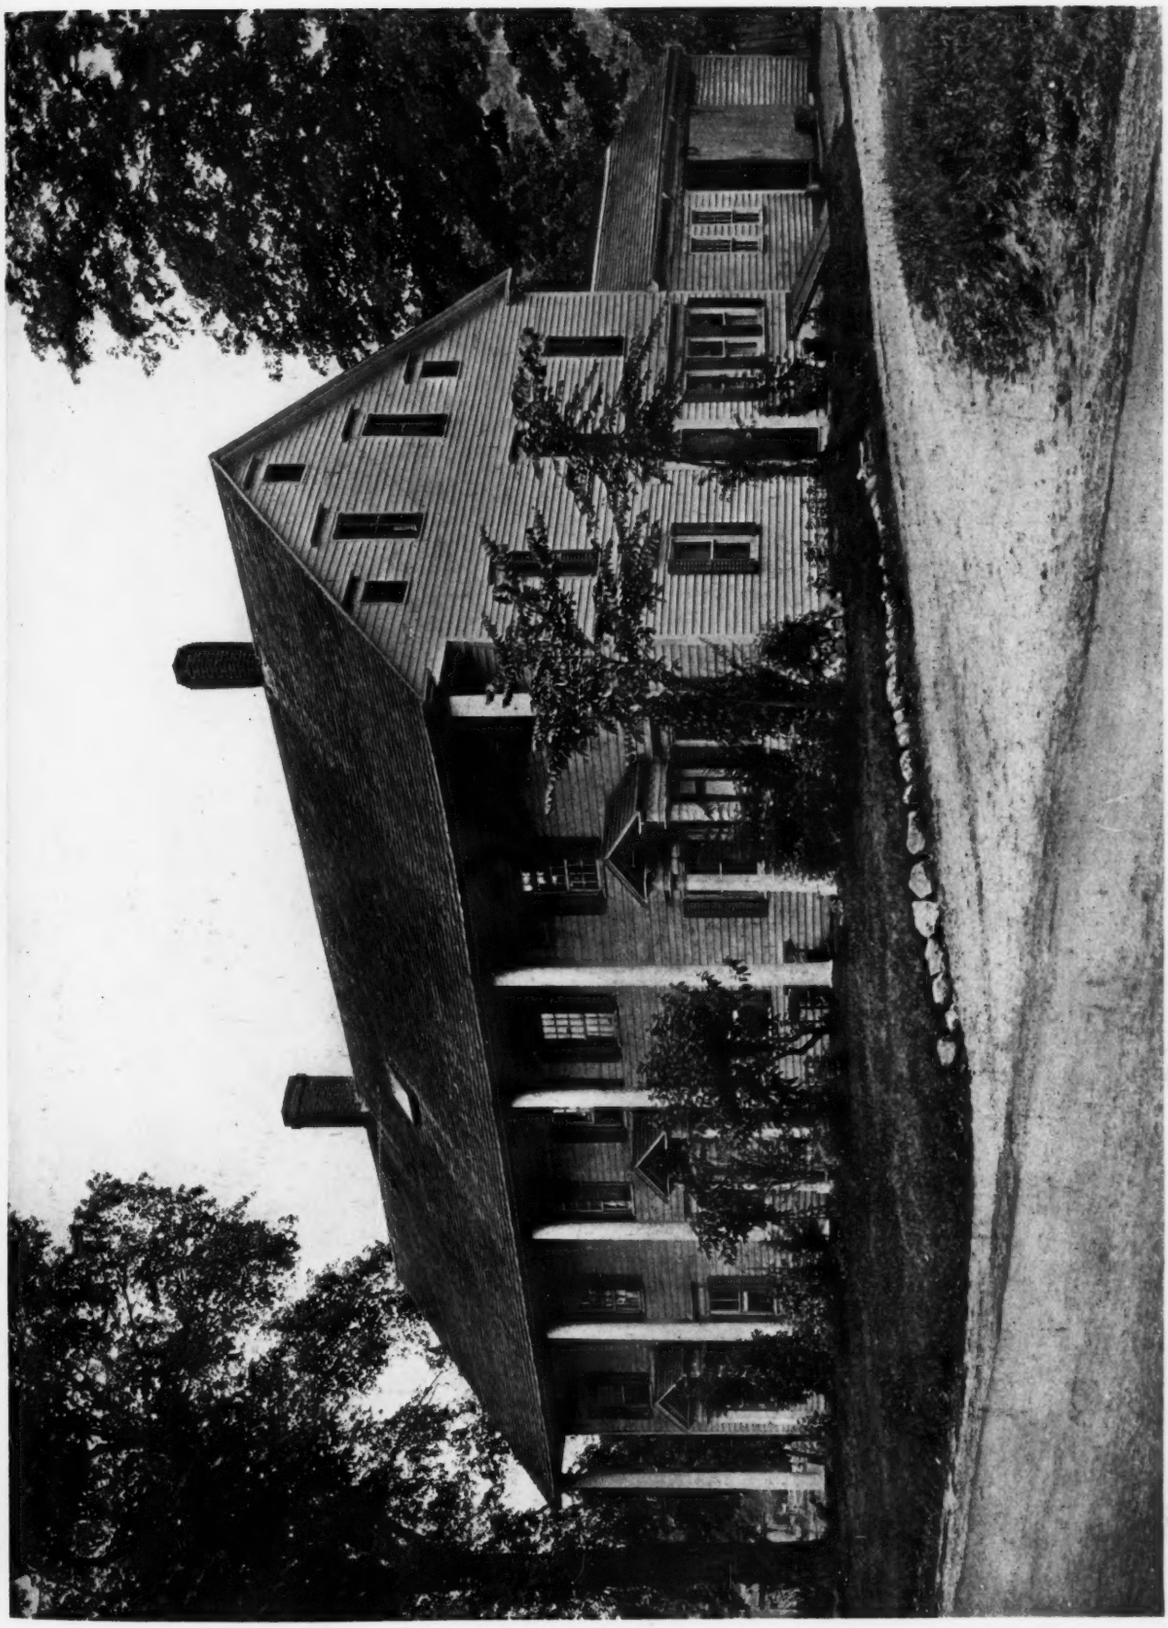

COLLIN'S TAVERN, NAUGATUCK, CONNECTICUT

Detail of Front Elevation

WAYSIDE INN—1686—SUDBURY, MASSACHUSETTS

[252]

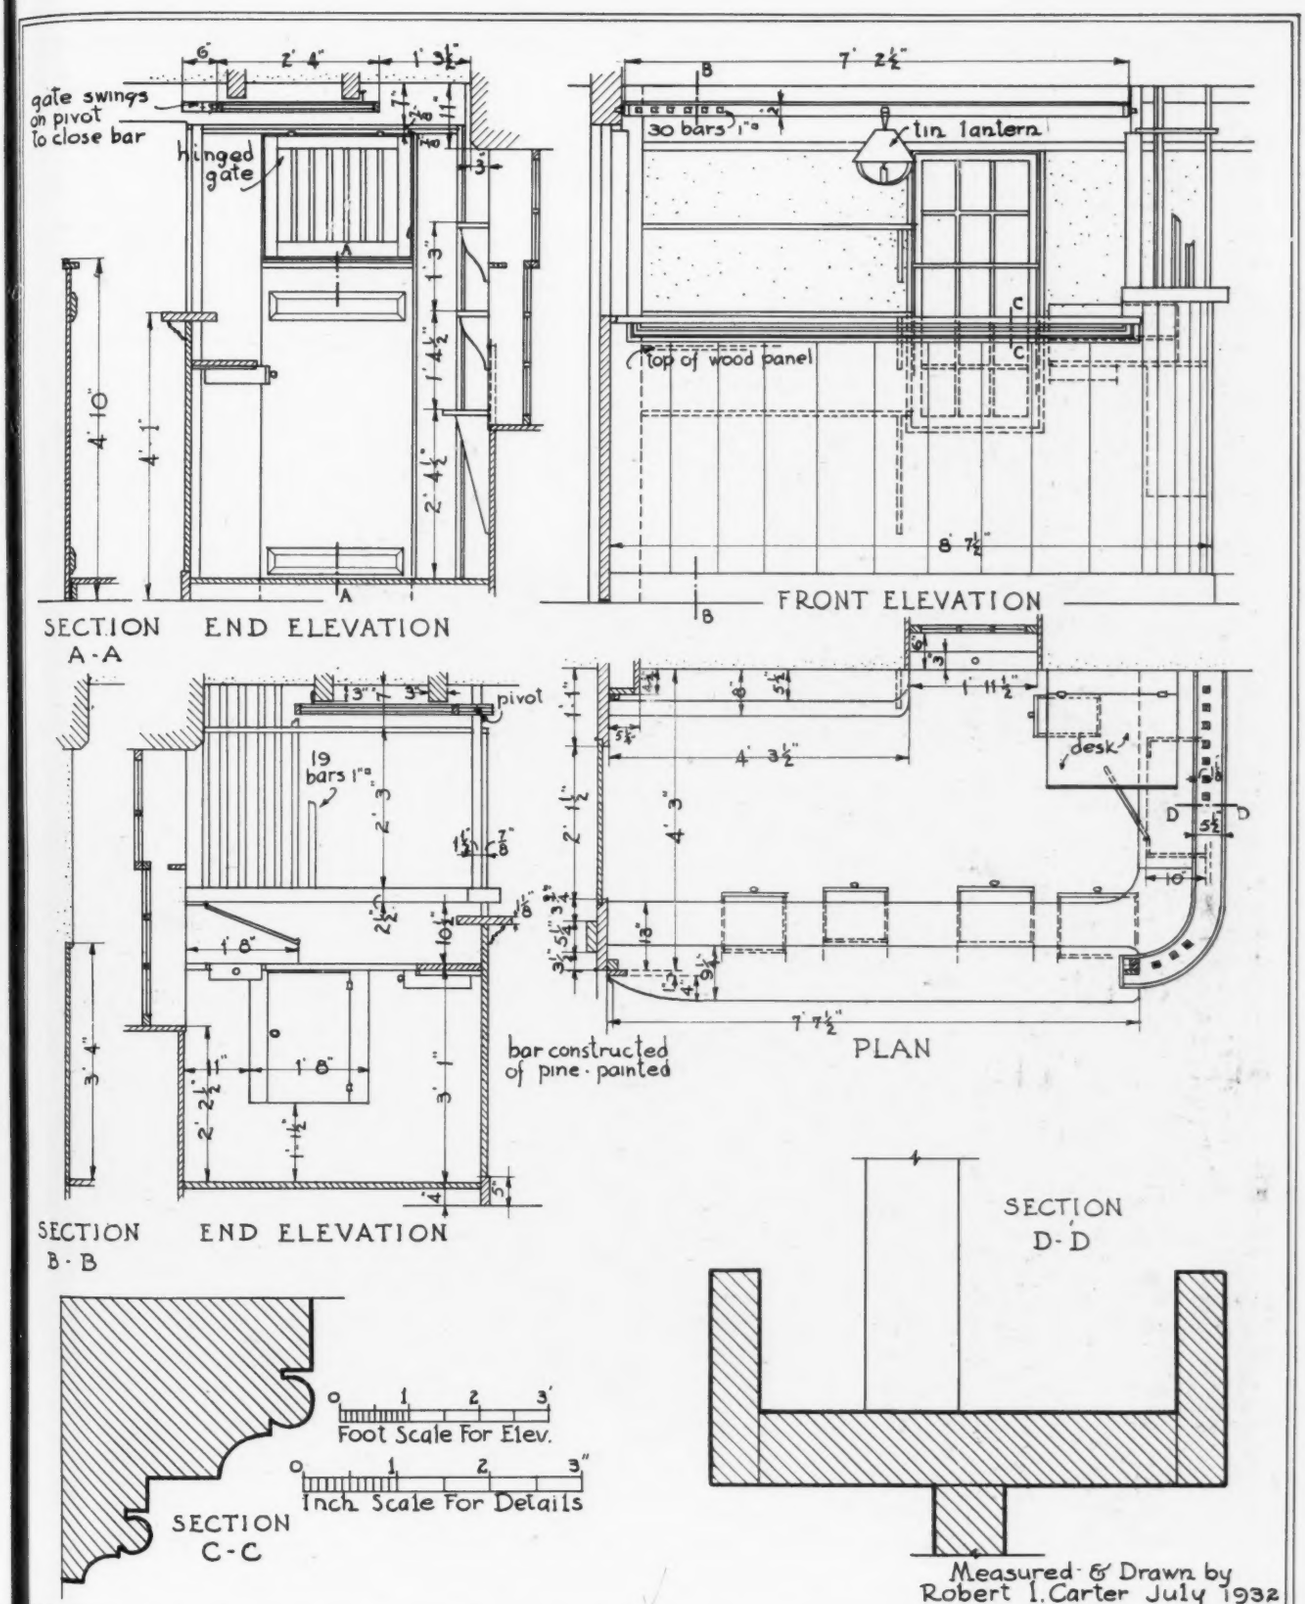

TAP ROOM

THE WAYSIDE INN Built about 1686 SUDBURY, MASS.

Drawing reproduced exactly at scale marked.

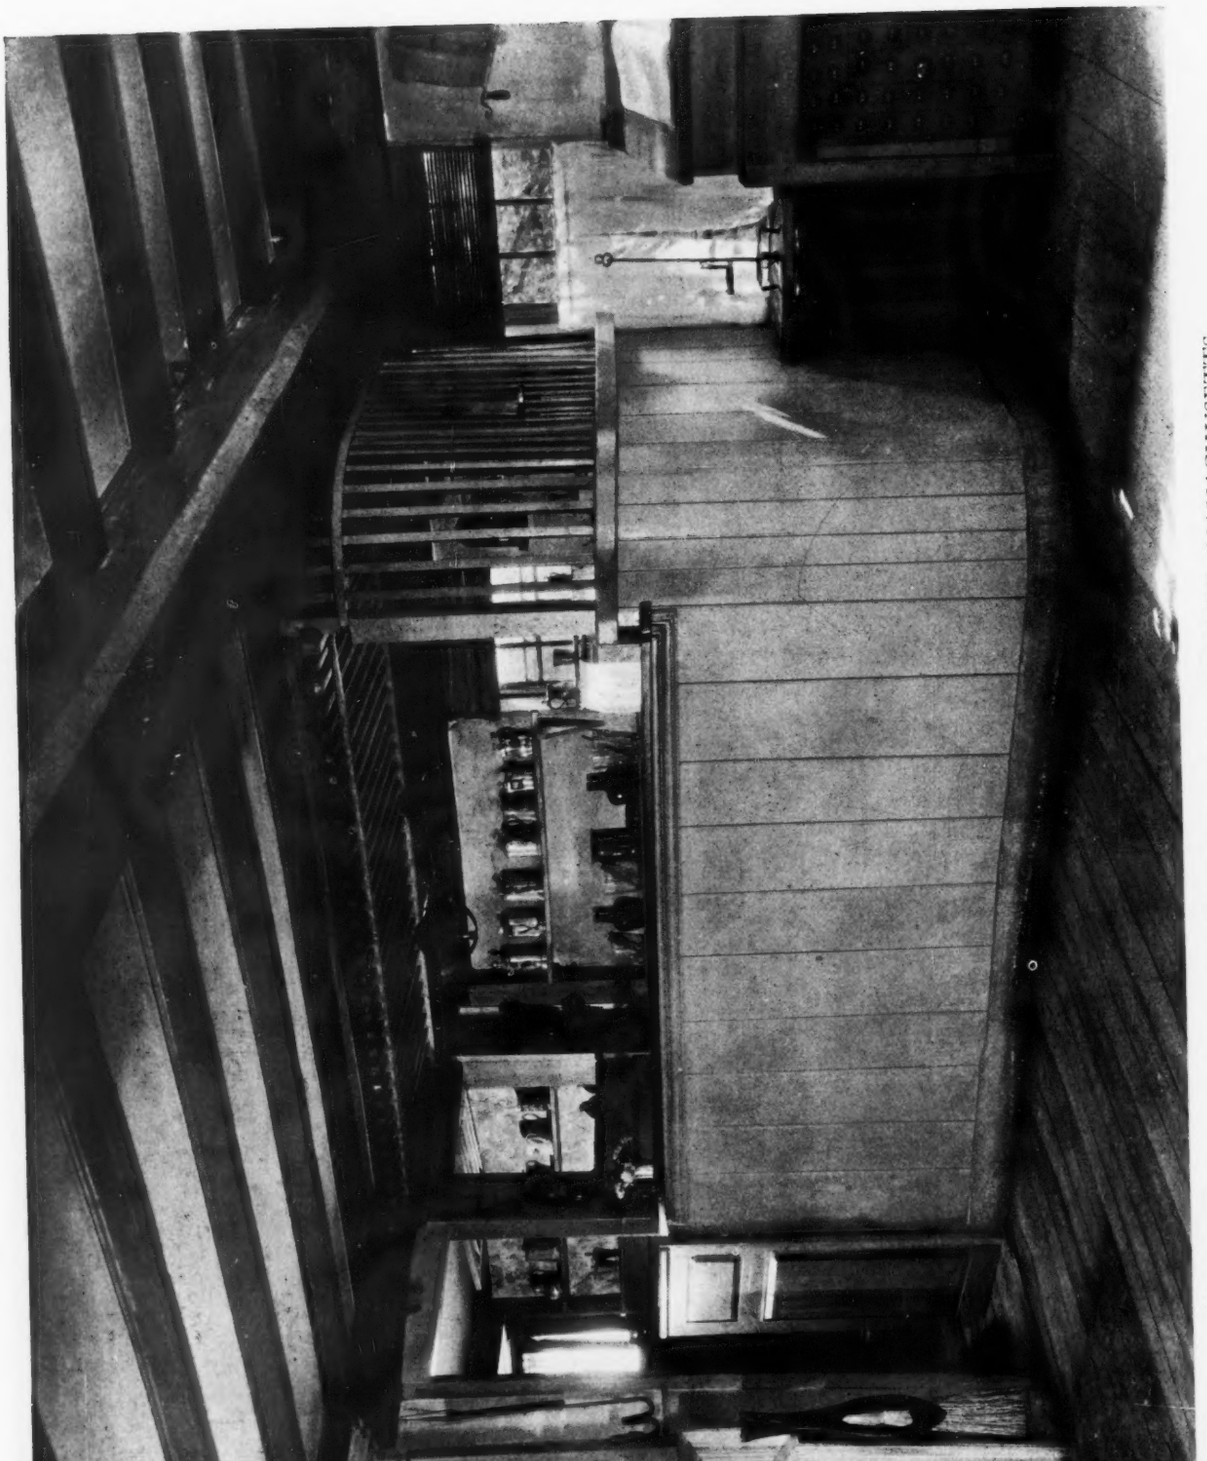

TAP ROOM AND BAR—WAYSIDE INN—1686—SUDBURY, MASSACHUSETTS

[254]

and the gallant cock "Excalibar" instead of Jupiter. *Ed.* Well, maybe I did, memory plays us pranks at times, but what of it? *Author.*]

The subsequent adventures of Leftenant Titheridge and Betty [he means Daisy, *Ed.*] is not strictly concerned with the subject of New England Inns and Taverns and need not be dwelt on further. Interested students and Antiquarys will find more of it in the "Bumper Book," together with other timely knowledge.

One of our early recollections was a visit to the famous "Bell in Hand," located for over a hundred years in Pi Alley, Boston. This was strictly a Tavern and no other beverage, not even water, was served save good stout ale. Brie cheese, cold meats, coarse bread and hot mutton pies were available for the modest sum of five cents for each item. A "half with a dash," was the customary order, meaning a half mug of ale with a dash of porter. The ale was Bass', imported in barrels, and besides this a very special brand called Union Ale, which was smooth as silk and strong as the Hercules of Lysippus. About three full mugs of Union and you felt as if slammed by the Hero's club. The porter was bitter without being acrid, and seemed like velvet to the tongue. When drunken with brie cheese, its full flavor could best be appreciated. Customers almost always ordered half mugs (nothing but pewter was used in the tavern, by the way) in the belief that two halves were greater than a whole, yet so canny was the skill of the burly tapsters who drew the precious fluid, great husky lads with mighty arms, that it was a toss up either way. We've tried the experiment several times and never found that two halves caused an overflowing when poured together.

Many famous men were the inn's customers, and while the place was severely simple, Early American in character with wide pine boards and sanded floors, low ceilings and a few old prints on the walls, and while the clientele included almost every strata in our complex civilization from the highest to the lowly, I've never observed unseemly behavior or conduct that could be classed as an offense against good taste. When such men as Judge Palmer, the well-known authority on jurisprudence, Lieutenant Colonel Will, U.S.A., A.I.A., P.D., etc., etc., and Chelsea Joe, that polished devotee of the goddess of chance, patronize an establishment, one may safely follow in their footsteps.

Then there was "The Old Elm," a tavern that lent distinction and the aura of its personality to Tremont Street Mall in its declining years. This place was named from its proximity to the Washington Elm that grew opposite it on Boston Common. (The original Washington Elm was in Cambridge, of course, and the one on the common an offshoot from the parent stem.) Maybe there was once an "Old Elm" near the Cambridge tree, I don't know. Food was the main idea there, and the best *beer* in Boston, according to the local connoisseurs. We had our first glass of beer there when a student at Tech, and as I recall the incident, I was not greatly overjoyed by the experiment. It tasted strange and bitter. Since then, experience and wisdom have demonstrated the many excellent qualities of this ancient beverage when used with discretion. Weisse beer was also served there in babble glasses, great huge mugs holding a gallon, like the famous "*formidable*," at the "Brasserie Lipp."

"The Old Wayside Inn" in Sudbury is perhaps the best known of all New England Taverns as the setting of the delightful tales of the lovable transcendentalist of the Golden Age. Though marred somewhat by the vandal hand of the great apostle of standardization and exploitation, it still retains much of its original charm when seen from certain view points, in spite of the absurdities of recent additions and strictures as to freedom of action imposed on its guests by the policy of its present owner. There are lovely old bedrooms, furnished right up to the last word of the present-day interior decorator's idea of just what an Early American bedroom should be, many pieces of really good old furniture, and the old bar and dining room practically as was, as far as anybody knows. There are glass cases containing General Witherspoon's sword belt worn at the battle of Bennington, some old pewter, a spinning wheel in the front hall that tangles up people's feet and warming pans and trivets and trammel irons (whatever they are) galore; quite a store of junk when all is told. The front porch is punk, but the clapboards on the walls, still painted the same old exquisite shade of salmon pink it has always worn, and the sweep of the hospitable gambrel, are still worth going miles to see.

Many of the old inns, like the Wayside, are still doing a thriving business eight or nine months of the year, due to the motoring craze which is becoming popular again this fall. It really is great fun to drive through the brisk, snappy air of late autumn or early spring, or even through any air at all seasons, and find broiled chickens and candied sweet potatoes awaiting one. Some places they let you put the bottle right on the table, but mostly, on arrival, one has to sneak out behind the shed where they keep the harrows and the plow shares and say, "Here's how!" to the astonished cows. Not like the old days when they had real parties in these hallowed halls, beginning at two o'clock in the afternoon and lasting until breakfast time the next morning. Feasting and square dances and hard cider spiked with New England rum, and a bit of bundling perhaps, if the old records may be trusted. But dear me! here's the space all used up before the story's scarcely begun.

HUBERT G. RIPLEY.

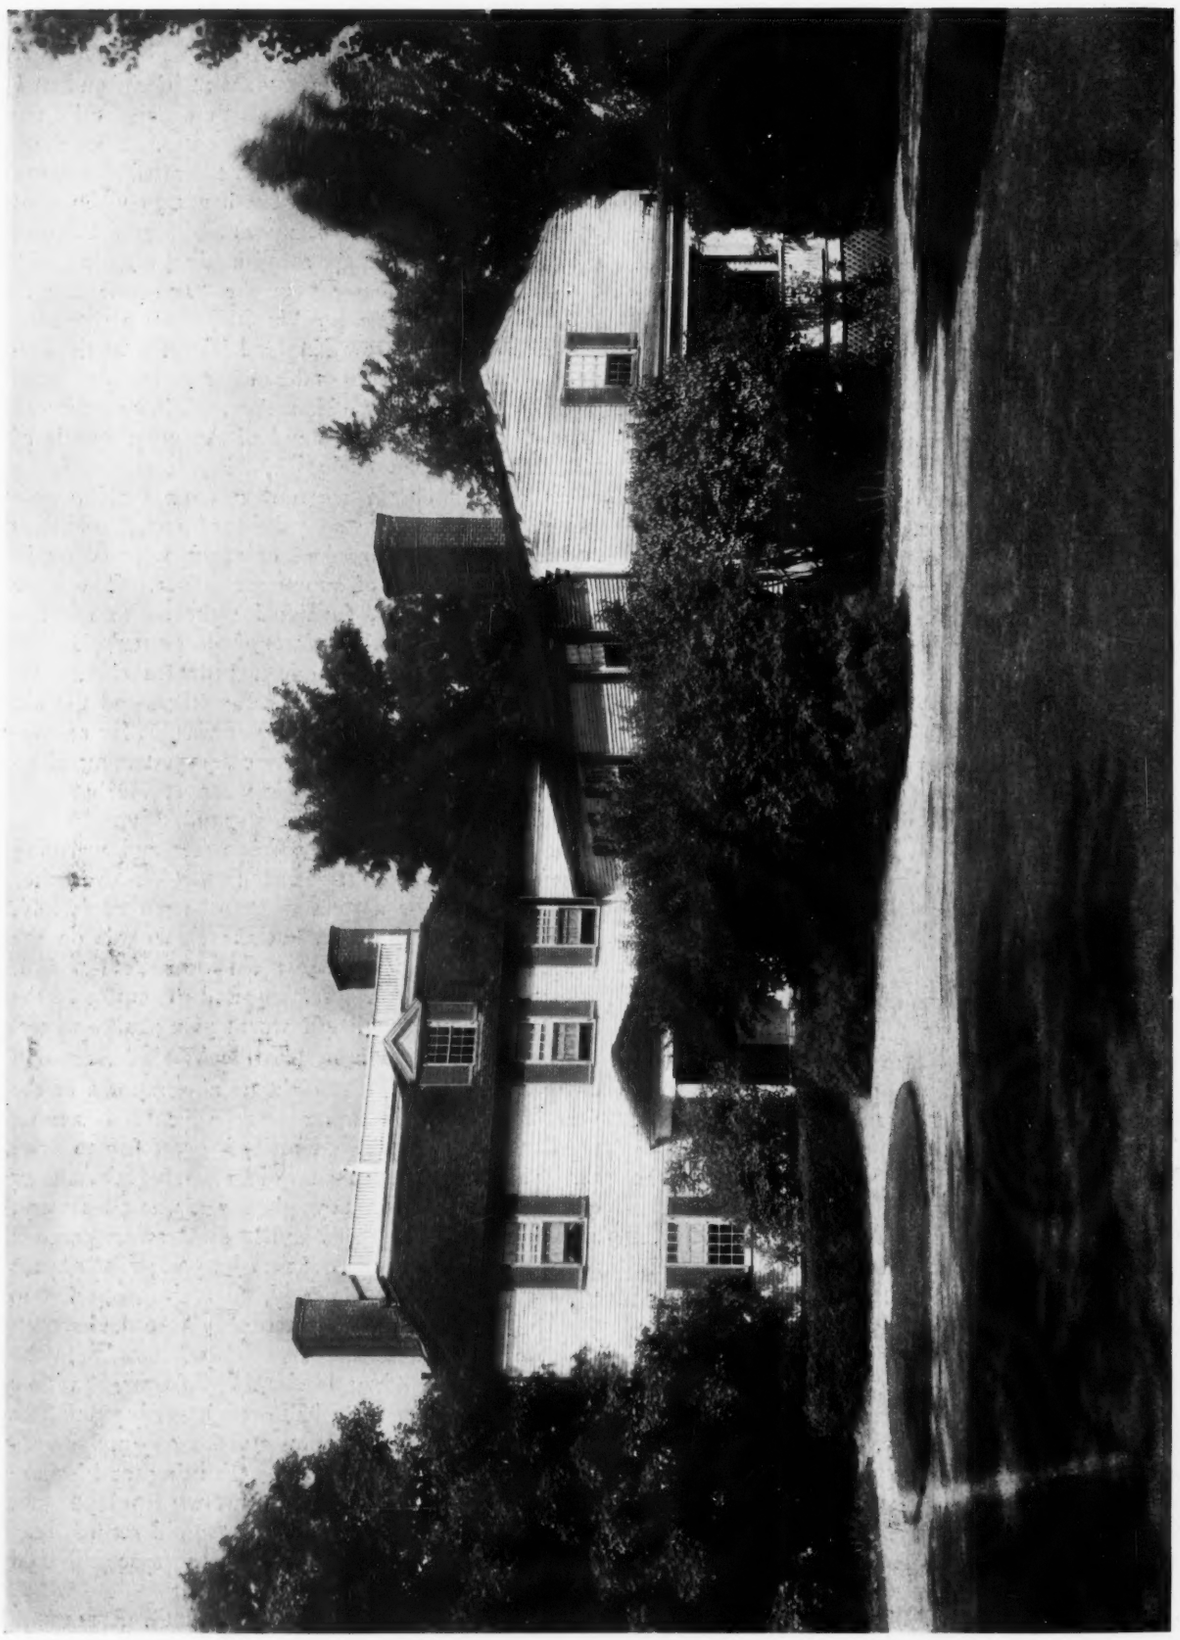

THE WILSON TAVERN—1797—PETERBOROUGH, NEW HAMPSHIRE

[256]

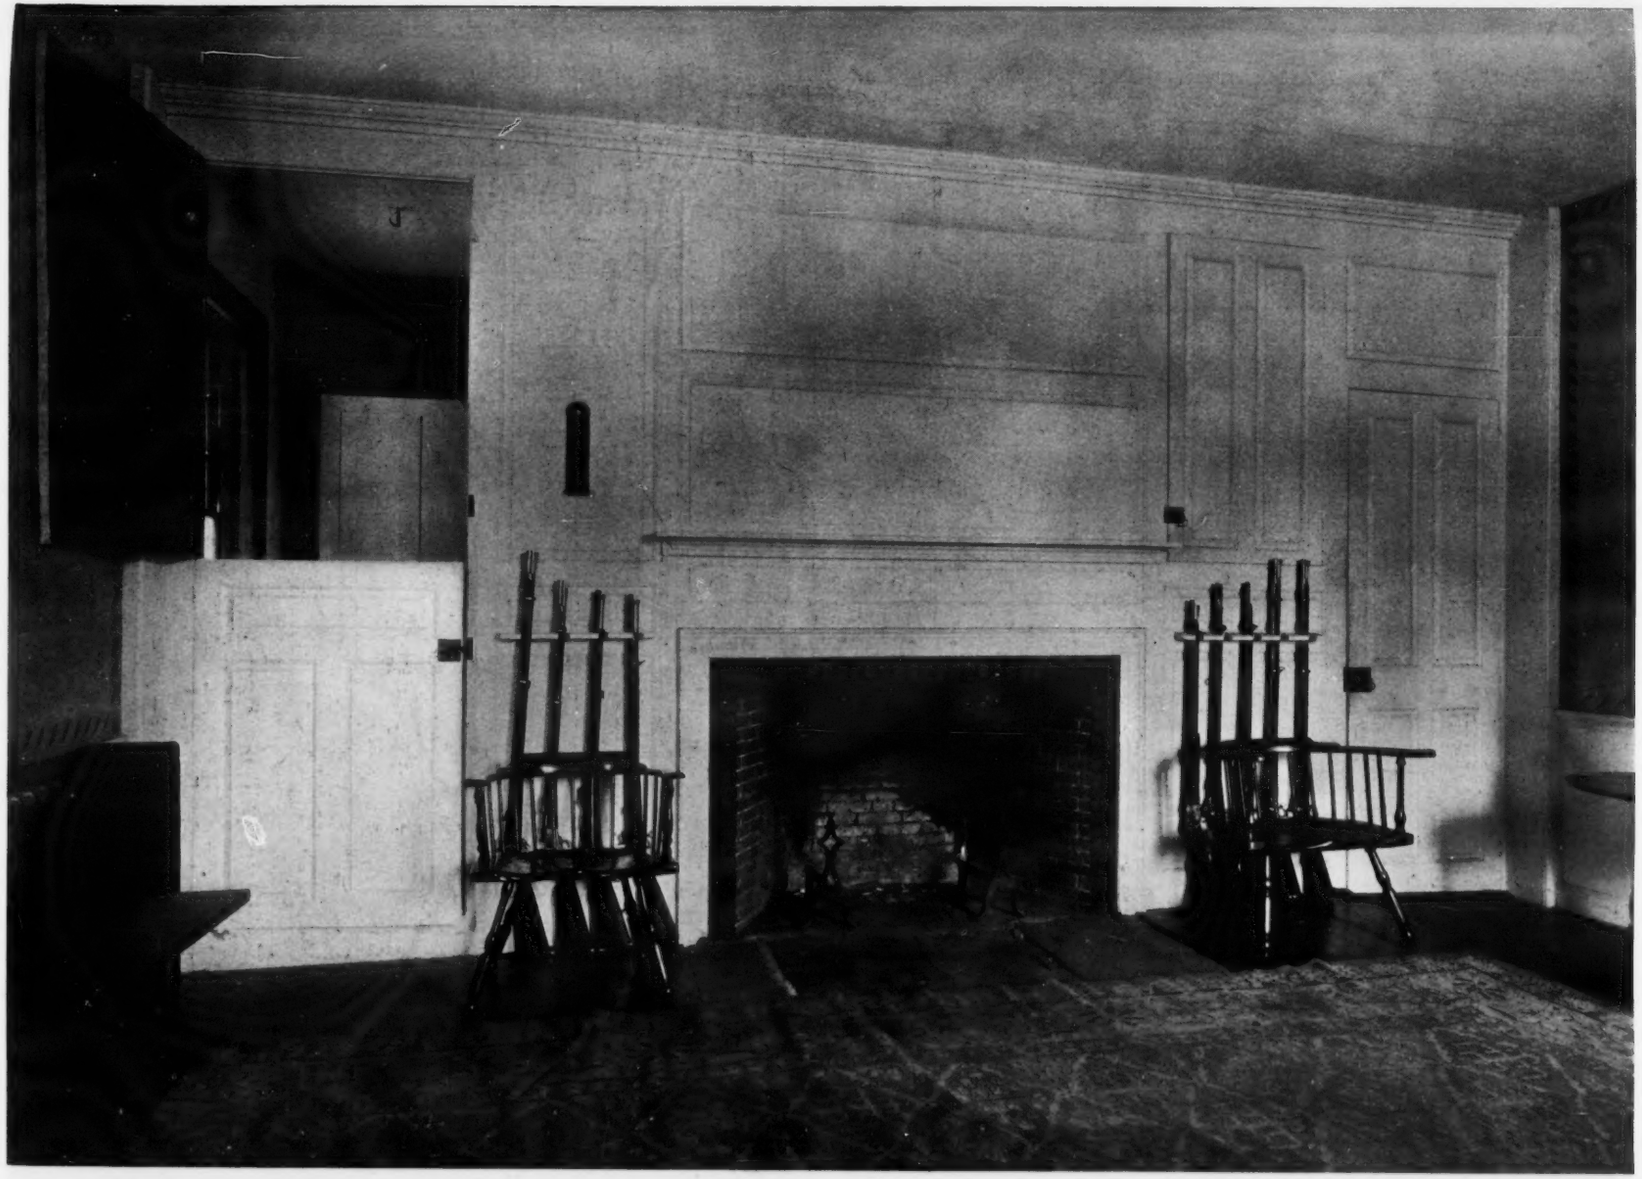

(Measured drawings of this paneling and of adjoining bar on following page)

TAP ROOM—THE WILSON TAVERN—1797—PETERBOROUGH, NEW HAMPSHIRE

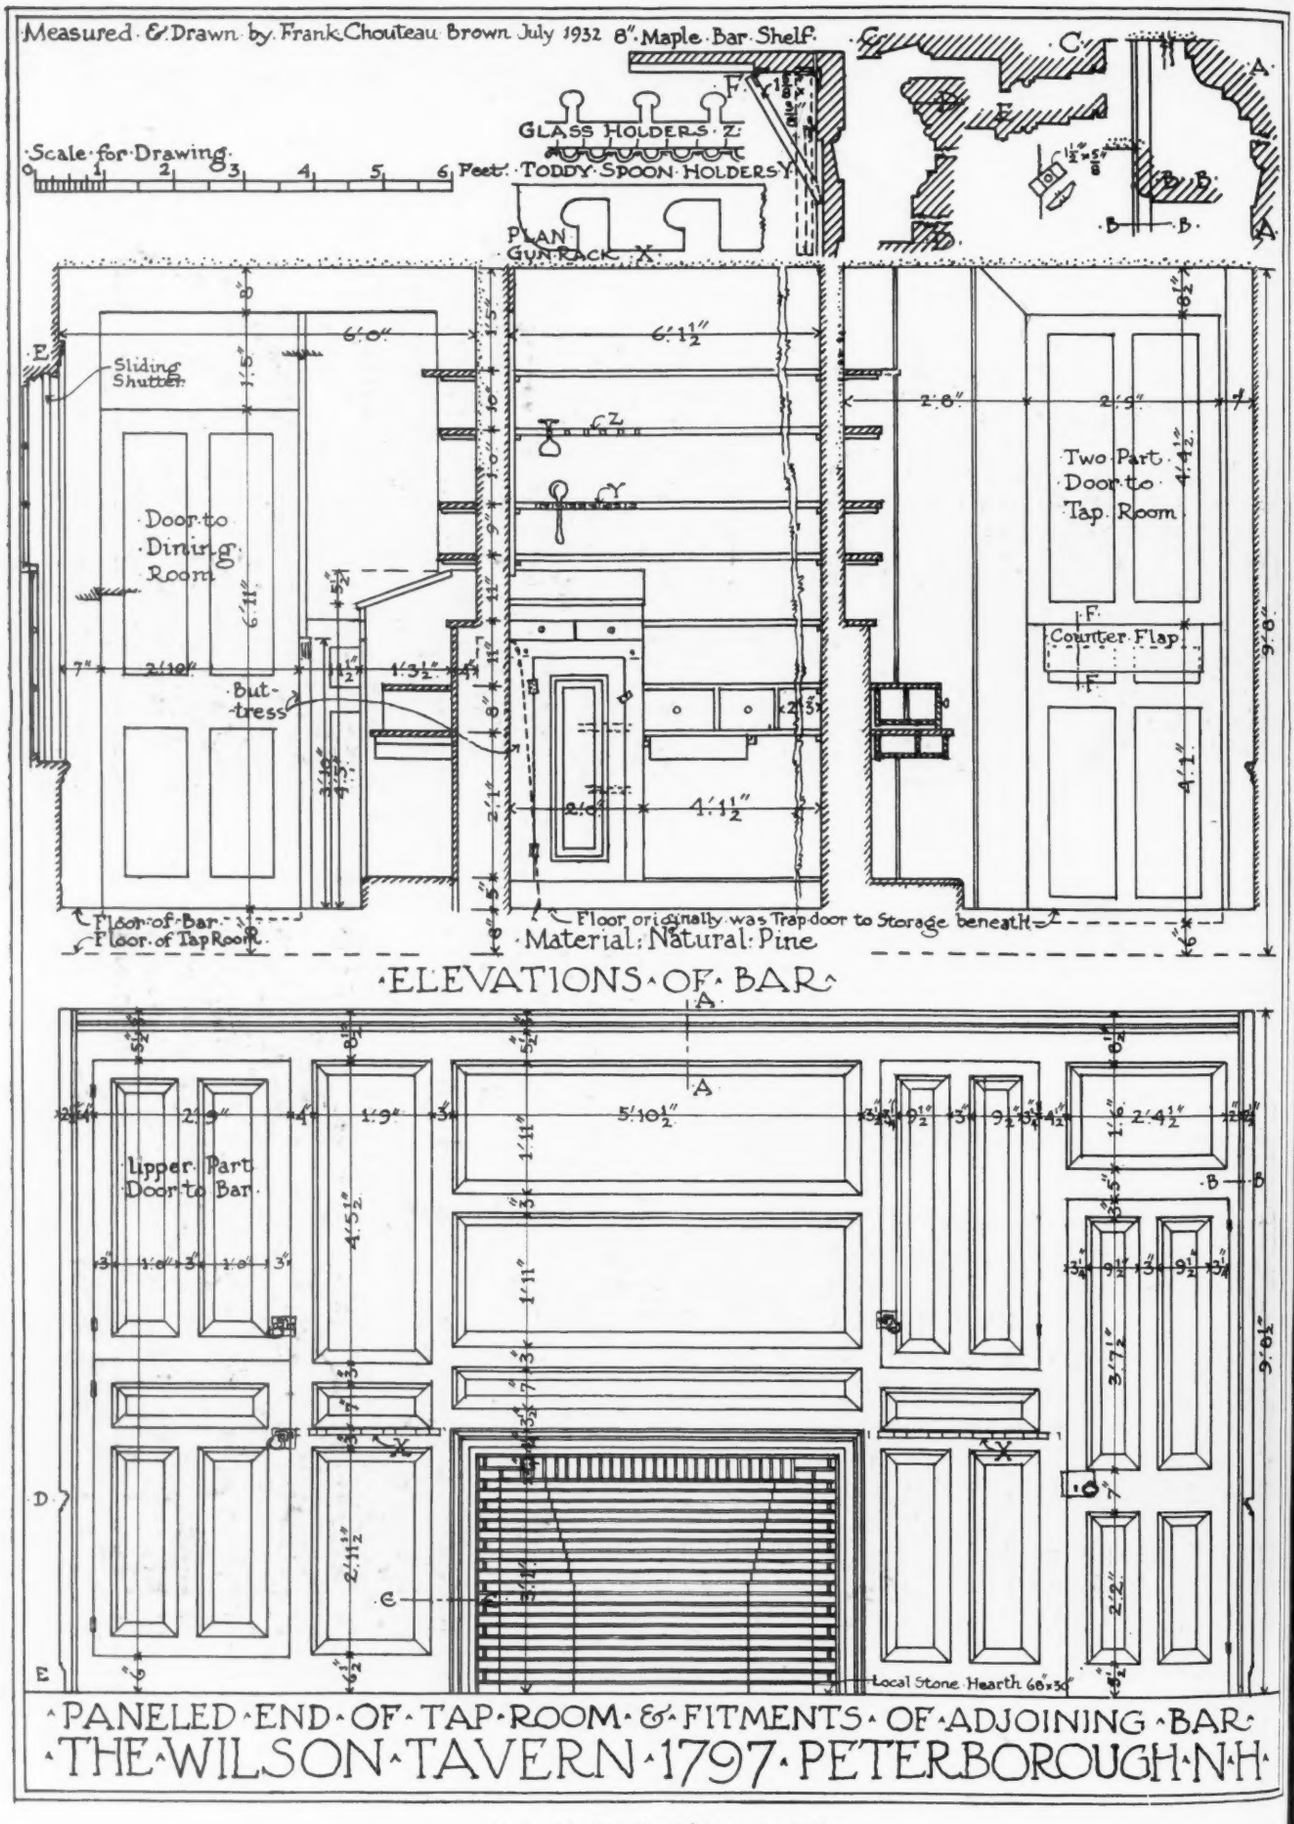
Measured & Drawn by Frank Chouteau Brown July 1932
8" Maple Bar Shelf
Scale for Drawing
Feet
GLASS HOLDERS Z
TODDY SPOON HOLDERS Y
PLAN
GUN RACK X
Sliding Shutter
Door to Dining Room
Butt-ress
Two Part Door to Tap Room
Counter Flap
Floor of Bar
Floor of Tap Room
Floor originally was Trap door to Storage beneath
Material: Natural Pine
ELEVATIONS OF BAR
Upper Part Door to Bar
Local Stone Hearth 60"x36"
PANELED END OF TAP ROOM & FITMENTS OF ADJOINING BAR
THE WILSON TAVERN 1797 PETERBOROUGH N.H.

Scale for details, 1/8" to an inch

[258]

OLD MILFORD TAVERN, MILFORD, NEW HAMPSHIRE

TAVERN—1774—WEST TOWNSEND, MASSACHUSETTS

Entrance Porch

OLD MILFORD TAVERN, MILFORD, NEW HAMPSHIRE

[260]

Modern Heating Methods

A Discussion of Recent Advances in the Industry and Their Reflection in Building Design of Today

By Harold L. Alt

Editor's Note:—*The items covered in this discussion are limited to those which have been on the market and in use for a sufficient length of time so that the author, an active and well known heating engineer, is fully posted as to their practicability and satisfactory operation, at least in some degree under actual operating conditions. Very recent developments, such, for example, as the new complete oil-burner-boiler unit now being made by several leading manufacturers, are not covered since the author does not feel that he can yet give an authoritative opinion, based on experience, as to their merits.*

Tremendous strides in heating have been made during the last decade—which practically includes all the time intervening since the great war owing to the fact that, although the armistice was signed November 11, 1918, it was some time before factories and personnel could be brought back to a peace time standard and still further time had to elapse before new and improved equipment could be manufactured and placed on the market. By 1922 the influx of new and improved designs was well under way and has continued, in almost uninterrupted flow, from that time until the present with the likelihood of extending indefinitely into the future. This is largely owing to the keener competition now existing due to the depression which has taken heavy toll of the building industry in the last three years including not only the industry but architects, engineers, railroads which transport the material and, in fact, reaching into every channel of American business. Along with the others, the manufacturers of heating materials and devices have been just as hard hit and have reacted by turning some of their surplus energy to developing improved designs.

Now that all indications point to a gradual resumption of the normal flow of business which soon will affect every line of endeavor, it behooves one to stop and take stock of what the last few years have brought forth, especially of those things that are really worthy of notice and deserve general adoption in the heating plants of the future. For this purpose, the subject will be divided into the three general heads of radiation, heating systems, and heat production, and an effort will be made to summarize the major and outstanding features which may be included in each classification. Of course, in an article of this character it is impossible, simply because space limitation forbids, to note and describe every device which may be well worth mention, but we will endeavor to point out the revolutionary changes and those involving radical departures from what might be regarded as former standard practice.

Direct Radiation

The architect is most intimately concerned with the radiator and dislikes the appearance of the common cast iron exposed radiator, ordinarily termed a "direct radiator." Shortly after the war the-then-new type of *tubular* cast iron radiator was placed on the market in an effort to meet the objections architecturally voiced against the ungraceful appearance of the standard *column* radiator (see Figure 1) which up to that time had been practically the only type of direct radiator offered outside of the wall radiator (see Figure 2) still being used today. Numerous advantages were pointed out as assets of the tubular radiator such as a larger number of small columns giving added surface, a more artistic design, and so on. Subsequently the manufacture of column radiation gradually dropped off until it ultimately was discontinued altogether. Today the tubular radiator (see Figure 3) may be regarded as the standard cast iron radiator although some other designs such as the flat front radiator, for installation in recesses under window sills, and a special type of radiation resembling tubular but more compact, may be obtained.

The fact remains, however, that the tubular cast iron radiator has lost ground in recent years and that—like coal which still is King—heavy inroads have been made on

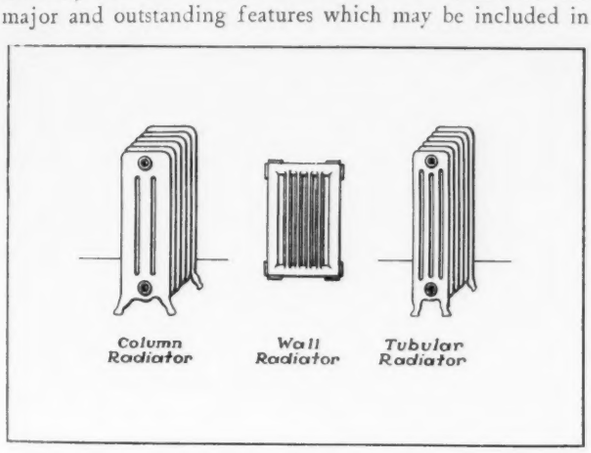

FIGURES 1, 2, AND 3

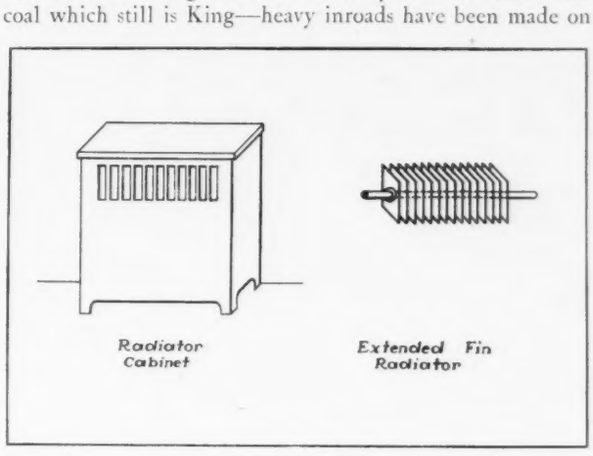

FIGURES 4 AND 5

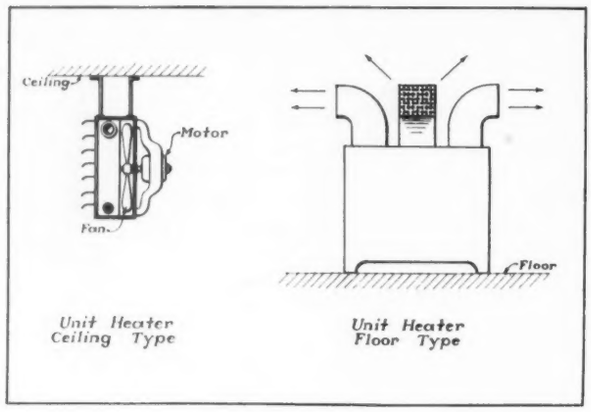

FIGURES 6 AND 7

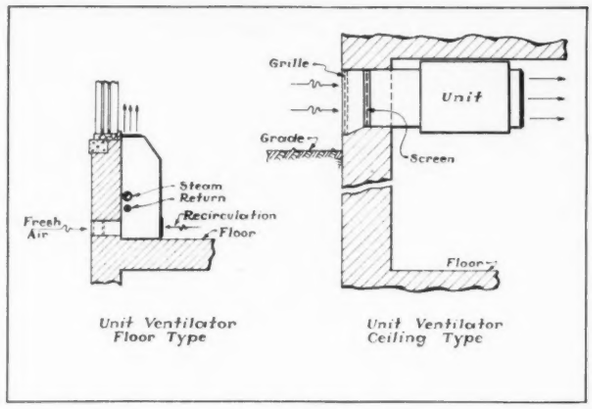

FIGURES 8 AND 9

its former exclusive territory. This is in spite of the efforts made to dress up the cast iron radiator in radiator cabinets, to conceal it back of grilles, and whatnot. Evidence of this trend lies in the advent of numerous types of cast iron convectors, usually of fin design, recently placed on the market.

Radiator Cabinets

One of the first efforts made to make the cast iron radiator inconspicuous, and as little objectionable as possible, consisted of placing such radiators in recesses with one or more grilles on the face or in the sill above. This, however, was often a very expensive solution owing to the cost of providing the recesses, lining and insulating them, and later supplying grilles to cover the inlets and outlets to the concealed radiation. The placing of radiator cabinets on the market, built of furniture steel, with enamel finish and grilles of various designs and styles (see Figure 4) did much to enhance the architectural appearance of the tubular radiator. The fact remained that such radiators, although greatly improved in appearance, still occupied floor space and often proved to be located in undesirable places when the furniture came to be placed in the room later. In spite of this, cabinets still are greatly in favor for certain classes of work, especially when convectors are installed.

Convectors

A convector is what formerly was termed an indirect radiator. Inasmuch as the major portion of the heat from such surfaces finds its way into the room via the convection air currents set up across the heater surface and little, if any, radiant heat is given off, it is felt that the term *convector* is more correct and descriptive and this type of surface now is officially so termed. The general construction is that of a central core, in which steam is contained, to which is attached extended surface of the "fin" type, the material usually being of copper although aluminum, brass, cast iron, and other metals are employed in some instances (Figure 5). The convector is placed either in a cabinet or a recess, and has the air enter below, pass up through the extended surface—where it picks up the heat—and issue forth either through a vertical grille above the convector or through a horizontal grille placed in the cabinet top or window sill above.

The question may come up as to why the convector does not cost just as much to recess as the cast iron radiator. To this inquiry, answer may be made that the convector is a much more concentrated type of heating surface, occupying in many cases only about 40% of the area that an equivalent cast iron radiator would, so that it is not as costly to recess with this form of heating surface. At the present time non-ferrous radiation is so low in price that it is closely competing with cast iron even when the cost of cabinets is included. Owing to the lesser weight involved it is claimed that copper surface heats up more quickly but it should not be forgotten that the same thing holds true when it comes to cooling off. The height of the flue above a convector will increase the amount of heat delivered and most of the convector manufacturers present tables showing the equivalent direct heating surface for various flue heights.

Unit Heaters

The unit heater is distinctly a development of the last decade and may be described in general as a concentrated bank of heating surface behind which a fan is placed to blow the air through the heater. When the fan is not running, a small amount of heat will be delivered by the heating surface although this is generally so small as not to necessitate the cutting off of the steam supply to the heater until all artificial heat can be dispensed with. Unit heaters are also constructed of the cabinet type with filters and humidifying devices and can embody a very great amount of heat capacity in a very small space. Usually the smaller designs are for mounting at the ceiling, as shown in Figure 6, but the cabinet designs are more frequently set on the floor with elbows on the top to direct the air delivery in several directions, as indicated in Figure 7. Unit heaters are much used in industrial installations, shops, and large assembly halls and gymnasiums. There also is another application very frequently made in cold vestibules where severe incoming cold draughts have to be met.

Unit Ventilators

Closely allied with the unit heater is the unit ventilator; in fact a unit heater taking its air supply from the outside may correctly be termed a *unit ventilator*. The unit ventilator, however, usually includes not only a fresh air supply but also an arrangement to bypass the air across or around the heater so that a tempered supply of air can be delivered at all times regardless of the outside air temperature and in accordance with the temperature demands of the room. Frequently air filters of the dry type are included with such ventilators and occasionally some means of humidifying the air. These ventilator units have been adopted to a very considerable extent for school work (see Figure 8) and can be obtained in standard sizes to deliver 30 cubic feet of air per minute for standard pupil-rooms in accordance with the legal requirements. For basement use these units are built in ceiling types with outside air connections and, in general, have proven exceedingly satisfactory. Figure 9 shows a typical design.

Pipe Coils

Pipe coils are no longer used to any extent outside of certain industrial projects and it is a question whether their

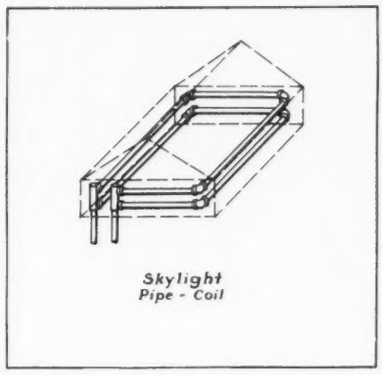

FIGURE 10

use is economically justified at all with the high cost of labor and the difficulty of erection. They still have an application in small skylights where one or two pipes can be run around the vertical walls of the skylight between the skylight glass and the sash below in the manner given in Figure 10, to prevent condensation and to take the heat loss from the glass. The vertical pipe carried up through a series of superimposed bathrooms still prevails in competition apartment house construction but is not an economical heating proposition owing to the fact that the heat emission cannot be controlled by any known method outside of a general control for the entire building, or individual manually controlled valves on each riser.

Summary

From the above it will be observed that the architect today must be acquainted with a great deal more than direct radiators and that he has not only a selection of several types of cast iron and copper surfaces but also numerous other devices having particular applications. He should, of course, know the places where such applications are unsuitable. It now has become more necessary than ever to be careful in the selection of equipment and no one type or device will fit every condition with the optimum of desirability.

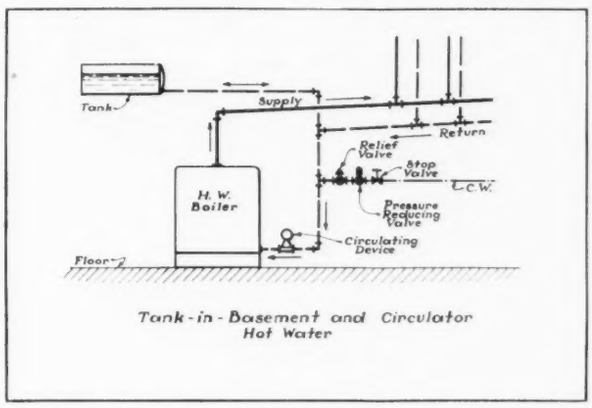

FIGURE 11

Heating Systems

Nowhere in heating is a greater diversity shown than in the new types of systems which have been developed. Up to about 1926 or 1927 there was no question on a large installation but that vacuum heating would be installed. Occasionally forced hot water was used especially in jobs covering large areas and without much height of structure. Vapor steam systems for residences and some smaller and, occasionally, moderate sized buildings had been used even prior to the war but at that time the one-pipe steam system had a great popularity which it still retains to a considerable extent largely due to the economical cost of installation. Gravity hot water systems had some very ardent advocates in some sections of the country for residence work and warm air furnaces had, and still hold, a very strong position in the central states. Now, closed hot water systems, tank-in-basement and impelled circulation with the aid of mechanical circulating devices are the rule. Vacuum systems have been radically modified. Let some of the more radical changes in heating systems now be considered.

Closed Hot Water Systems

The difficulty of placing overhead expansion tanks in positions sufficiently elevated above the top of the highest radiation, the danger of such tanks freezing during the night and boiling during the day when high water temperatures were being carried, led to an effort to use expansion tanks located in the basement in which air pressure was carried sufficient to force the water into the highest radiators. To keep such a tank filled, city water pressure is used and the compression of the air in the tank provides for the expansion of the water when heated. A relief valve insures the escape of a small amount of water if the pressures ever exceed the safe limit and a pressure reducing valve gives an automatic feed to the system so that there is no danger of going dry, nor does the system ever have to be filled up by hand except when starting up in the fall. Such is the so-called "tank-in-basement" closed hot water system frequently installed in residences where hot water heating is desired.

Forced Hot Water Systems

The use of forced hot water systems should be limited to installations where the height does not produce excessive heads in the lower portions. It is only such a type of structure which is particularly suited for this method of heating but even here there are grave objections, such as the danger of freezing, damage from leaks, and the cost of operating the circulation pumps—an item of no small magnitude. The old argument of better temperature control and greater economy in fuel consumption has lost much of its weight with the coming of better temperature control systems for steam, and steam systems of proper character can give hot water real competition when temperature control and economy are the only factors to be considered.

Circulator Hot Water Systems

The ordinary hot water system of either open tank or closed tank variety is much improved by the use of a small circulating device in the shape of an impeller installed in the circulation lines and operated by motors ranging from 1/10th to 2 horsepower according to the size of the system. These devices speed up the circulation, rapidly rotate the water and increase the boiler efficiency by means of the accelerated flow across the boiler heating surfaces. They do not require the entire water contents of the system to become heated before circulation begins but, on the contrary, circulation may be started as soon as the fire is lit and an almost equalized temperature of water is at once circulated to all parts of the

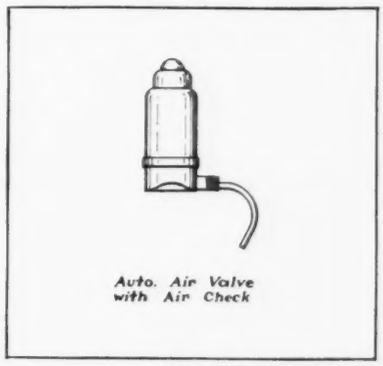

FIGURE 12

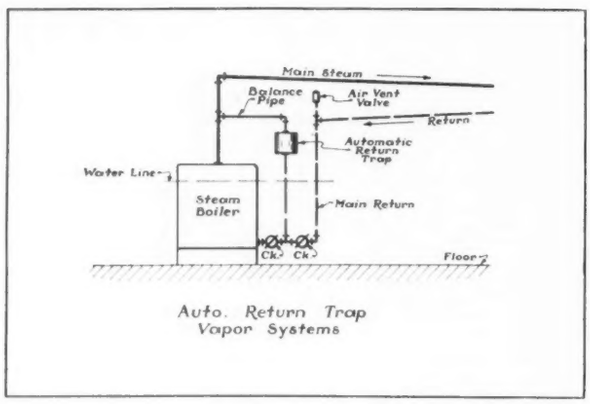

FIGURE 13

system. Slightly smaller pipe sizes are permissible and a slightly higher average radiator temperature is usually secured. The combination of a closed hot water system with an impeller or circulator added gives an installation greatly superior to the old type gravity system. A typical example of a closed system with tank-in-basement and a circulating device is indicated in Figure 11.

One-pipe Gravity Steam Systems

One-pipe steam heating has advanced but little in the past ten years; there has been a standardization of pipe sizes so that less trouble is experienced with such installations and an automatic air valve has been placed on the market with a check (see Figure 12) so that air after being expelled cannot return to the radiator. As a result, systems so equipped may be run under a partial negative pressure after the air has been initially expelled and can more nearly approximate vapor conditions than formerly. Outside of these two items there is little change from the original one-pipe steam job put in many years ago.

Two-pipe Gravity Steam Systems

The two-pipe steam system of gravity type is practically obsolete and no longer is used to any extent. There are many old systems still operating by this method but they are gradually being revamped into some other more satisfactory scheme of operation such as changing them over to vapor, vacuum, or some other more up-to-date method. The same may be said for air line systems. The inconvenience of operating two radiator valves in order to turn the radiator on and off combined with the difficulties experienced with circulation and the back-firing of the steam through the return connections had much to do with the passing of the two-pipe gravity steam design of piping.

Two-pipe Vapor Steam

Vapor heating still remains a very satisfactory method of heating residences and moderate sized buildings where something better than the one-pipe steam system is desired and yet where the operating cost can ill afford to carry the electric charge for running a vacuum pump. The primary idea back of vapor design is to expel the air from the system by initially raising a steam pressure until this is accomplished and then to prevent the return of the air when the fire goes down and steam is not produced as fast as it is being condensed. As a result of the reduced amount of steam formed and a continued condensation in the system, a self-induced vacuum—or, rather, a partial vacuum—is formed in the system and the steam expands under this partial vacuum with a corresponding reduction in temperature. The boiler fire will continue to produce steam—or vapor—under this partial vacuum with less fire than would be required if no vacuum existed on the system and with a corresponding reduction in fuel consumption.

Graduated valves are almost invariably used on such systems and an automatic-return-trap, as shown in Figure 13, should always be installed to prevent an excess, or unusual, steam pressure driving the water out of the boiler due to the return being open to the atmosphere. One of the beauties of this type of heating is the facility with which temperature control of almost any character can be applied without difficulty. Some types of vapor heating do not operate at an actual vacuum but, instead, operate at a pressure one or two ounces above the atmosphere; while such systems are not *strictly* vapor systems, they are so designated by trade practice and are generally included in the broad sense of the term "vapor heating." There also is a one-pipe system of vapor heating on the market which has won considerable success. This system employs a special plug cock type of valve on the radiator inlet and a special type of air valve on the opposite end of the radiator.

Two-pipe Vacuum Return Line System

In buildings where the luxury of a vacuum pump can be afforded, and in practically all work of large character, the vacuum system—either in its original form or combined with various other improvements which later will be discussed—forms the backbone of nearly every heating design. Occasionally forced hot water will be used especially if the structure is low in height and, recently, hot water with forced circulation was installed in a building of considerable height. This must be regarded as an exceptional job, however, and not by any means forming a general practice. In the two-pipe vacuum system, steam is delivered to the radiators through a system of steam mains at any pressure desired—usually about 2 lbs., gauge—and penetrates the radiator as far as the thermostatic trap on the return end. On the other side of the trap in the return pipe system the vacuum pump constantly maintains a vacuum fluctuating around 10 inches and discharges the air (coming back in the return line) to the atmosphere while the condensation is delivered to a feed-water-heater, or directly into the boiler, if the boiler is one operating under low pressure. Many persons do not understand that in a vacuum system there is no vacuum on the steam line nor in the radiators; the vacuum is actually confined to the return line so long as there is steam in the radiators and on the system.

This system possesses the faculty of being particularly suited for the application of the various temperature control devices and may be installed with graduated valves

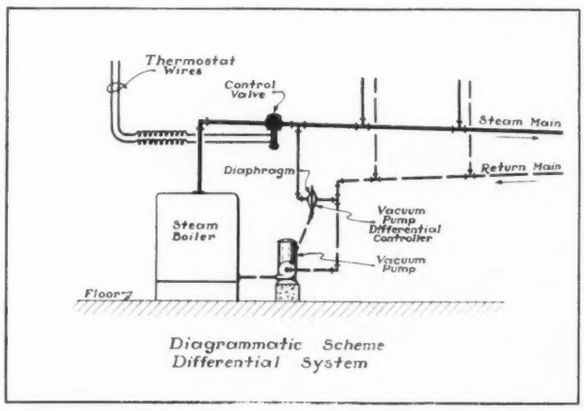

FIGURE 14

on the radiator supplies for manual control if so desired. In high buildings no excessive pressure is generated in the lower piping and with an overhead-down-feed arrangement, the return pipe sizes on the lower floors are kept down to the minimum.

Fixed Differential Systems

Although vacuum systems became more a standard method of heating than perhaps any other type of steam system and held an enviable position over a long period of time, in 1926 an improved type of vacuum system known as the fixed-differential system was placed on the market as a result of several years of experiment and investigation. This system immediately proved a success and has been adopted in an increasing number of buildings each year, involving as it does not only heating but temperature control as well. No attempt will be made here to go into the technical details of the system but every architect should be familiar with the basic principles under which it operates.

In this system the vacuum *does* penetrate through the radiators and into the steam line due to a control valve placed on the general steam supply line which valve cuts down the steam supply in accordance with the demands of the temperature in the building which, of course, are largely governed by the outside weather conditions. The vacuum pump is a special pump with a controller so arranged that whatever the vacuum on the steam line, the pump will carry approximately 2″ higher vacuum on the return (see Figure 14). As a result, there always is a lower pressure in the return than in the steam and this is the "fixed differential" on which the system operates. In very cold weather the system is run as a straight vacuum system but, as the temperatures outside rise, the control valve on the steam line gradually shuts down, thus supplying an inadequate amount of steam to fill the system. The condensation of the steam in the system, however, gives rise to a self-induced vacuum—the same as previously described as occurring in the true vapor systems—and partial vacuums are produced which may go as high as 26 inches, if the weather becomes sufficiently mild. Special traps are used to function under such vacuums and the vacuum pump is so designed that it will continue to operate no matter what vacuum is being carried in the system. The radiator valves are equipped with orifices to aid in the proper distribution of the steam.

The result of this is to reduce the steam temperature from approximately 220° F. at 2 lbs., gauge, down to about 125° F. at the highest point the vacuum reaches. Now, the heat emission from a steam radiator is approximately proportional to the temperature difference between the steam in the radiator and the air in the room so that, on the coldest days, there is a difference of 220° F. less 70° F. or 150° F. while, on the mildest days, the difference will be only 125° F. less 70° F. or 55° F. which indicates that the heat emission based on temperature difference alone would drop to about 36% of maximum. But, besides this, the enormous expansion of the steam under high vacuum produces velocities through the radiator orifices which help to throttle the radiators so that the control is carried down far below the 36% line. Thus, practically all the temperature control on the building as a whole may be secured by means of the main control valve which may be either manually or thermostatically controlled.

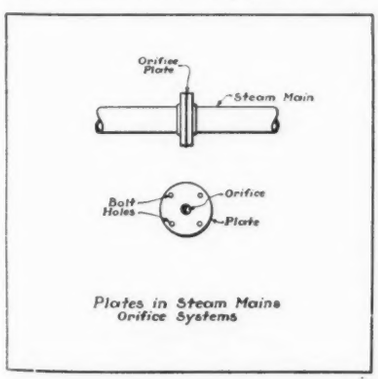

FIGURE 15

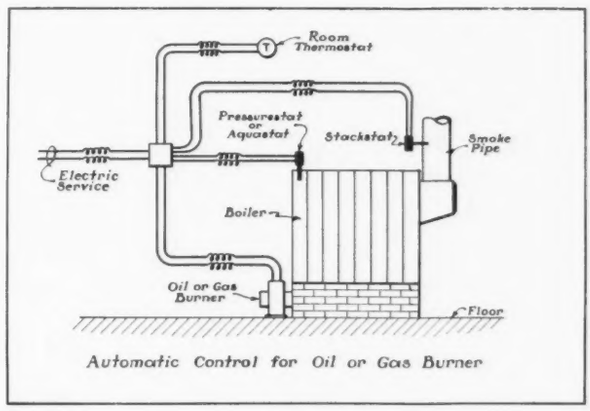

FIGURE 16

The two great advantages of this system lie in the additional comfort secured and the fuel savings resultant from never having the building overheated. Tests conducted on the same building (with the same occupancy and with the same heating system simply run as straight vacuum operation as against differential operation) show by test to range from 25% to 40%. The initial cost is considerably less than a straight vacuum system with sufficient thermostatic control to secure the same economy and the simplicity is very manifest.

Orifice Systems

Shortly after the fixed differential system was placed on the market orifice systems were designed in an effort to duplicate the results obtained with fixed differential. Some of these systems use radiator traps and some do not; some require a vacuum pump and others dispense with the pump altogether. The basic principle on which they are designed is that the steam flow through an orifice will go up to a certain velocity and then will not increase materially beyond this velocity. If the outlet pressure on an orifice is 58% or over of the inlet pressure, the flow through the orifice will be less than the maximum, graduating down to zero when the two pressures are equal. On the other hand, if the outlet pressure on the orifice is less than 58% of the inlet pressure, the velocity through the orifice will not be materially increased even though the outlet pressure falls as low as 1%. Therefore any pressure in the radiator which does not exceed 58% of the inlet pressure will give a constant—or practically constant—velocity through the orifice. Orifices are installed on the mains in some instances as shown in Figure 15.

As the volume of steam changes with the pressure, it follows that almost any quantity of steam can be delivered through a given orifice by simply changing the inlet pressure. This is what is done in the orifice systems, a high pressure being used when cold weather is attained and the orifice made of just sufficient size to allow the radiator to receive its full quota of steam at the highest pressure to be used. As soon as this pressure is dropped, the velocity remains unchanged but, owing to the greater volume of steam to be passed at the lower pressure, the weight of steam delivered is less and the radiator is partially starved, giving off only a portion of its full amount of heat.

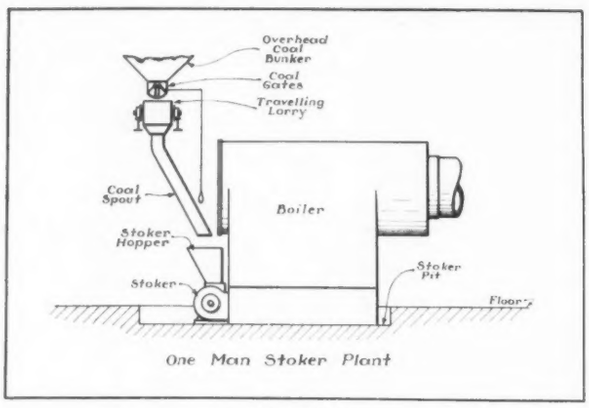

FIGURE 17

One of the most successful of these systems employs a special control with a thermostat on the roof and another in the building so that the pressure is governed by a mixed action of the two thermostats. This system is not recommended for systems under 10,000 sq. ft. of surface and is somewhat more costly than fixed differential. It has not yet been installed in a sufficient number of varying types of buildings to state with any positiveness just what may be expected from it, although it seems that it may have some very good possibilities.

Temperature Controls

In no branch of heating has there been greater progress than in the various automatic temperature and safety controls which have been developed within recent years. The well known systems of pneumatic control are still as strong as ever but a host of new controls, particularly of the electric type, have been developed. These started with the old electric control operating a motor to open and close the draughts on a coal fired boiler (sometimes with a clock for opening up in the morning) and have progressed to a point where almost anything that can be done pneumatically can also be done electrically. Oil and gas fired boilers gave a great impetus to the electric control business and aquastats, pressurestats, thermostats, stackstats, and motor-operated-valves have resulted. A typical automatic control installation for oil or gas fired boilers is given in Figure 16.

Temperature control may be divided into two general classifications these being "general controls" and "individual controls." By general controls is meant controls handling the building, or section of a building, as a whole and by individual controls is meant those handling the single unit, or radiator. There are many designs, for example, of the self-contained thermostatic radiator control valve which is attached to the radiator in place of the ordinary hand valve and, when so attached, automatically maintains the room temperature for which it is set. Then there are the general controls which operate the building as a unit, usually from the boiler, or else control the building in sections, such as occurs with motorized-valves placed on certain mains feeding the sections to be controlled.

Among the controls with which the architect most frequently will come into contact might be mentioned:

a. The room thermostat, controlling the temperature of the room or house by the temperature of the air surrounding the thermostat.
b. The aquastat, used on hot water boilers to prevent the water temperature going above the safe limit.
c. The pressurestat, used on steam boilers to prevent the pressure going above the safe limit.
d. The stackstat, which is used in the smokepipe of oil fired boilers and which turns off the burner oil if the stack does not heat up within a given time after the ignition is supposed to have taken place.
e. The motorized valve, which opens and closes in response to the electric impulses from the thermostat.
f. The potentiometer, which is an electric graduated thermostat controlling a motor in steps from full open to full closed.

These are only a few of the most common and the designs and types are legion. Each manufacturer has his own mechanisms and devices which he applies to the different cases and the best method is to hand the problem to him direct and let him work out what he would recommend.

Then there are the heating systems which have automatic control incorporated as an integral part of the system such as the fixed differential and orifice systems. Many steam jobs utilize what is commonly termed the "on-and-off" control where a clock actuated mechanism turns the steam on the building for greater periods with a shorter time of cut-off in colder weather and on for shorter periods with a longer time of cut-off in milder weather.

Controls for unit heaters usually consist simply of a thermostat of some character which stops the motor when the surrounding atmosphere has reached the desired temperature; the heat emitted by the heater when fan is not running normally is not sufficient to overheat the space in which the heater is located until outside conditions become warm enough to permit the closing off of the steam supply entirely which, of course, automatically shuts down the radiator.

Conditions occasionally arise where the heaters are located in basements where, at times, considerable heat may be generated in certain sections yet where it would be impossible to shut off the steam supply to the other portions, thus making it desirable to be able to shut down the radiators, as well as the fans, in the overheated sections. Under such conditions a duplicate control is provided for the heater, one portion of which first shuts down the fan and the other portion of which later closes off the steam supply to the heater if the temperature in the room continues to increase.

On unit ventilators for schoolhouse work the control must be arranged to suit the type of ventilator used; for example these units may be equipped either with a mixing damper, which bypasses the air across the heating surface in accordance with the demands of the room temperature, or the mixing damper may be omitted and the heater di-

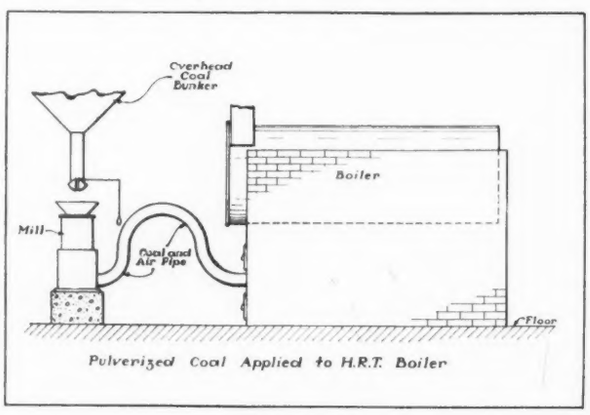

FIGURE 18

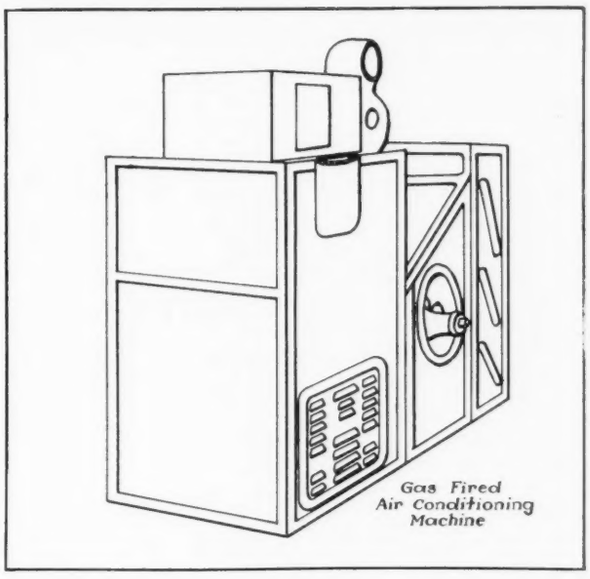

FIGURE 19

vided into two sections one set above the other. The lower section acts as a tempering coil and delivers air to the classroom at a temperature never less than 60° F. while the second section comes into service and heats the air to a higher temperature when the temperature in the classroom is below the desired point. Recirculation should be provided for in both types of ventilator on the basis of economy in heating up, although many school buildings are equipped both with ventilators and with radiators which are entirely independent. The function of the direct radiators in these cases is to bring the room up to temperature and to hold it there, either with or without occupancy. The function of the unit is to ventilate the room only when it is occupied. The fact remains, however, that even with this arrangement, the room can be heated up more quickly on Monday mornings, and mornings after holidays, if the ventilating units are equipped with recirculation dampers.

Now as to the matter of control; the units with bypass dampers are generally controlled by two thermostats, or by one thermostat with the so-called "step-action." With the two thermostats, one thermostat controls the bypass, or mixing, damper so as to throw on entirely cold air as the temperature in the room rises; the second thermostat cuts off the heater in the unit if the temperature continues to rise above the point where the damper is supplying entirely unheated air. With the single "step-action" control, one thermostat first throws the damper to entirely cold air and later cuts off the heater. With the two-part heater rig the first heater is in service at all times unless the room temperature goes above normal and the second heater comes into play only when the room temperature is below normal. Either two thermostats or the "step-action" thermostat may be used for this control. The recirculation dampers are best arranged with a manual control in the boiler or engineer's room so that all units can be thrown onto recirculation before class time in the morning and each unit then may be started up by throwing in the electric switches controlling the circuits on which the unit motors are placed. Later, at 9:00 A. M., the recirculation dampers can all be thrown over to fresh air by the custodian, or janitor, with the assurance that no heat has been wasted in ventilating empty rooms.

The addition of one or more direct radiators in conjunction with the ventilating units adds somewhat to the complication of the automatic control but is most easily provided for by putting the direct radiators on a control that will open them whenever the temperature in the room falls to 65° F. and closes them whenever the temperature rises to 67° F. so that the radiator comes in and boosts the temperature whenever the unit alone can not keep the room up to the proper degree. The exact degree at which the thermostats are set is developed on each installation to meet the ideas of the parties concerned, but the general principle—that the unit takes all the heating and ventilating load up to the limit of its capacity and that the direct radiator comes in only when the unit is unable to maintain temperature desired—is seldom deviated from. Such combination arrangements result in a considerable economy in electric power owing to it not being necessary to operate the units when only heat is required which, of course, covers all times when the room is unoccupied.

Summary

Thus it will be seen that, as far as heating systems are concerned, the greatest advance in the one-pipe steam system is the checked automatic air valve, in hot water heating the closed system and the mechanical circulator, in vapor heating the automatic return trap, in vacuum heating the fixed differential, in automatic control the electric systems for purely separate controls and the fixed differential system for combined control and heating. There may be some who would attribute certain other items as deserving prominence as, perhaps, they do, but the above covers the outstanding and principal high spots as seen from the designer's standpoint.

Heat Production

In the production of heat, radical innovations have come to stay; oil fired and gas fired boilers, stoker boilers for domestic use, and street steam, are probably the most important. There are two distinct reasons why the changes in heat production have been brought forth; one is economy and the other is convenience and cleanliness. For example, there is a widespread effort to get away from large size anthracite coal simply on account of the high cost of this fuel. Substitutes of smaller sizes, or of bituminous coal, usually are adopted. Then there is the individual generally well-to-do, or fairly so, who doesn't want to mess around with coal and ashes or who objects to his wife having to stoke a fire while he is away during the day or on long trips. Such people usually go to oil or —sometimes—gas. While there is considerable variation in different localities, it may be roughly considered that in the ordinary case oil compares economically with coal when coal is about $9.00 to $10.00 per ton. So it will be evident that a stoker with small coal will be able to turn out a yearly fuel bill somewhat less than with oil but an ordinary grate with large anthracite coal is likely to have an annual fuel bill in excess of oil. Gas —unless it is natural gas—always has a high rate compared to the heat delivered and the owner should secure careful

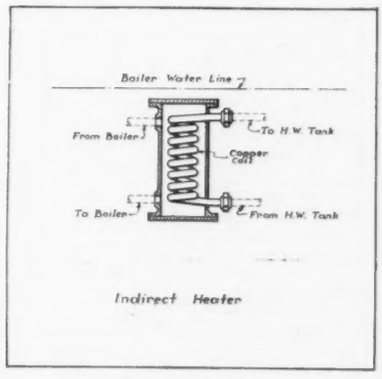

FIGURE 20

estimates as to the probable annual gas bill before committing himself.

Street Steam

The ordinary large building today, in districts where street steam is available, almost without exception utilizes this service. When this is done the cost of a boiler room and chimney is eliminated, the floor space which would be occupied by the chimney can be rented and produce an income, while the boiler room space often very conveniently can be utilized for storage or even may not be excavated at all. The nervousness about building a large skyscraper without a chimney has largely disappeared and it is interesting to note that the United States Government recently contracted for all the Federal buildings in New York City to use street steam service.

In this type of heat production exists the paradox of there not being any heat produced. The company brings in a main delivering steam somewhere around 100 lbs. pressure and the owner simply connects onto the end of this main beyond the meters and carries the piping from this point on through the building. The returns are pumped through a cooling coil or heat exchanger of some sort and delivered to the sewer at less than 100° F. In case the owner has any use for this water it is all his to use but in most instances it simply is allowed to run to waste. The advantages of this means of heat supply are many; all coal, oil, dust, noise, and smoke are immediately eliminated; the owner has no responsibility in operating a plant; there is no plant depreciation to be charged up against the building; and so on. Oh, yes, it costs a little more than to generate your own steam even when all the items of the building steam plant are considered, but the convenience is felt by many to be well worth the price.

Coal Fired Plants

The coal fired plant still is king in economy, smoke has been eliminated, and mechanical coal and ash handling reduce the labor down to a level where further reduction becomes impossible. The coal-burning plant as designed today is frequently made as so-called "one-man" plant. That is to say the whole plant can be operated by one man with less labor than four or five men would have had to produce in the old days. This is accomplished by storing the coal in overhead bunkers from which it is delivered by gravity to the furnace and the fireman never does more than to pull a lever. This is indicated in the arrangement shown in Figure 17. The raising of the coal to the bunker and the delivery to the various parts of the bunker are accomplished either by a bucket conveyor and belt or by a skip hoist.

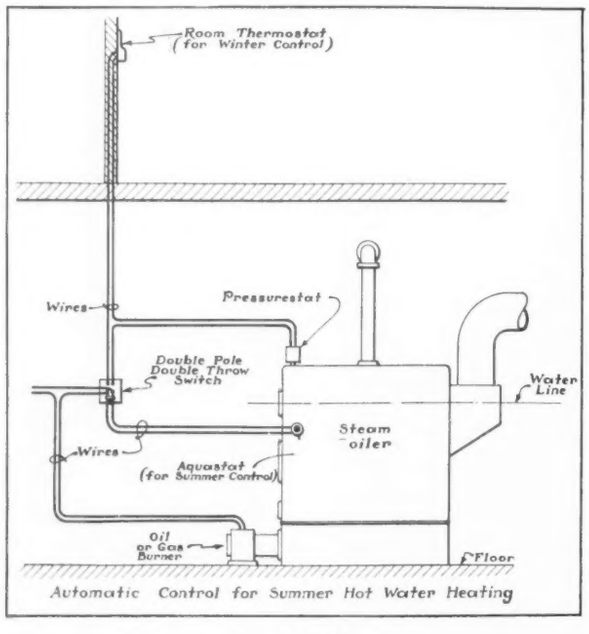

FIGURE 21

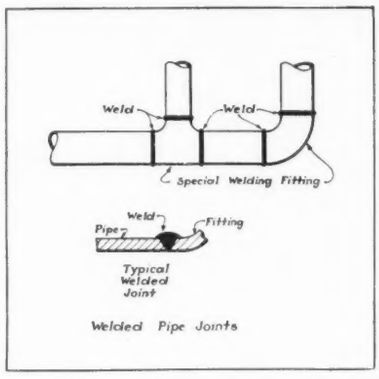

FIGURE 22

Ashes are removed by means of a scraper and elevator or some kind of steam jet ash conveyor. Sometimes the ash is raked out into a small ash car which runs down a short length of industrial track and dumps into the conveyor or skip hoist. No longer is the coal-fired plant a back-breaking, heart-breaking, filthy, dusty job. And this brings up the question of stokers.

Stokers

Stokers have been in use in large power and steam plants for a great many years but it is only within the past six or seven years that they have begun to be built for smaller size jobs and even for domestic service. They may be roughly grouped into underfeed, overfeed, and chain grate types. They may be steam or electric operated although most of the smaller sizes are electric driven. The underfeed stoker can burn almost any material that is combustible and pushes the material in at the bottom with the fire on the top burning downward. The ashes are frequently spilled from dumping grates, located on each side, into a pit from which they are removed by hand or in one of the ways previously described. Most stokers employ fans for forced draft.

The overfeed stoker delivers the fuel on the top of the fire, gradually pushing toward the rear as it is consumed; the chain grate carries the fuel into the furnace supported on a link mesh gradually moving toward the rear so that, by the time the fuel has burned out and turned to ash, it is dropped off of the end of the stoker. The chain grate is used almost exclusively for anthracite coal and is somewhat more expensive in first cost than some of the others. The stokers can be provided with automatic controls which are actuated by the steam pressure and speed up or slow down in accordance with the rise and fall of the pressure within very narrow limits.

The small domestic stoker is equipped with an abnormally large hopper so that it can be filled up to last for a considerable length of time and, after this is once done, the stoker will automatically function until the supply of fuel is exhausted. So it will be seen that stokers too have gone to college and obtained a diploma for convenience and economy.

Pulverized Coal

Stokers at present are suffering from a rather keen competition offered by powdered coal installations. Formerly the pulverized fuel plant was a very expensive article and, just on account of the first cost, was limited to use by large utility companies and similar installations. With the advent of the single mill per boiler the pulverized fuel people began making installations as low as 150

horsepower and applying this method of firing even to existing boilers which had previously been using hand fired grates or some other method. The procedure is to construct a mill (or grinder) and blower of sufficient capacity to operate the boiler at the rating desired and to connect this mill with the boiler where a burner is located in the furnace. Coal is fed into the mill from an overhead bunker by gravity. Thus there is no storage of pulverized fuel, no danger of explosion, and about 5% greater efficiency can be had from the boiler. The first cost is likely to exceed that of stokers to a small degree. See the typical installation shown in Figure 18 for a horizontal return tubular boiler.

Oil Burners

Oil burners are distinctly a product of the last ten years and originally were put on the market without sufficient experimental work and with inadequate safety and control devices. The burners were soon improved, however, and the control people solved the other item in such a manner that oil burners today may be considered as quite safe and entirely satisfactory. They require only about 2/3 of the chimney area necessary for coal. They should be capable of burning as heavy an oil as consistent with the burner characteristics, on the ground that the light oils are more expensive for the Btu contained than the heavier grades, and should be full automatic; that is, pressure, ignition, oil valves, and burner should all function without human agency. The stackstat is an important item which should never be omitted.

The ordinary residence can be supplied for a very moderate price with an oil burner installation complete, including tank, applied to an existing boiler. All boilers, however, are not suitable for oil burners of all types, the general characteristic desirable being a long flue travel such as is offered by the ordinary steel firebox boiler. A reasonably sized storage tank with a proper indicator of the contents is a necessity for a proper oil burner job. If too small a storage tank is used, frequent refillings will be necessary and it has been found that the ordinary residence uses about 3 gallons of oil per season per square foot of steam radiation installed. This would work out a little over 3/5 as much per square foot of hot water radiation and from this some idea of the number of fillings per season can be obtained if the approximate amount of heating surface is known.

Steel Residence Boilers

The oil burner has been largely responsible for the development of the steel house-heating boiler. These boilers are of the firebox type and may be secured in sizes to suit the ordinary residence but hardly small enough for a bungalow. They have the advantage of a comparatively long flue travel, no cracked sections, and will fit in long narrow spaces where the ordinary cast iron boiler would be severely crowded. Boilers with copper tubes also are on the market with the claim of high efficiency, no corrosion, and smaller tubes. They are especially suitable for either oil or gas but usually are slightly more expensive than the steel boiler of equal capacity.

Gas Heating

Heating with gas is becoming quite common in some localities; it is recommended that houses be insulated by some means when this type of heat is employed. Boilers should be of high efficiency and specially constructed for gas use. The vent should not be connected direct to the chimney but must have an interceptor to break the draft as gas fired boilers do not require any draft at all. They are excellent where a proper height of chimney cannot be obtained. The ordinary residence can be equipped with a gas fired boiler at a cost ranging from $300 to $600 as there is no tank and very little control to be supplied. Usually a pressurestat in the case of steam, or an aquastat in the case of water, connected to a solenoid valve in the gas line is all that is required, although room thermostatic control can be added to this if desired.

Manufactured weather by means of a special apparatus which cleans, heats, and humidifies the air passing through the equipment is another innovation of comparative recent vintage, this device delivering the treated air into the rooms by means of a fan and recirculating a portion of the air from the house (see Figure 19). It is gas fired and is supposed to be very, very close to an ideal method of heating and air conditioning. Of course no cooling is involved but this can be added by installing a refrigeration machine and arranging to cool the air instead of heating it.

Gas heating is expensive—especially in localities where manufactured gas at the ordinary rates is encountered. Where natural gas is available, however, it will compete favorably with coal. This is the reason that house insulation is almost obligatory in such cases in order to reduce the heat demand as much as possible. There are many types of insulation on the market, some of which may be applied dry and others of which are applied wet. In existing structures only dry or flake insulation is practical, this being introduced between the sheathing and the lath and plaster by opening strips along the ceiling and pouring the spaces full. Similar insulation is introduced between the attic floor joists by removing attic floor boards at frequent intervals if any attic floor exists. Of course in new construction any good insulating method may be used—cork, zigzag felt and many others. Cellular concrete also has high heat resistance.

The Indirect Heater

An entirely new method of heating hot water from the main steam boiler has been made possible by the development of the indirect type of heater. This consists essentially of a shell, inside of which is placed a spiral copper coil, the shell being connected to the boiler with supply and return pipes and the coil being connected to the hot water storage tank with the usual circulation connections as shown in Figure 20. The result of this arrangement is that there is an exchange of heat between the boiler water and the water within the coil whereby the coil water is heated and flows up into the storage tank. These indirect heaters have the distinct advantage of never boiling the water in the water storage tank and their capacity does not fluctuate with the intenseness of the boiler fire as is likely to occur with a coil in the fire box. Incidentally they have made practical the securing of a summer supply of hot water from the main boiler without the use of another heating apparatus when the main heating system is closed down.

Summer Hot Water

For example, in the case of an oil fired steam boiler one or more indirect heaters are placed on the side of the boiler and connected up to the storage tank in the usual manner with the ordinary automatic controls on the boiler for winter use. In addition, an aquastat is installed set at about 160° F. and a switch to throw off the winter control and to throw on the aquastat is provided as illustrated in Figure 21. During the winter the operation of the burner is as usual and hot water is supplied through the medium of the indirect heaters. As soon as warm weather arrives the switch is thrown and the boiler goes on to the aquastat control which opens up the oil burner

whenever the boiler water temperature reaches 160° F.

Of course the heater does not generate quite the same amount of hot water with 160° F. in the boiler as it will during the winter with 212° F. to 220° F. but it must be remembered that the water to be heated in summer does not come in at such a low temperature as in winter—which largely compensates for the difference. Another method is so to arrange the controls that the aquastat will automatically take control of the boiler whenever the boiler water reaches 160° F. or thereabouts and to leave the room thermostat and boiler pressurestat on all the time. Then, in a sudden cold snap the boiler automatically makes steam without manual resetting of the controls.

Pipe Materials

The materials used for piping in heating systems have undergone but little change outside of the matter of copper. Considerable residence work is now being done with copper tubing made up with special fittings, either sweated to the tube, or with the tube flanged over so as to form a sort of union joint somewhat similar in idea to the Van Stone joint. Copper bearing steel pipe also is being used on some quite important work with the idea of securing greater resistance to corrosion. This is simply steel pipe containing not less than 2/10ths of 1% and not over 35/100ths of 1% of copper.

In some cases, on the monumental type of building, advantage is being taken of the low price of copper to use red brass pipe (83% copper) on all returns from the radiator outlet to a point where the return line becomes exposed and accessible for replacement where copper bearing steel or wrought iron pipe is substituted. This is felt to give the maximum assurance against corrosion troubles in concealed locations and usually, when the return reaches an exposed position, it is a somewhat larger size of pipe with a correspondingly heavier shell so that corrosion is less likely to become serious in a comparatively short time.

Welding

Welding has stepped into the picture with a vengeance during the past few years. Nearly all of the low pressure steel heating boilers are electro-welded in the shop and some are acetylene welded right on the job when necessary. The results have been very satisfactory. It is difficult to say as much for acetylene welding on pipe in the field; expert welders are scarce and the supply is limited; certain joints are very difficult to make by means of welding. The government, on Federal buildings, is permitting welding down as far as 2½ inch size of pipe but only time will prove whether the weld will last as long as the pipe, even though it may be stronger than the pipe when made. Special welding fittings should be used when welding is permitted and several manufacturers now produce a line of fittings particularly designed for this purpose (see Figure 22). The principal things to look out for on a welding job are defective work by incompetent welders, icicles inside the joint, and misaligning of the straight pipe due to contraction of the last portion of the circumference to be welded, all of which can be guarded against by proper supervision. In spite of these hazards, welding is making great strides and some saving in cost is claimed for work made up in this manner.

THE FIRST SAVINGS BANK IN THE WORLD—DUMFRIESHIRE, SCOTLAND

LITHOGRAPH BY THEODORE DE POSTELS FOR THE SAVINGS BANK ASSOCIATION, NEW YORK

Comparative Details—Group 3
Radiator Enclosures

Prepared for Pencil Points by Courtesy of the New York Architects' Emergency Unemployment Committee

Drawings by Paul F. Zeidler from Data Supplied by the Architects

THE ARCHITECTS whose details are shown on this and the succeeding pages are as follows:

RICHARD H. DANA, JR.
BRADLEY DELEHANTY
AYMAR EMBURY, II
FRANK J. FORSTER and R. A. GALLIMORE
GODWIN, THOMPSON, and PATTERSON
BERNHARDT E. MULLER
GREVILLE RICKARD
ROBERT PERRY RODGERS

DETAILS PREVIOUSLY PUBLISHED

Dormers . . October, 1932
Fences and Gates November, 1932

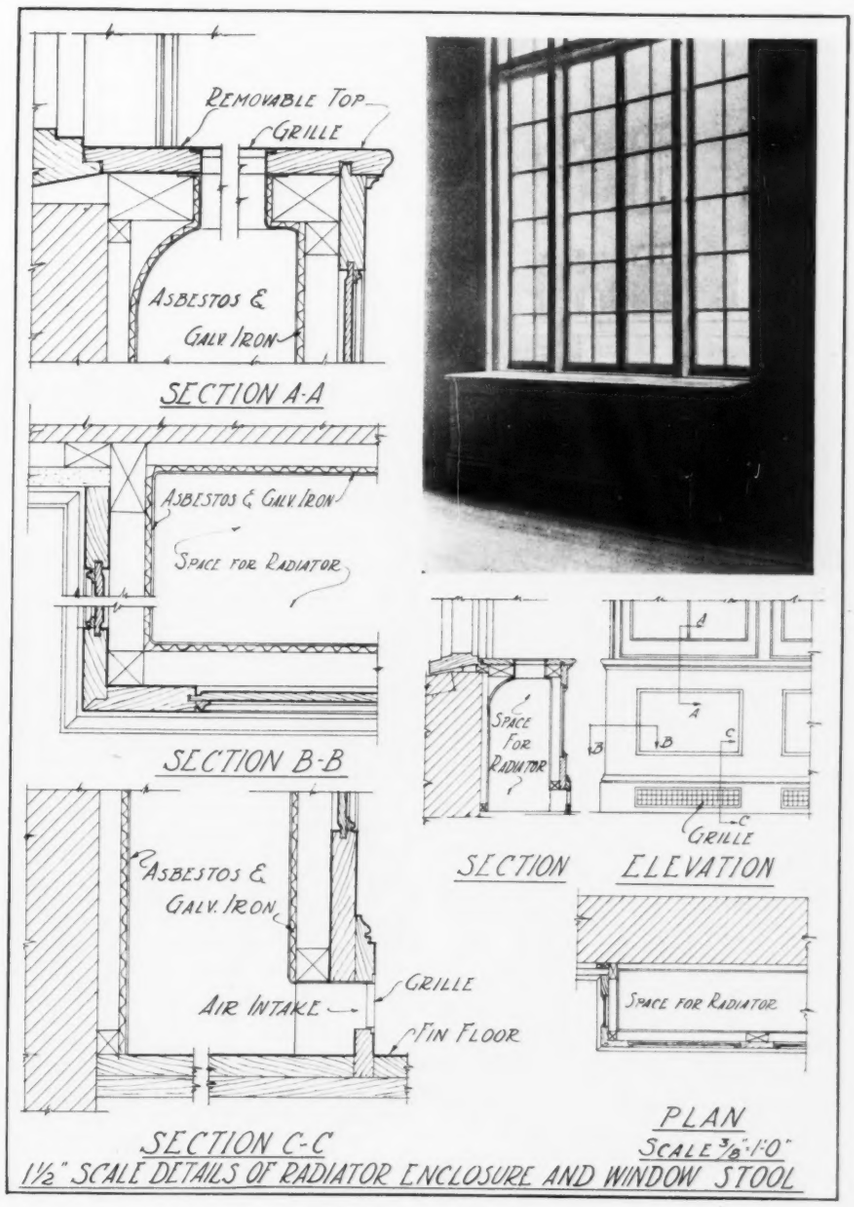

APARTMENT OF ROBERT PERRY RODGERS
Robert Perry Rodgers, Architect

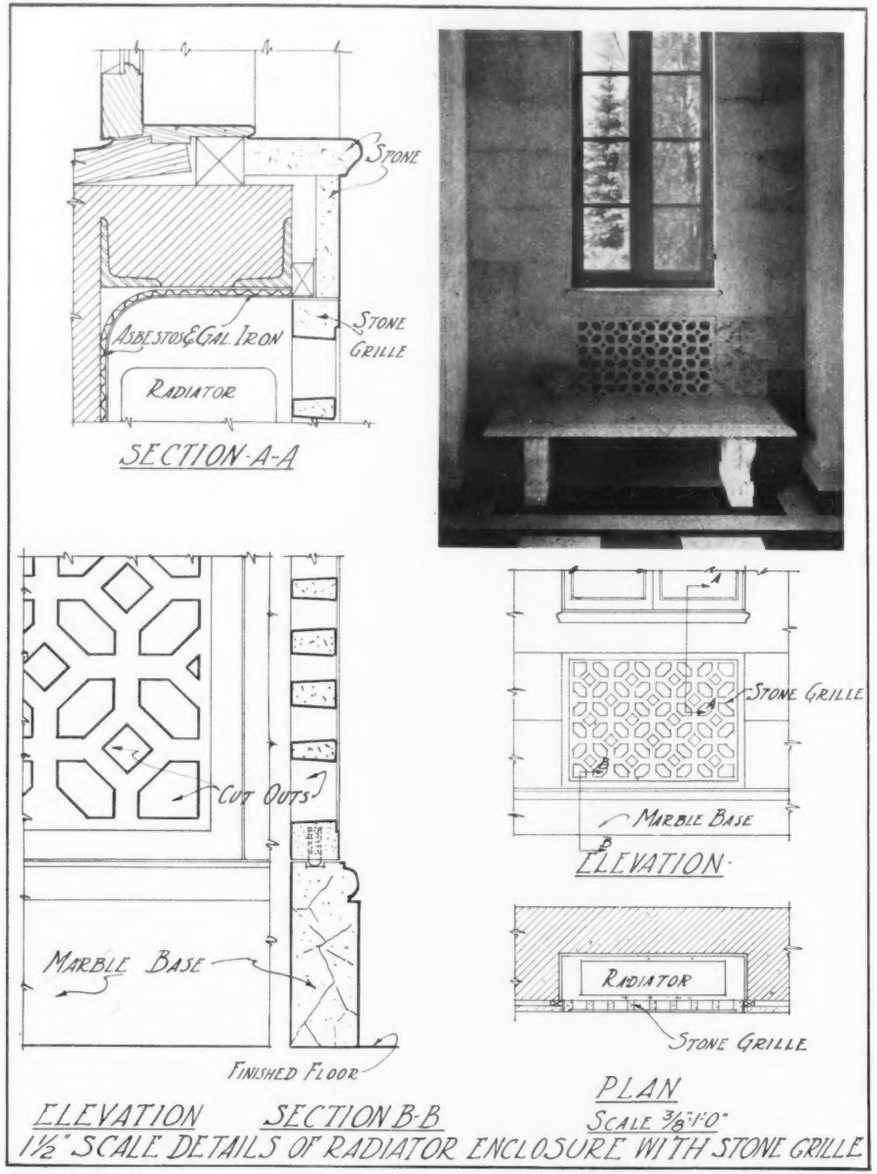

Photo by Gottscho

RESIDENCE OF W. S. BARSTOW, ESQ., GREAT NECK, LONG ISLAND, N. Y.

Greville Rickard, Architect

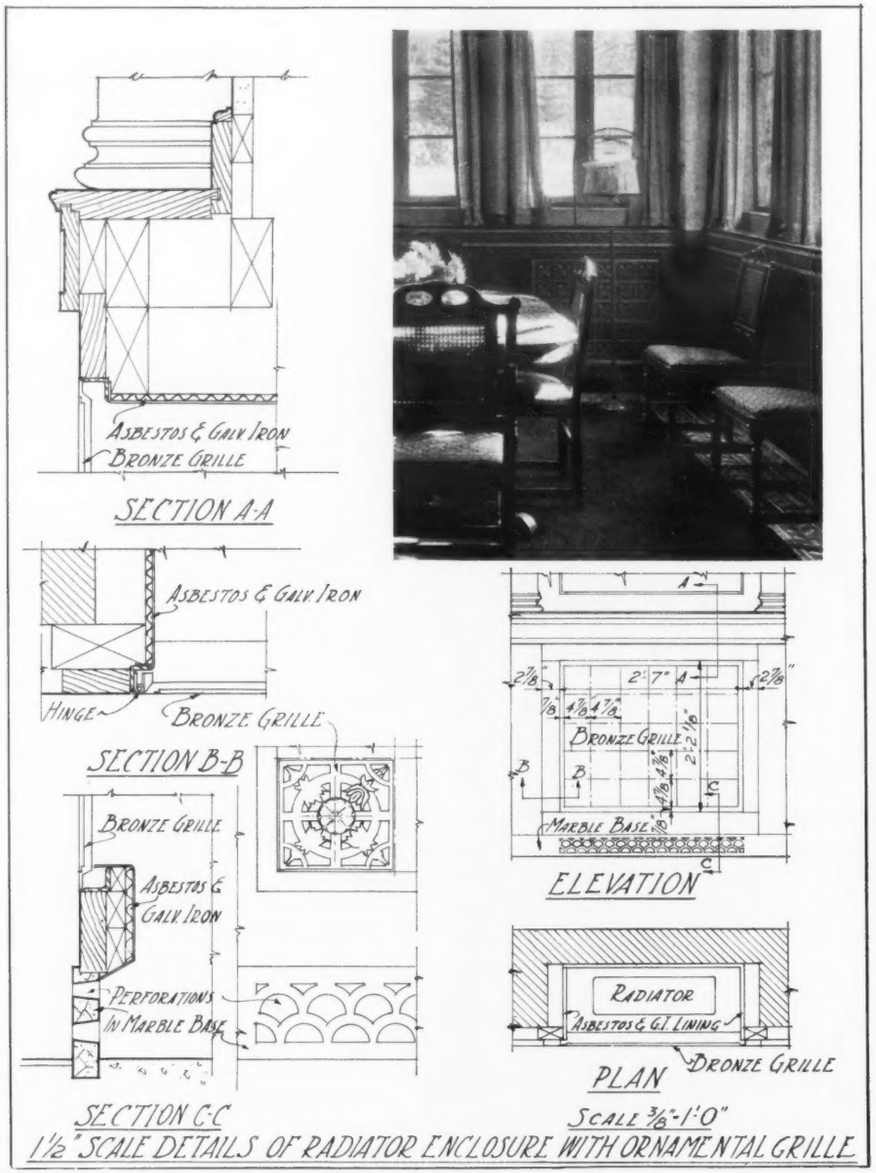

Photo by Gottscho

RESIDENCE OF W. S. BARSTOW, ESQ., GREAT NECK, LONG ISLAND, N. Y.

Greville Rickard, Architect

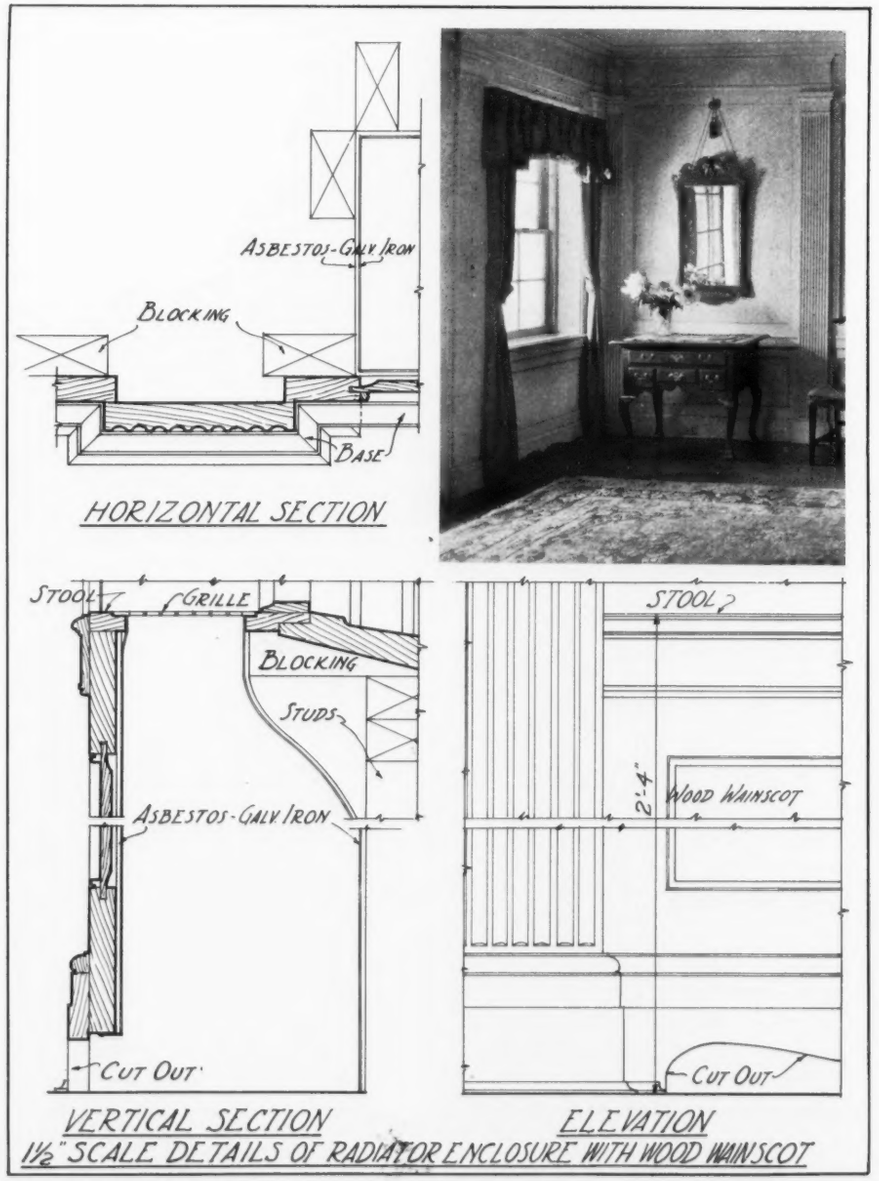

Photo by Richard Averill Smith

RESIDENCE OF C. H. DAVISON, ESQ., PRINCETON, NEW JERSEY

Aymar Embury, II, Architect

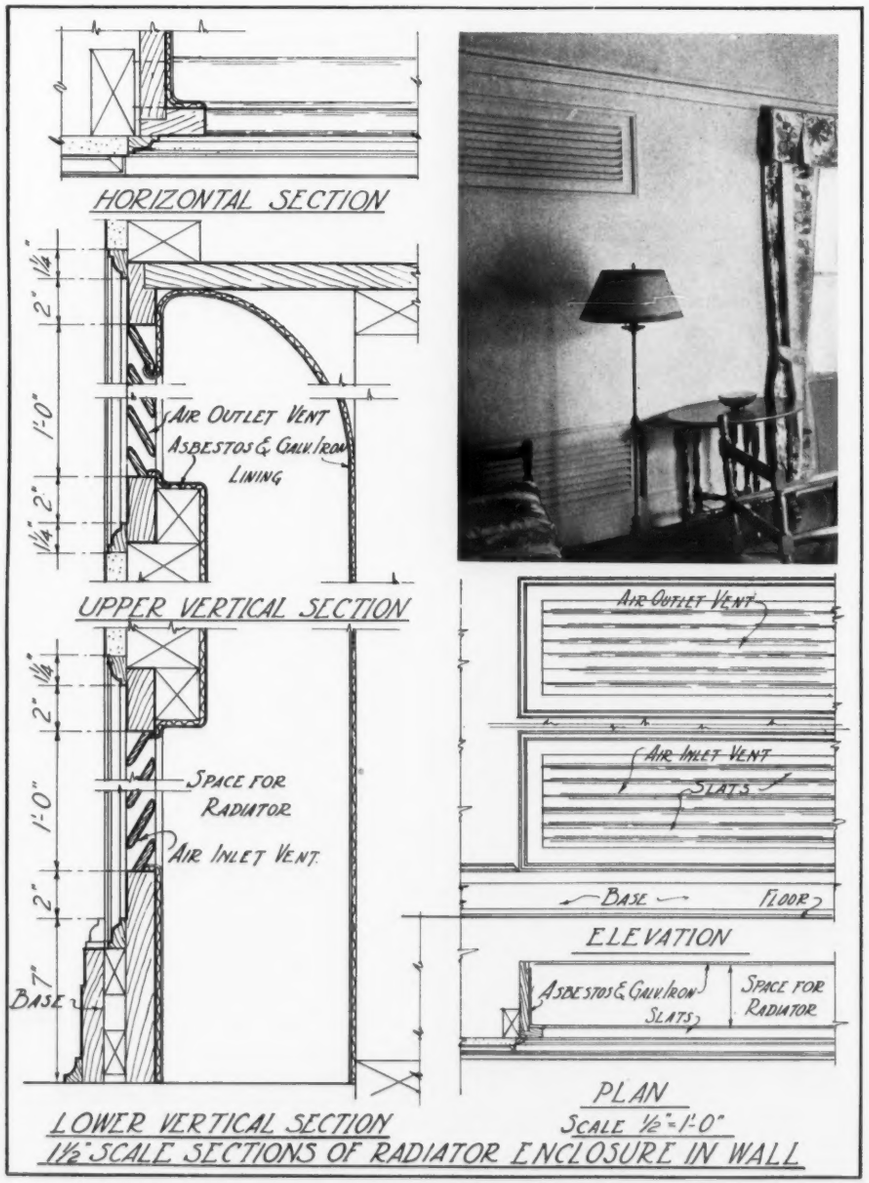

Photo by Eddy

RESIDENCE OF DR. E. E. CADY, SOUTHERN PINES, NORTH CAROLINA

Aymar Embury, II, Architect

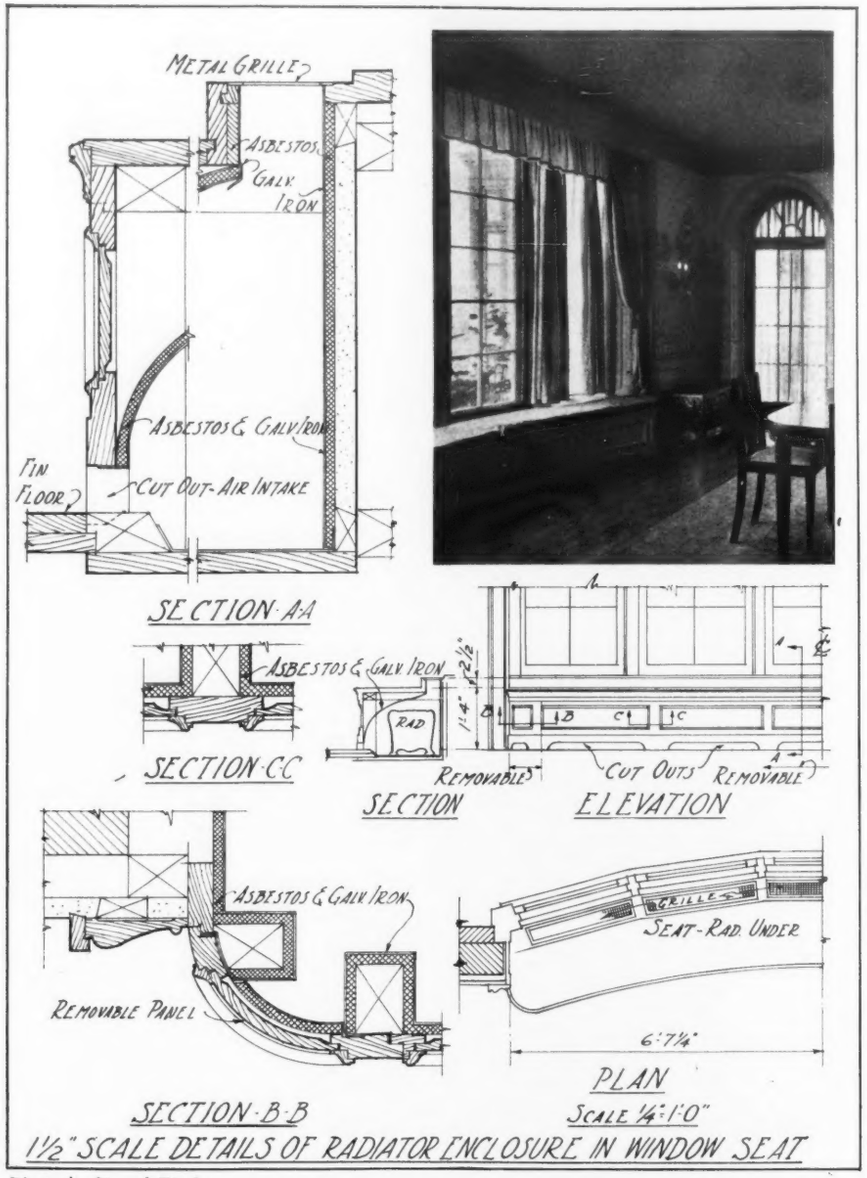

Photo by Sigurd Fischer

RESIDENCE OF JOHN H. EDEN, ESQ., GREAT NECK, LONG ISLAND, N. Y.

Greville Rickard, Architect

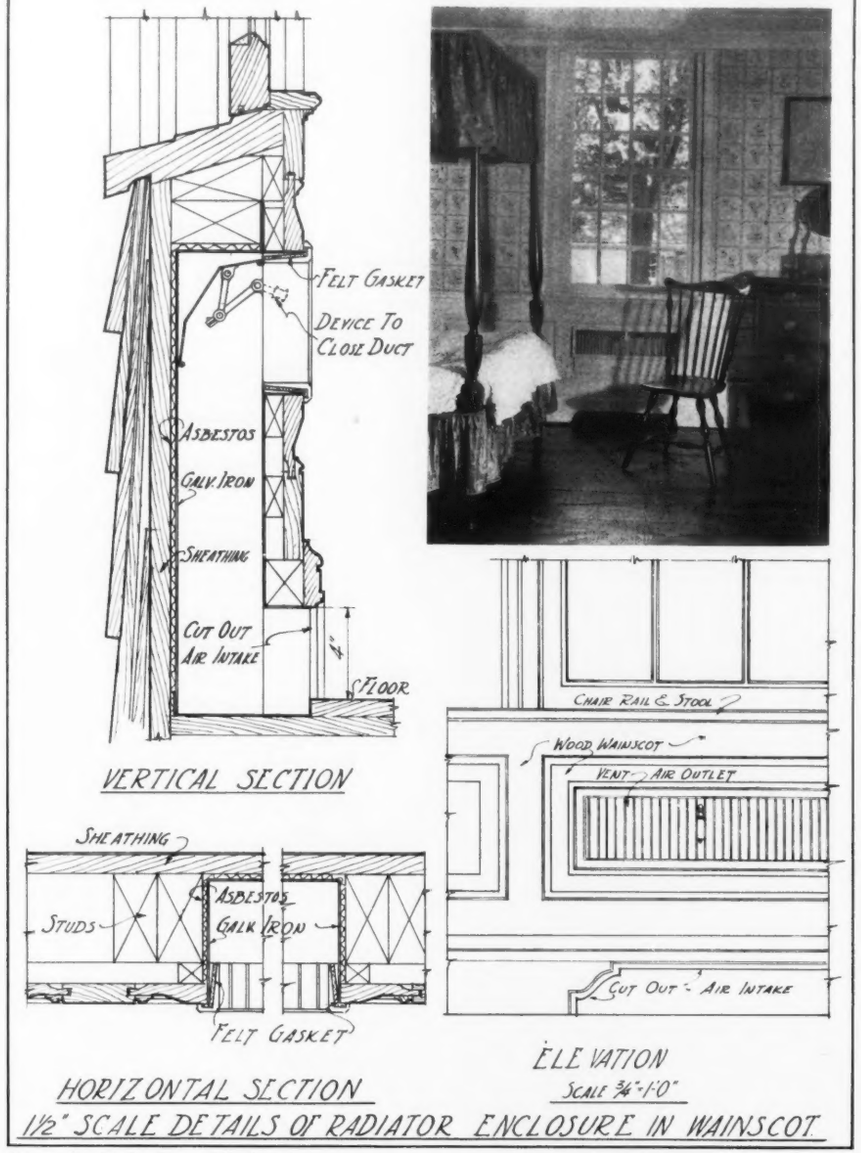

Photo by Richard Averill Smith

RESIDENCE OF TAPPING REEVE, ESQ., LITCHFIELD, CONNECTICUT

Richard H. Dana, Jr., Architect

COMPARATIVE DETAILS—RADIATOR ENCLOSURES

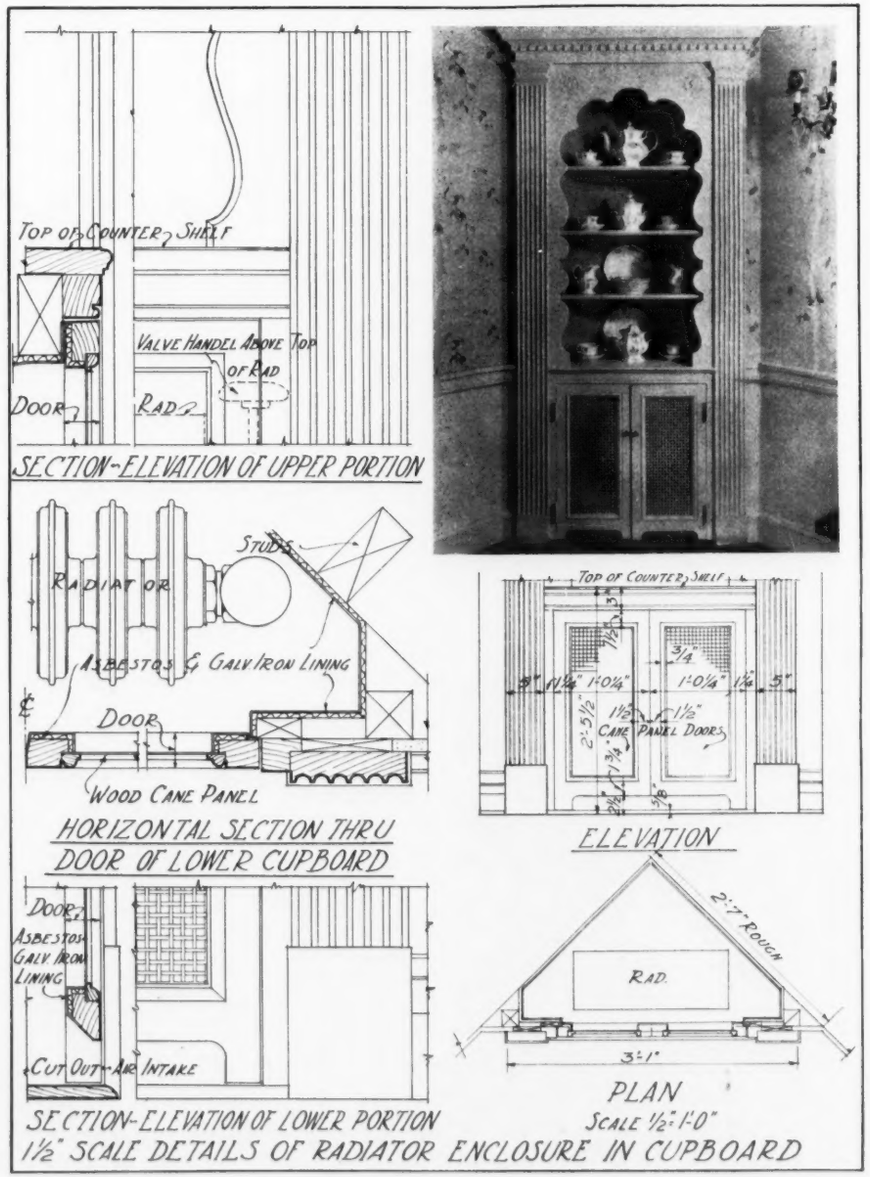

Photo by Van Anda

RESIDENCE OF JOSEPH HUSBAND, ESQ., BEDFORD, N. Y.

Godwin, Thompson, and Patterson, Architects

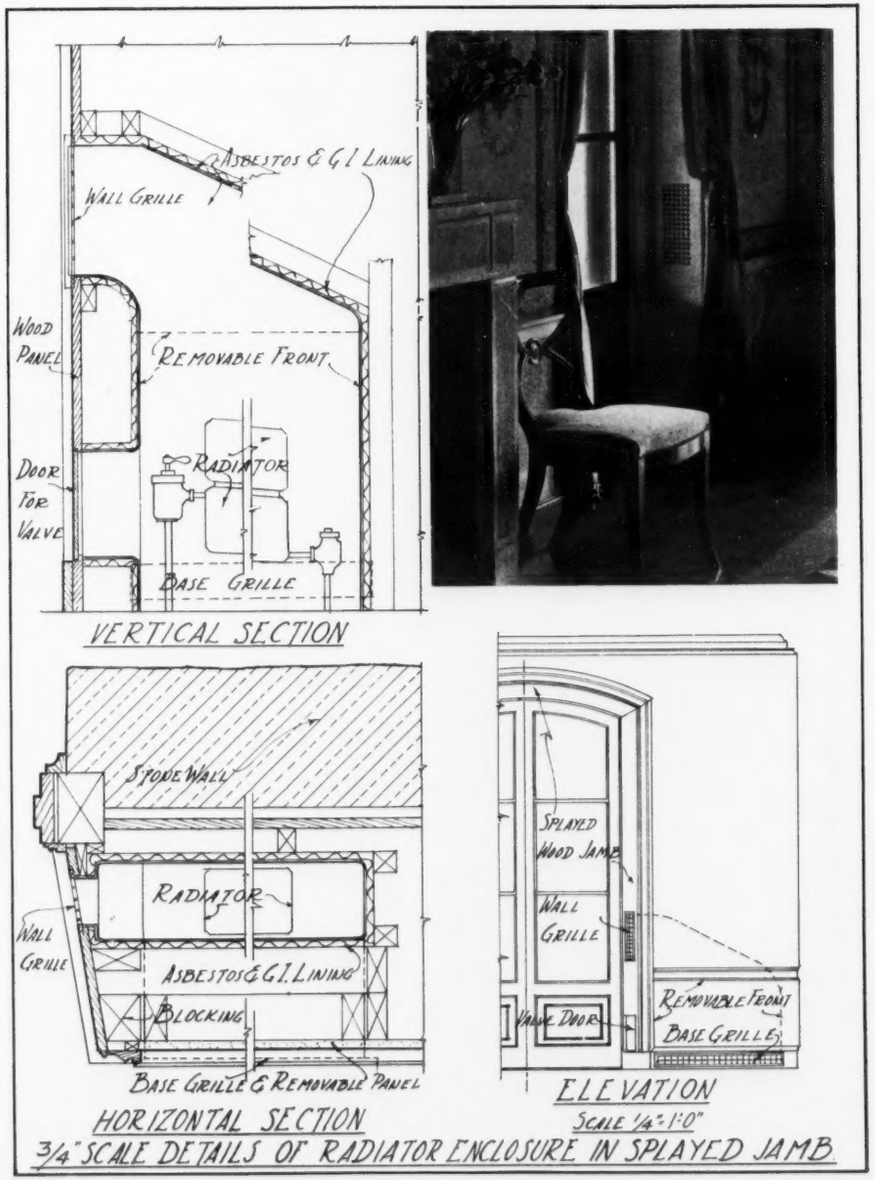

Photo by Gottscho

RESIDENCE OF CARROLL B. ALKER, BROOKVILLE, LONG ISLAND, N. Y.

Bradley Delehanty, Architect

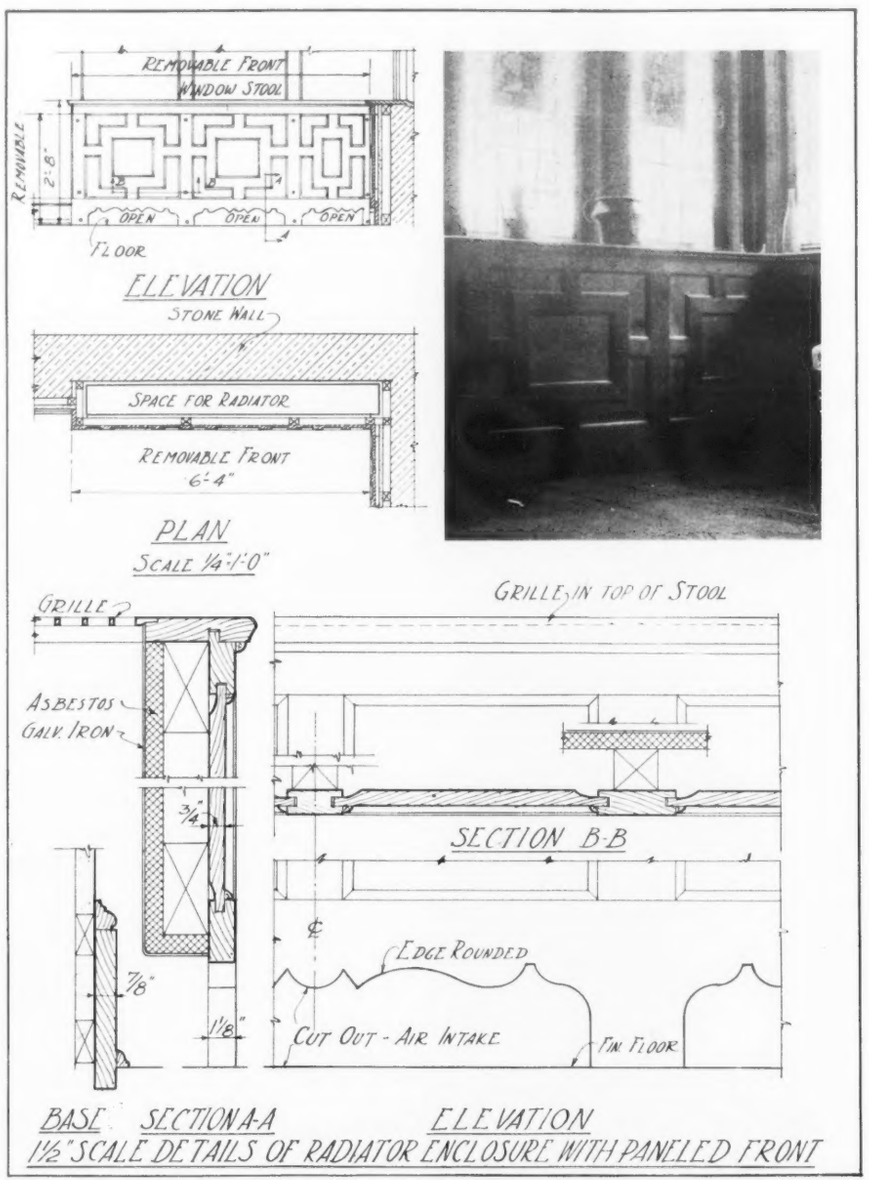

RESIDENCE OF C. L. SCHWEINLER, ESQ., WEST ORANGE, N. J.
Bernhardt E. Muller, Architect

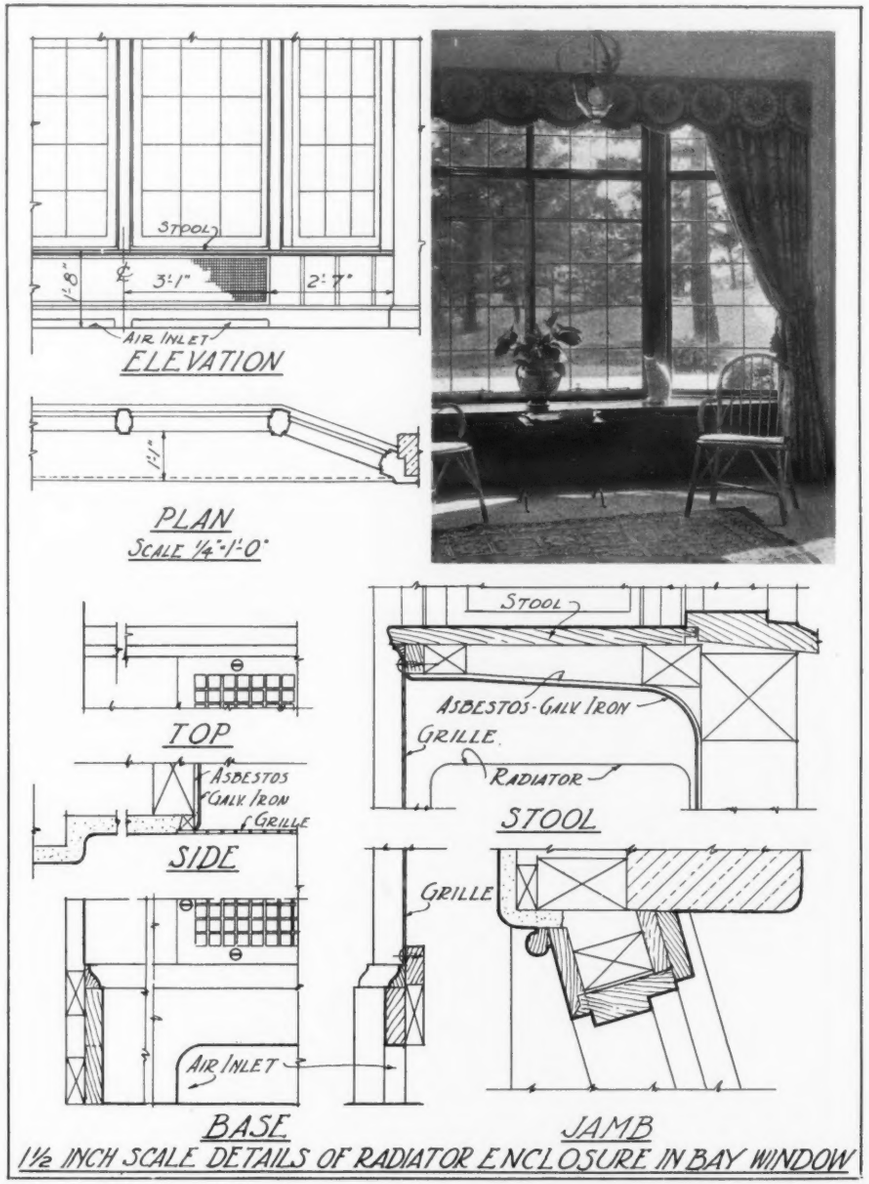

Photo by Richard Averill Smith

RESIDENCE OF MRS. H. H. OLTMAN, ALPINE, N. J.
Aymar Embury, II, Architect

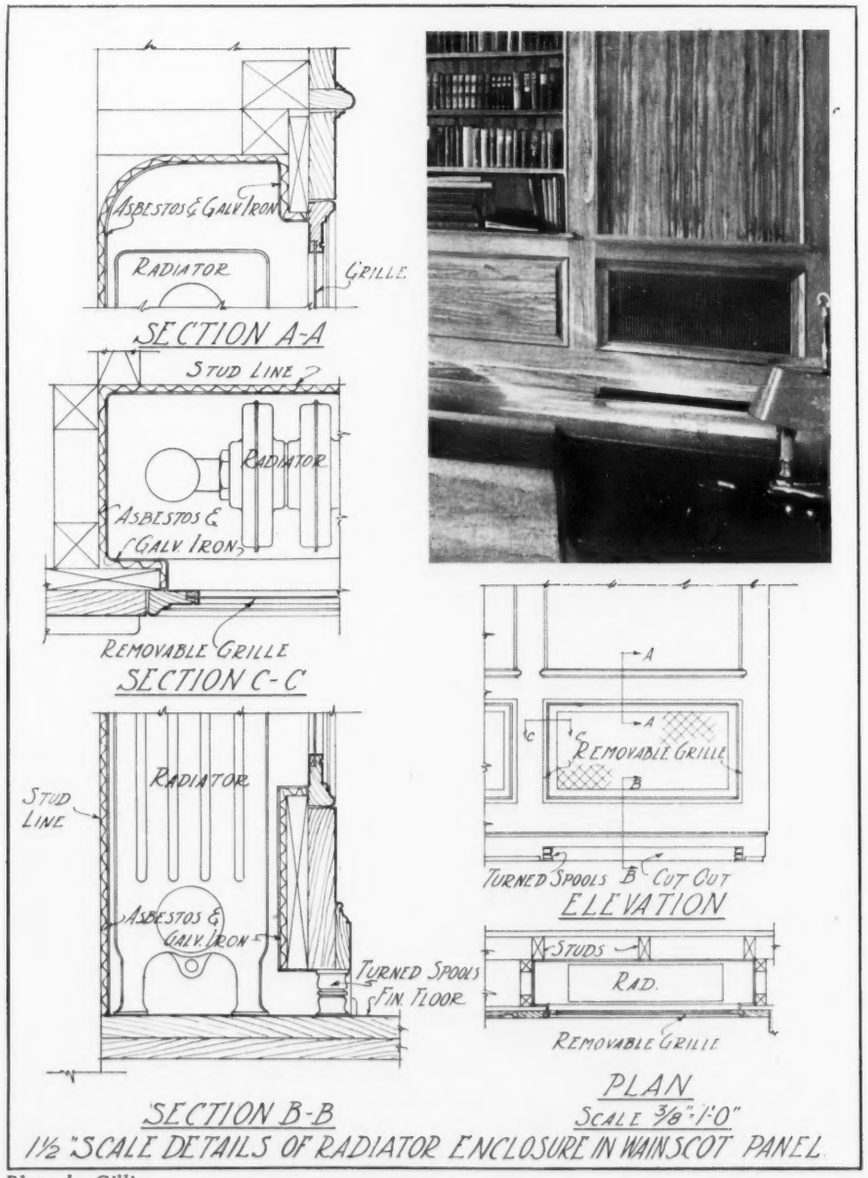

Photo by Gillies

RESIDENCE OF BENJAMIN D. MOSSER, ESQ., BERNARDSVILLE, N. J.

Greville Rickard, Architect

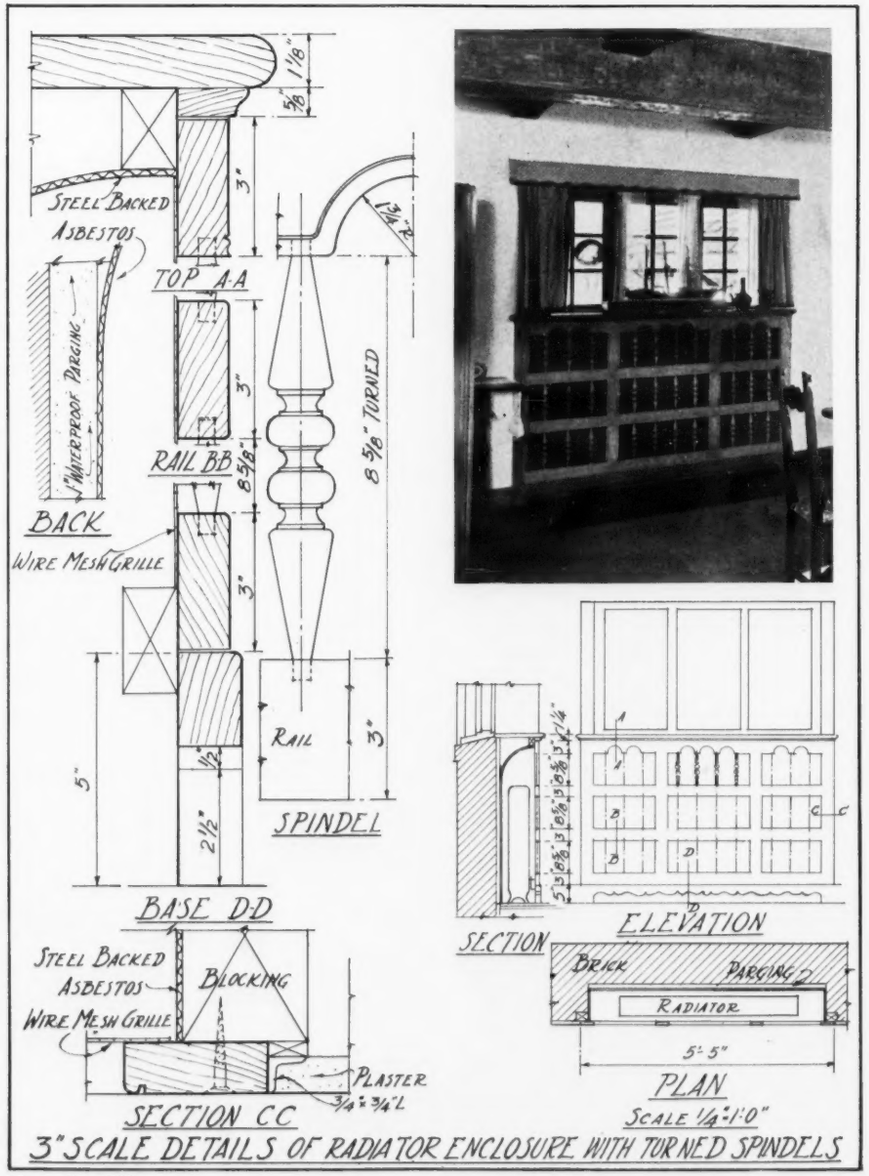

Photo by Gillies

RESIDENCE OF WILLIAM JOHN CURTIS, JR., HARRISON, N. Y.

Frank J. Forster and R. A. Gallimore, Architects

The Come-back

A Further Reply to Mr. Yaeger

By An Ex-Draftsman

That was a good one! A "corker!" Yes, sir! Being human, we all no doubt have had the "similar experience" which Mr. Roland Yaeger refers to in his interesting article, "Can Some Architect Answer This One," published in October issue of PENCIL POINTS.

Mr. Yaeger certainly put the finger on the boys, though he states the facts very mildly compared to the experience of some draftsman under the driving lash of the speculative building companies—especially those in the South and Southwest, where small wooden houses can be thrown together easily and quickly without great cost, and shoved off on the public with a maximum of speed and profit.

Of course, we have been warned of what the undermining and demoralizing principles of the unscrupulous contractors and the speculative builders do for the architectural ethics of a young draftsman just out of school, to say nothing of their effect on the legitimate practice of good architecture. or the future architectural beauty and taste of our country.

But . . . . draftsmen have to eat, don't they? What draftsman is going to think of ethics when every week he takes in his belt another notch? Not many! No, sir! Especially when the belt is already in the last one. I know I didn't. I took the plunge and went down for the count of two years (September, 1927, to September, 1929) never once getting my breath after the first leap. I'm on the come-back now with plenty of time on hand.

I'm not the architect upon whom Mr. Yaeger calls to "answer this one"; neither am I the experienced man in the practice of architecture, but, being one of the many victims of the speculative builder I believe I am well qualified to give some first-hand information.

On a memorable day in 1926 I came, with many others, out of school—a budding architect with high ideals and dreams. One year later, after doing all the things Mr. Yaeger mentions in his article—after the battle, and with the old belt in that last hole—what do you think? Ah! I found a job. Know that glorious feeling! You bet you do! We all know it.

But alas, it was in the quicksands of a speculative building company's "free plan office," where the harder you try to reach for the life-saving principles of good design the deeper you sink into the disreputed mire of the speculative system. Nevertheless, it means relieving some of the strain on the old belt; therefore, one is always glad of the job.

However, no draftsman whose soul has ever been touched with the true beauty or the inspiring ideals and standards of this magnificent profession of architecture could ever hope to maintain, or to feel that he is maintaining, these high ideals under working conditions such as he is subjected to in a free plan office—where plans and specifications are knocked out, whipped into shape with mechanical regularity and at a speed of one every two hours (or perhaps in less time) depending on the number of plans that the contractors and salesman need for that day.

Thumb-nail sketches would come in through the contractors and "high pressure salesman" of the "hot shot advertising department." They would be handed over to the robot draftsman to work into ¼" scale floor plans and one elevation—nothing more. The elevations had to be something catchy for the salesman "to get the job."

"Get the job!" Anything to get the prospect's name on the "dotted line" is the sole idea of hundreds of contractors and builders throughout this country. The "free plan service" is nothing more than a bait for the hook.

Another little trick of the speculative builder that leaves a nasty taste in the mouth of a self-respecting draftsman is to draw small floor plans and then make the elevations at ½" scale. Yet another is to show outside dimensions for room sizes to hoodwink unsuspecting and ignorant people into believing they are getting a much larger house for their money.

Little wonder that young draftsmen fresh from college, with the principles of a beautiful art imbedded in their minds, finally go on the rocks under the influence of such an atmosphere where everything is haywire. These draftsmen not only feel, but they know, they are not upholding the principles of the architectural profession. For them the question is: "What's to be done about it?"

It's not so much the putting of new blood into them as it is of getting the speculative and speed bugs out of their brain. It is these destructive bugs that eat at their morals —undermine their draftsmanship. If they are to rid themselves of these bugs and stage a come-back to the high standards of a legitimate architectural draftsman—to the ethics of those great men who have taught them architecture—they will, no doubt, be obliged to cut themselves free from such offices with their depressing influence and climb slowly back to the pedestal of high ideals which they so valiantly hope to maintain throughout their professional career.

Having closed the door of the speculator's office behind one, it is time to gallop out the old horses. Round them up anywhere, touch friend carpenter or the contractor himself for them, and set up your own drafting board for some real intensive study. Create a studio in any old corner of the boarding house, at home in the attic, or out in the garage. It makes no difference where, but study, and forget the speculator.

The disillusioned man must study and draw the things he loved so well in his last year of college. He must do free-hand work, preliminary sketches, pen and pencil drawings, colored renderings, perspectives, full-size details, lots of interior and exterior details. He must spend plenty of time on all drawings. He must not rush, but must take it easy—if he wants to get the speculative speed bug out of his mind. To go in for competitions, free lancing, or night school work will help a man to snap out of it.

There's nothing like hard work to help one to forget and rebuild one's confidence—the belief in one's ability to do things. Once this is accomplished a fellow is well on the road to a successful come-back.

Up! On your toes, boys! Be ready for that great day that will mark the recovery of all the building trades and industries—for it will surely come again.

Trends of the Building Industry

A Talk to the Producers' Council at their Ninth Semiannual Meeting, November 1, 1932

By Rolland J. Hamilton*

It has been suggested that I speak with respect to the trend of the building industry. Now, the popular definition of the word "trend," as applied to any given thing, is "Where is it going?" but unless there is coupled with this the pertinent questions—"Where has it been?" and "Where is it now?" the discussion of "trend" becomes sheer prophecy and hardly worth while. As briefly as possible, therefore, let us consider together certain aspects of our industry in broad perspective.

With all the vaunted progress of mankind, food, clothing, and shelter are the trinity of human necessities today as conclusively as in the era of the cave man. Those of us engaged in the building industry (architects, engineers, contractors, building trades, and material men), therefore, rightfully consider that we are dealing with basic needs; and that we are producers in the best sense of that term. Rather unaccountably, there are those who would not question the status of industries supplying food or clothing but who rise up today and declare that there is no place for new building enterprise and question when there will be. Yes, and there are defeatists in our own ranks. The root of such ill-advised talk is probably the fact that whereas food and clothing are items of current consumption requiring constant replacement, the item of shelter, the third member of this family of human necessities, is a matter of capital investment. In other words, the replacement of food and clothing must be immediate; whereas the replacement of shelter can be postponed. In the midst of a period more acute than ever before experienced, the weak-hearted and nonobservant fail to appreciate that the stream of our business is dammed and not dried up; that the demand is piling up but not extinguished and that the longer we suffer our present situation the greater the force of pent-up requirements. The cycle of food replacement is daily; that of clothing is measured in months; whereas the cycle of building is equally inexorable but is measured in years.

Although there are no definite statistics, it is probable that the average life of all buildings in this country, past and present, is approximately forty years. That such life is not longer is no fault of the buildings, but is predicated on changing human desires, on fires and other calamities, and on economic considerations. There is nothing to indicate pending change in this situation. Let us then sound the keynote of our observations by asserting that the building industry is just as sound today as it has ever been in our history; and that never has the public demand for new and better buildings of all kinds been more pronounced than at this moment. In our opinion, every man connected with this industry should be prepared to affirm the integrity of this statement and refuse to be put on the defensive with respect to these fundamentals. A large industrial corporation recently circulated a questionnaire among its employees asking how they would choose to spend their surplus earnings upon the return of prosperity, and of these approximately 15% listed new homes as their first desire. (Assume entire population the same!)

The year 1925 was the peak of residential construction and during that year in 257 cities (constituting probably less than 40% of the total population of the country) there were erected accommodations for 491,000 families. By a steady process this shrank until in 1931 the like figure was 98,000 families, with an estimate for 1932 of 65,000 families. These 65,000 family units add only 2/10 of 1% to the existing stock of housing accommodations, and the cost thereof is probably less than the annual fire loss alone in this class of buildings. In other words, there are in this country approximately 32,500,000 family units and with a normal replacement factor of 2½% per annum, the average requirement without regard to growth of population, is between 800,000 and 900,000 family units per annum. During this period since 1925 there was an increase in population of probably 11,000,000 and approximately 7,500,000 marriages.

The doubting Thomases assert that regardless of these statistics the country is full of empty buildings and why talk of more. Leaving aside the fact that it is a good thing to talk about building for some time before actually beginning (see any architect!), the implication is false. The midsummer report of the National Association of Real Estate Boards indicated shortages in single family houses in 10% of the cities surveyed, and in spite of much doubling up of families, a normal balance of supply and demand in 76% of the cities. Six per cent of the reporting cities had a shortage of apartment buildings and 66% reported a balanced supply. This means that immediately economic betterment ensues, there will be a vast unscrambling of the prevailing "doubled up" situation, and a shortage of housing space for these families. There is little possibility of overemphasis with respect to the implications of this statement. Of lower priced city housing we shall speak later, but no one who will take the pains really to investigate can doubt that, despite our economic afflictions, there is a present demand for such accommodations of really tremendous proportions —and at prices which yield a fair return.

It is frequently stated that the country is not financially able to bear the burden implied by statistics of building needs. Let us investigate. In the peak year of residential building—1925—the total per capita expenditure for new housing accommodations was $24, and the total per capita expenditure for all classes of buildings (except public works and utilities) was $43—this with an estimated national income of $741 per capita. The truth is that even in this peak year of expenditures, the American people were amply able to afford the small percentage of their income dedicated to new construction; and are able to do so again. Does any one question that our people can afford as much for the building of their homes as

*President, American Radiator Co.

they can for their automobiles? Yet in 1931 the approximate expenditure for new automobiles was $1,407,000,000 and for new residences was $811,390,000.

The difficulties of building finance have often obscured the real facts pertinent to the foregoing. This problem of finance of new buildings fundamentally is a very simple one. Funds to supply a capital investment of forty years' duration in any given case are desired at a certain time, and what does the owner do? Borrows wherever available one-half or two-thirds of the requirements of this forty-year investment at a high rate of interest for a short period, trusting to luck that the renewal will not come in one of those unfortunate periods such as the present when few possessors of capital desire to invest it. Why should bonds backed by the American home be unmarketable and bonds backed by our trunk line railroads sell on a 4½% basis? Why do the older countries of the world consider the home the best of security and people willingly put their savings into home securities at low rates of interest for periods of time sufficient to permit payment out of current savings, whereas in our great country the small home owner begs for the privilege of paying 6% interest plus commissions and takes the chance of being unable to renew at maturity. It is shocking that over a normal period of 10 to 15 years for payment, out of savings, of the cost of a small home, the owner, even if fortunate enough to renew his periodic mortgages, frequently pays over 25% of the original cost of the home in penalties, that is, in costs over and above a sound interest rate. For these and other evils the building industry is far from blameless. In an era when speculation and promotional activity were dominant, our industry went along with the rest. But let us not castigate ourselves to the point of self-deprecation. Let those who are without blame cast the first stone—and there will be few rocks flying.

The fact is that over a long period of time real estate mortgages have proven an excellent investment as shown by the large holdings thereof by our most conservative investment institutions. The losses witnessed in these abnormal times are no criterion of the past or future. Rather than yield to an ill-grounded pessimism let us attain a fresh perspective and use our utmost powers to prevent a recurrence of the present situation. Buildings well designed, honestly built with good materials, and intelligently adapted to human needs, are the best security in the world and immutably money will flow to the financing of such structures. If, to attain public confidence necessary to meet this financing situation, we must for a further period see our industry creep rather than run, let us face it as bravely as we can with the sure knowledge that money is the most fluid of all things and inevitably knocks at the door that opens the way to sound and profitable investment. And perhaps most of all is the need to carry to the American people the message that the building industry is not a creature of wild speculation, or unsound growth, or of financial fallacies, but represents a basic human need; and in its largest single expression, the home, is the veritable bulwark of every social system. The American home, church, and school are generally lauded as the institutions on which our civilization rests; but for each unit there must be a building before there is an institution. It is regrettable that our financial practices have not kept pace with the emotional appeals of these mighty forces.

That an awakening impends is amply implied by certain recent developments. October 15, 1932, is one of the most important dates in the history of the building industry because it was on that day the new system of Federal Home Loan Banks opened for business.

To the President of the United States must go full credit for proposing this measure and for holding before the people the pressing public need for its enactment from the day the Congress met up to the last day of the session. Once advanced, Democrats and Republicans alike joined in its support. The passage of that bill and the opening of these banks should mark the beginning of a new day in American home ownership.

In the words of President Hoover, "To possess one's own home, however small, is the hope of every family in our country. That is the American idea, born of an exquisite sentiment, nurtured by a long national tradition, and proved right by its innumerable practical advantages.

"Financing of home ownership has not kept pace with improvement in design. Almost any other desirable possession can be purchased in installments on the basis of 25 per cent in cash and the balance secured on the property and somewhat upon the character of the buyer. A home and the home owner are the best credit risks in our country. There is no character credit comparable to a family struggling to own its home. But finance of homes too often continues on terms comparable to the credit extended by a pawnbroker. The family willing to work, save their money, apply the savings to payment for their house is not only a sound basis of credit, but a sound basis for the nation. Every interest in life ties them to maximum effort to succeed. *They must have credit upon terms adjusted to their little of cash and their much of character.*"

This major addition to the nation's banking system is more than a device to meet the present emergency. It is a permanent central core for the financing of home ownership. As it gets under way it will separate long-term borrowing for a home from its present entanglement with short-time borrowing for commerce, industry, and speculation. That alone will do much to cut down hazards and so cut down home ownership costs. The new system will bring a large proportion of all home financing institutions under uniform regulations and set up specific and sound standards for the making of its own type of home mortgage loans. This done, all mortgages which meet these standards become readily discountable, or "liquid," just as commercial paper has for years been discountable through the Federal Reserve System.

All properly supervised banks, cooperative banks, building and loan associations, homestead associations, and insurance companies may now borrow money from these banks, giving their eligible home mortgages as security. For many months such institutions, generally, have been without funds for mortgage investment. With this new and stable source of credit they are, to the degree that they employ it, now in a position to make new loans or to refinance existing home mortgages.

As rapidly as it can be drawn into use the new reserve system will open a new and stable source of financing to families now ready to buy or build their homes. By assuring capital of a new degree of safety it will encourage its flow from the money centers to all geographical sections of the country, however remote, where there is demand for home construction and home ownership. Because of the standards of safety which it will enforce for its own loans, it will eliminate from them those factors of risk which are the largest element of cost. It will, therefore, be able to advance money to its member institutions at a minimum rate of interest. As this gain is passed on, the financing cost to the home owner for mortgages

of the type eligible for discount should be reduced.

Again in the words of President Hoover, "The broad purpose is to provide for the home owner a comparable background of stable credit with that we have already provided nationally for the business man through the Federal Reserve Banks and for the farmer through the Farm Loan Banks and the Intermediate Credit Banks. The plan and method is not to engage the new institutions in the business of providing direct loans but to give impulse, security, and safety, and lower interest rates to the already existing institutions—especially the mutual institutions—in order that they may extend the fullest measure of credit to would-be home owners."

In brief, the Home Loan Bank System should accomplish these major objectives:

1. Relieve the immediate emergency in preventing further disastrous liquidation of home mortgages.
2. Provide immediate funds for necessary rehabilitation of existing homes.
3. Stabilize future home financing and establish sound future basis for the home construction industry.
4. Most important to all of us, it greatly widens the market for materials and labor for the entire building industry since these banks make available immediately $134,000,000 for new mortgages on homes and for refinancing present mortgages, and can draw potential capital for these purposes as rapidly as needed up to $1,600,000,000. This means that, after the Home Loan Bank System gets into operation, the building industry can expect this banking system to provide funds and credit to create approximately five billion dollars worth of home building and repair work during the next three years. The far-reaching effect of this is best appreciated when it is realized that in the peak year of 1925 we spent only one-fourth of this amount for single family houses.
5. This is the best assurance of the future of the building industry—next to agriculture the largest industry in the country and which in normal times with its total volume of seven billion dollars, pays in normal years, like 1926, the largest American wage bill amounting to more than three billion dollars.

The lack heretofore of motivating social sense in our country with respect to living accommodations for that large proportion of our population with small incomes, becomes startlingly apparent when we consider the problem of blighted residential areas and slums. We are paying the price for the dogma of individualism or what is sometimes known as every man for himself and the devil take the hindmost. We take pride in saying that no man, woman or child, however unworthy, can be allowed to starve; but we have not reached the point of saying that families however worthy shall not be permitted to live in habitations unfit for human occupancy. It is probably an old story to all of you, but worthy of repetition, that of 640,000 family units of habitation outlawed in a very real sense a generation ago in the City of New York (commonly known as old law tenements), 525,000 thereof are still in existence; and to a greater or less degree this is true not only in our great cities but in the non-urban territory as well. The social conscience of every other industrial nation in the world has been invoked by the like problem. The United States stands alone in its isolation. We are not bespeaking the expenditure of public funds for this purpose, unless in times of emergency. An aroused social conscience on the part of the public and some straight thinking by the building industry will amply care for the problem. And when this comes, for it is surely coming, the building industry will have the opportunity not only of testing its capacity, but of proving that it is a faithful instrumentality for public good.

The knowledge of this speaker does not suffice for a detailed discussion of a phase of this general subject which is on the lips of many. What of new materials, new methods, a new approach to the problem of building that will give the public more for their money, and chiefest of all, give to the family of small means—and that is the average family—the opportunity for better living quarters whether in multiple story apartments or single family dwellings. We make no predictions, but at least let it be said that there are those who are dreaming dreams and seeing visions. There are those with a breadth of view that permits at least a temporary forgetting of precedents. There are those who are willing to forget that things have been done in a certain way and with certain materials for a long time and are open-mindedly searching for new ways and new materials, yes, and new design. I beg of you not to misunderstand these statements. There is not intended the slightest derogation of our industry; but I do appeal for more of the research spirit, for more tolerance toward new ideas, and for a searching of the mind on the part of all of us to the end that our industry may make more progress and better serve the needs of mankind.

In all these plans and aspirations there is requisite a unity of effort between the various factors contributing to successful construction. Candidly, the building industry has not been as "industry conscious" as the common good warrants; but that this problem is recognized and that substantial progress is being made toward its solution is betokened by the organization under whose auspices we are assembled this evening. As a manufacturer of building equipment over a long period I have yet to observe an authenticated instance of real unfairness on the part of a reputable architect or building contractor. Differences of opinion—yes; clashing of legitimate self-interest—certainly; but of bad faith not one case. Which leads me to believe that practically all the friction that does arise between architect, contractor, and material man, comes either because one or the other of these factors seeks to usurp improper functions in a given case; or just perchance may I whisper because we sometimes for a profit seek to beat the game by encouraging those who fall without the pale of the word "reputable." But it seldom pays; in fact the lesson we learn from the school of experience is that the building industry inherently requires various factors successfully to serve the public and that only by a recognition hereof and a drawing together of these factors into harmonious interest will the public be served and ourselves rewarded.

Much as one might desire to rest on an avowed optimism with respect to future trend, it would be taking advantage of your forbearance as listeners not to say something of the immediate trend—in other words of 1933. In our opinion the prospects for next year are definitely better than the status of 1932 especially as regards residential work, which in terms of square feet of floor space awarded normally represents about 55% of total building construction. We believe there is an exceedingly large pent-up demand for this class of work destined to bring substantial activity over a considerable number of years; and that 1933 will see a start of such activity. Commercial building comes later in the cycle and will probably

have to await its turn. The measure of the start predicted for next year will depend on the customary factors governing industrial activity—revival of confidence in general and investment confidence in particular.

In conclusion and to summarize, the trend of the building industry is that of a basic need in the richest country in the world wherein the public are demanding better homes, schools, churches, and public buildings; a country which for over one hundred years has expanded its wealth and production at an average annual rate in excess of 4% and can well afford the better structures it desires. Because it represents a capital investment and the needs of the moment may be deferred, it is necessary in considering this trend to think in building cycles rather than in terms of a given year. With this approach, our industry is clearly seen as resting on unimpaired foundations; and after suffering recessions probably more severe percentage-wise than any major industry, it has the vitality and the faith to envision a future greater and more prosperous than ever before known.

IN THE ERIE BASIN, BROOKLYN

PROPERTY STREET, CENTRAL PARK, MANHATTAN

TWO SKETCHES OF THE ARCHITECTURE OF UNEMPLOYMENT, NEW YORK

Drawn on the spot by Robert Wiseman who has made a series of such views to record a transient, we hope, phase of building that has become common in various parts of New York during the current depression.

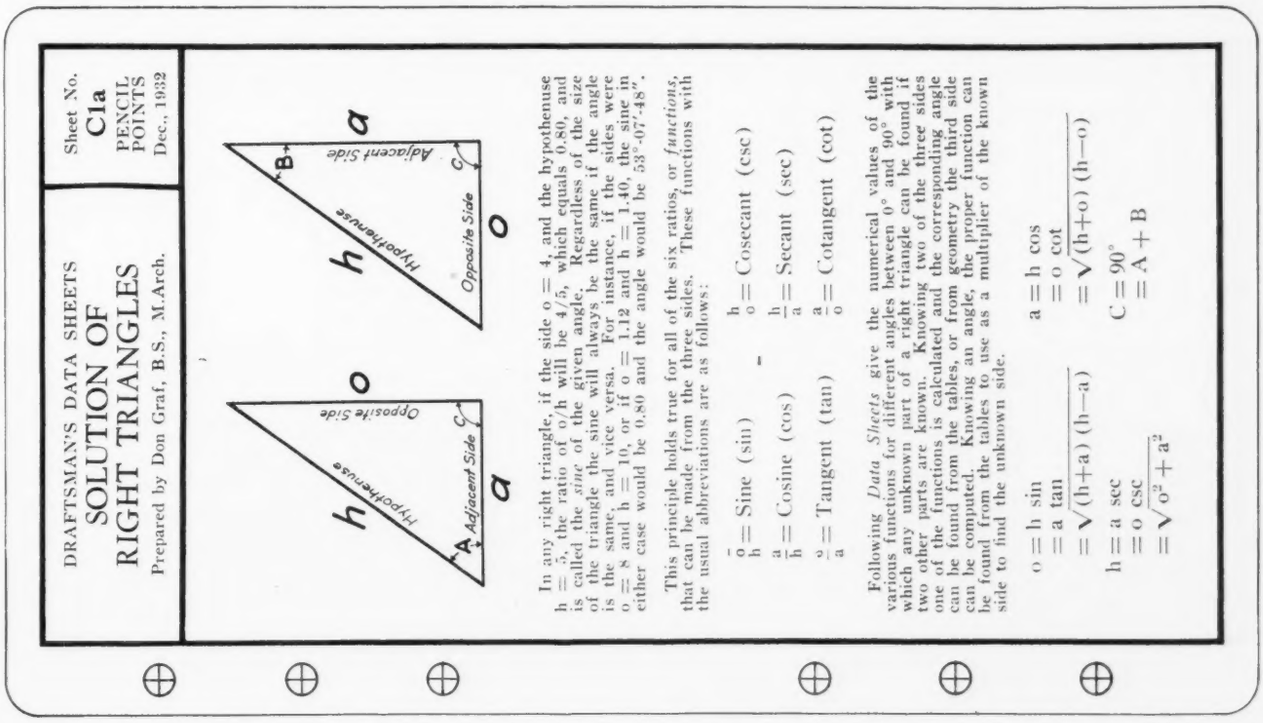
DRAFTSMAN'S DATA SHEETS
SOLUTION OF RIGHT TRIANGLES
Prepared by Don Graf, B.S., M.Arch.
Sheet No. C1a
PENCIL POINTS
Dec., 1932
Hypothenuse
Opposite Side
Adjacent Side
A
B
C
h
o
a
In any right triangle, if the side o = 4, and the hypothenuse h = 5, the ratio of o/h will be 4/5, which equals 0.80, and is called the *sine* of the given angle. Regardless of the size of the triangle the sine will always be the same if the angle is the same, and vice versa. For instance, if the sides were o = 8 and h = 10, or if o = 1.12 and h = 1.40, the sine in either case would be 0.80 and the angle would be 53°-07'-48".
This principle holds true for all of the six ratios, or *functions*, that can be made from the three sides. These functions with the usual abbreviations are as follows:
o/h = Sine (sin) — h/o = Cosecant (csc)
a/h = Cosine (cos) — h/a = Secant (sec)
o/a = Tangent (tan) — a/o = Cotangent (cot)
Following *Data Sheets* give the numerical values of the various functions for different angles between 0° and 90° with which any unknown part of a right triangle can be found if two other parts are known. Knowing two of the three sides one of the functions is calculated and the corresponding angle can be found from the tables, or from geometry the third side can be computed. Knowing an angle, the proper function can be found from the tables to use as a multiplier of the known side to find the unknown side.
o = h sin = a h cos
= a tan = o cot
= √(h+a)(h−a) = √(h+o)(h−o)
h = a sec = o csc
= √(o²+a²)
C = 90°
= A + B

DATA SHEET NO. C1a. *The clever gents who write "Trig" textbooks try to make it hard with their "ordinate" and "abscissa" business. Use the common-sense designations of "opposite side" and "adjacent side" and anybody can do it —just try it yourself the next time you get a cock-eyed lot to dimension.*

THE DRAFTSMAN'S NOTEBOOK

Four *Data Sheets* will appear each month in PENCIL POINTS, which if preserved will form a useful and growing source of information for instant reference at the drafting table. When cut out and punched these sheets fit a standard 6-ring notebook. Readers are urged to make comment or suggestions to Don Graf, PENCIL POINTS, 419 Fourth Ave., New York.

Thanks to John Endres, Franklin Square; Robert F. Duke, Saskatoon; G. A. Yeomans, Montclair; John I. Finley, Pittsburgh; Clarence G. Johnson, Albuquerque; —for very interesting letters.

Since the *Data Sheets* first appeared last January, over one hundred subjects have been suggested by correspondents for inclusion in the *Notebook*. Since most of the subjects require several sheets for treatment, and only four appear each month, a little rapid calculation shows a certain amount of patience will be necessary if the *Data Sheet* that you requested doesn't appear promptly.

As fast as it is possible the requested subjects will appear, preference being given to those asked for by the greatest number of readers, so your letter will help to decide what comes first.

—And a Merry Christmas to yo' all—youzza!

COMPETITIONS FOR THE ROME PRIZES

The American Academy in Rome has announced its annual competitions for fellowships in architecture, landscape architecture, painting, sculpture, and musical composition.

In architecture the Daniel H. Burnham fellowship is to be awarded; in landscape architecture the Kate Lancaster Brewster fellowship; and in musical composition the Frederic A. Juilliard fellowship.

The competitions are open to unmarried men not over 30 years of age who are citizens of the United States. The stipend of each fellowship is $1250 a year with an allowance of $300 for transportation to and from Rome. Residence and studio are provided without charge at the Academy, and the total estimated value of each fellowship is about $2000 a year.

The Academy reserves the right to withhold an award in any subject in which no candidate is considered to have reached the required standard.

The term of each fellowship is two years in architecture and landscape architecture, three years in painting, sculpture, and musical composition. Fellows have opportunity for extensive travel and for making contacts with leading European artists and scholars.

The Grand Central Art Galleries of New York City will present free membership in the Galleries to the painter and sculptor who win the Rome Prize and fulfill the obligations of the fellowship.

Entries for competitions will be received until February 1st. Circulars of information and application blanks may be obtained by addressing Roscoe Guernsey, Executive Secretary, American Academy in Rome, 101 Park Avenue, New York.

COMPETITION FOR LE BRUN SCHOLARSHIP

The competition for the Le Brun Traveling Scholarship of $1,400 has been announced by the New York Chapter of the American Institute of Architects.

The scholarship, established by Pierre L. Le Brun, is awarded annually to promote the artistic, scientific and practical efficiency of the architectural profession, and entitles the winner to a European trip of not less than six months for further architectural study and practice.

All contestants must be practicing architects or architectural draftsmen, citizens of the United States, between the ages of twenty-three and thirty, who have been actively engaged in their profession for at least three years, and

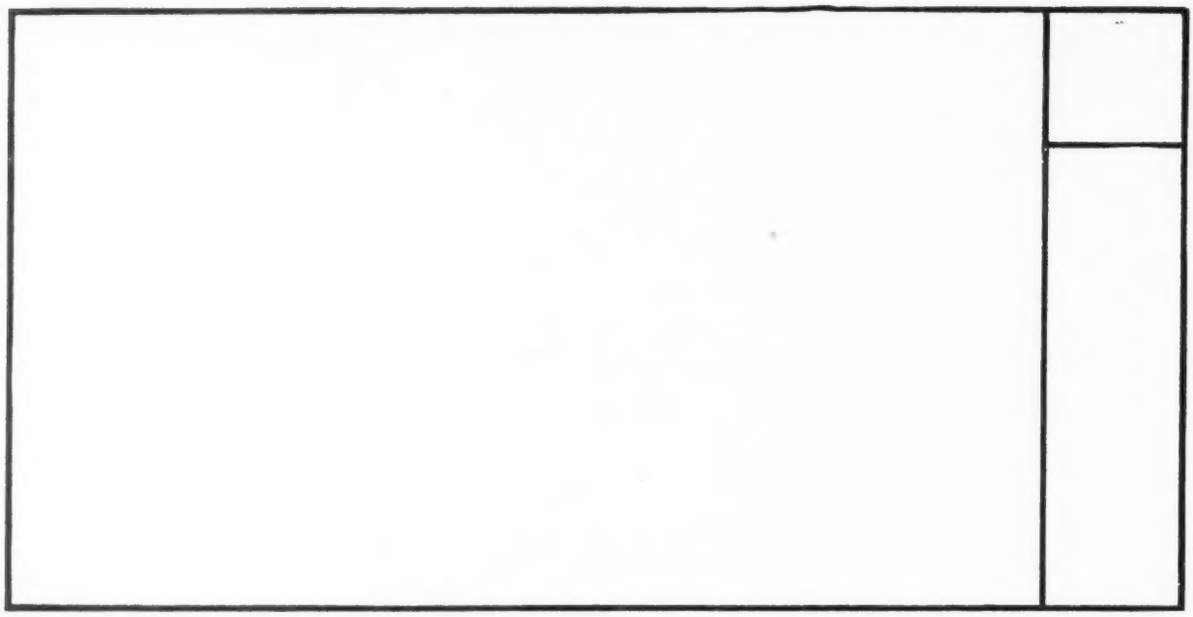

have not previously been beneficiaries of any traveling scholarships. They must be specially nominated by a member of the American Institute of Architects who will certify that they meet these requirements and are deserving of the scholarship.

The problem for the competition will be announced early in January by the scholarship committee of the Institute, of which Chester H. Aldrich is chairman. Other members are Oliver Reagan, D. Everett Waid, Otto Langmann, and Lindley Franklin.

Nomination blanks may be obtained from the secretary of any Chapter of the American Institute of Architects, or from the Le Brun Scholarship Committee, 522 Fifth Avenue, New York. Nominations must be received before January 15, 1933.

THE JAMES TEMPLETON KELLEY FELLOWSHIP

This Fellowship with an income of $2,500 for one year, more or less, as seems best, was established in 1929 by Mrs. James Templeton Kelley in memory of her husband. The Fellowship is administered by the Boston Society of Architects (a Chapter of the American Institute of Architects) and is to be assigned to an individual of proved ability, whether a student, an instructor, a draftsman, or a practicing architect, for foreign travel for the pursuit of advanced studies in Architecture. It is open to any man or woman residing within the area under the jurisdiction of the Boston Society of Architects (Maine, New Hampshire, Vermont and Massachusetts), a citizen of the United States of America, and preferably over thirty years of age, and is to be awarded annually on the basis of evidence submitted by the applicant, and otherwise secured by the Committee on Education of the Boston Society of Architects.

The Executive Committee of the Boston Society of Architects makes the award on the recommendation of the Committee on Education of the Society. The holder is eligible for re-appointment. If, in any year, no suitable candidate appears, the sum available is to be set aside as a separate fund which may be used to defray expenses incurred in publishing the results of the work produced by any of the James Templeton Kelley fellows, or for other purposes connected with the Fellowship. In any year, the Committee may reserve a part of the income, not exceeding $500, to defray expenses incurred in the administration of the Fellowship.

Applications for the year 1933 should be in the hands of Niels H. Larsen, Secretary of the Committee on Education of the Boston Society of Architects, 814 Statler Building, Boston, on or before January 18, 1933, and should state the applicant's age, education, experience, present occupation, and suggestions for his work abroad.

ARCHITECTS CONFER WITH CLIENTS AT BUILDING MATERIALS EXHIBIT IN LOS ANGELES

A movement to foster a closer relationship between architects, owners, and manufacturers has been inaugurated by forty-four leading architects in Los Angeles. They have planned a schedule in which each architect spends a half day a month in the Architects' Building Material Exhibit to confer with clients and manufacturers.

The display rooms include exhibits of the latest in building materials and equipment, making it possible for the architects to inspect them, confer with the manufacturers, and show their clients actual installations of the materials they plan to specify.

The first month of this schedule has been successful to such an extent that it has been decided to continue it during December and January. The architects who have participated in the activity include Gordon B. Kaufmann, Roland E. Coate, Reginald D. Johnson, Harold Chambers, Carlton Monroe Winslow, John Byers, H. Roy Kelley, Newton and Murray, Paul Williams, Ralph C. Flewelling, Arthur Kelly and Joe Estep, Palmer Sabin, Witmer and Watson, Heth Wharton, Marsh-Smith and Powell, Garrett Van Pelt, Jr., Gable and Wyant, W. L. Risley, Richard J. Neutra, R. M. Schindler, Hibbard and Gerity, Henry Withey, A. C. Zimmerman, L. A. Parker, Vincent Palmer, William H. Harrison, and Allen Ruoff.

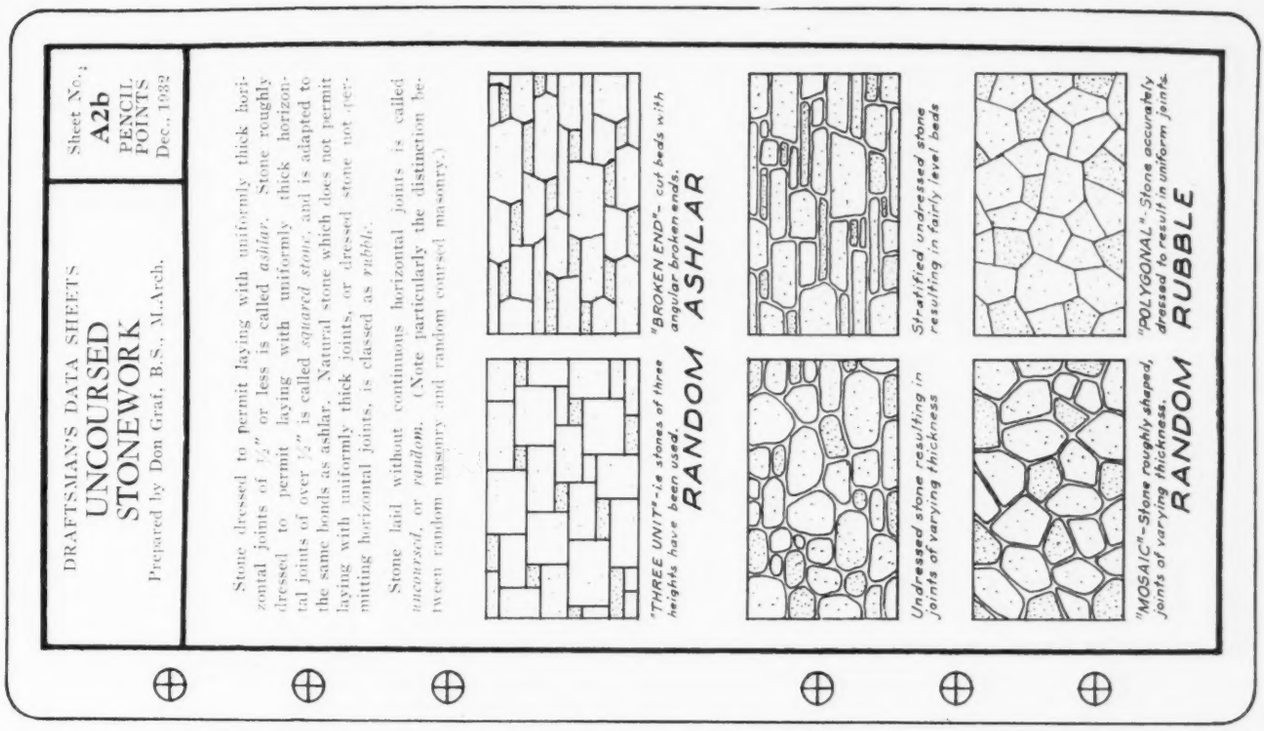
DRAFTSMAN'S DATA SHEETS
UNCOURSED STONEWORK
Prepared by Don Graf, B.S., M.Arch.
Sheet No.: A2b
PENCIL POINTS Dec., 1932
Stone dressed to permit laying with uniformly thick horizontal joints of 1/2" or less is called ashlar. Stone roughly dressed to permit laying with uniformly thick horizontal joints of over 1/2" is called squared stone, and is adapted to the same bonds as ashlar. Natural stone which does not permit laying with uniformly thick joints, or dressed stone not permitting horizontal joints, is classed as rubble.
Stone laid without continuous horizontal joints is called uncoursed, or random. (Note particularly the distinction between random masonry and random coursed masonry.)
"THREE UNIT"-ie stones of three heights have been used.
RANDOM ASHLAR
"BROKEN END"- cut beds with angular broken ends.
Stratified undressed stone resulting in fairly level beds
Undressed stone resulting in joints of varying thickness
"MOSAIC"- Stone roughly shaped, joints of varying thickness.
RANDOM RUBBLE
"POLYGONAL"- Stone accurately dressed to result in uniform joints

DATA SHEET NO. A2b. *The first of three sheets devoted to the bonds of stonework, prepared with the help of the Indiana Limestone Company. Considerable research has failed to show definitions or illustrations in any other source which give unconflicting data on this subject.*

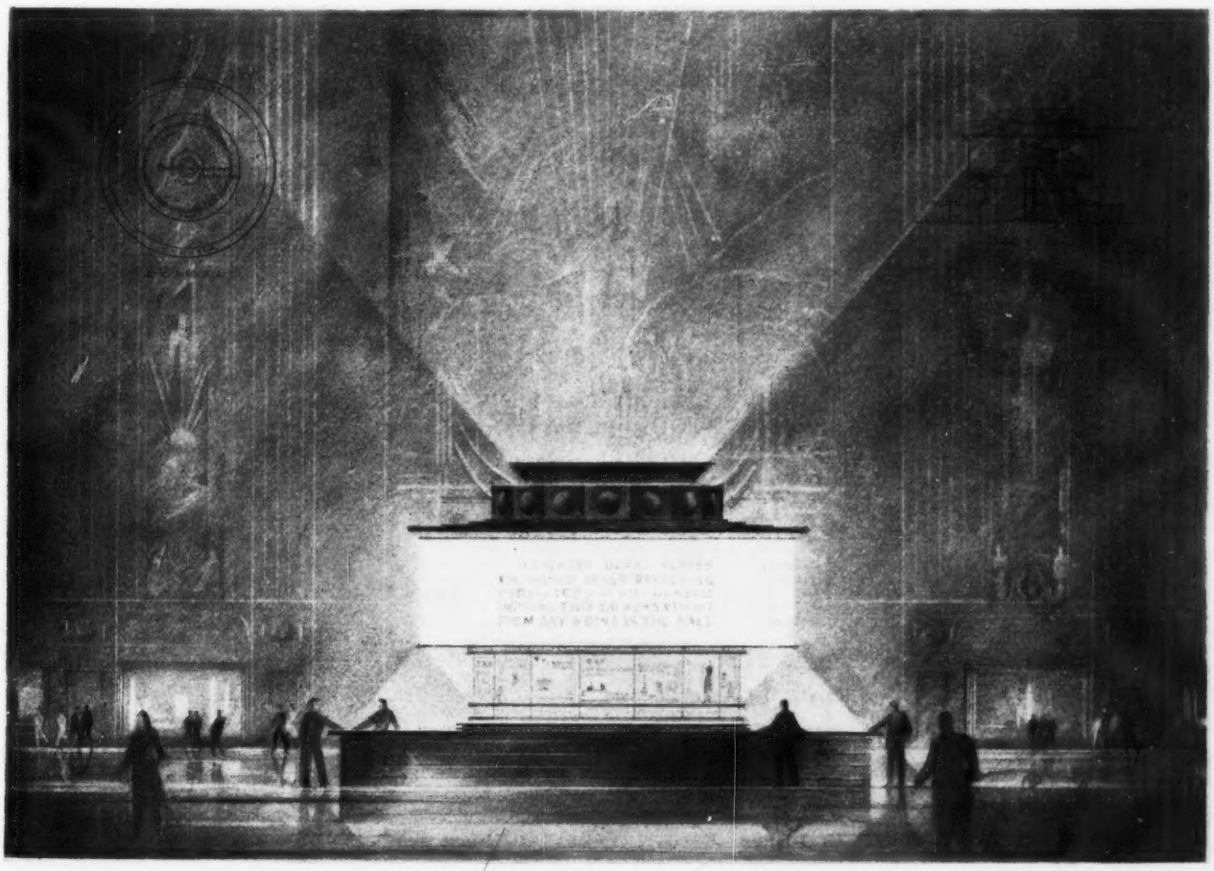

FIRST PRIZE DESIGN FOR "AN INFORMATION BOOTH FOR AN EXPOSITION HALL," BY WILLIAM JENSEN

COMPETITION CONDUCTED BY THE ARCHITECTS' EMERGENCY COMMITTEE OF NEW YORK

(See text on following page)

PRIZES AWARDED IN COMPETITION FOR INFORMATION BOOTH FOR AN EXPOSITION HALL

The Architects' Emergency Committee of the Region of New York has awarded prizes in a competition for unemployed architects and draftsmen as follows: First prize, seventy-five dollars, to William Jensen of Brooklyn, New York; second prize of fifty dollars to Morris D. Sornik of Brooklyn, New York; third prize of thirty-five dollars to Arthur Martini of Jersey City, New Jersey.

Prizes of twenty dollars each were awarded to: Louis L. Cinner, Ernest L. DuPree, Verner Walter Johnson, Elias L. Ruiz, R. Mitre, Lester Kintzing, Mitchell

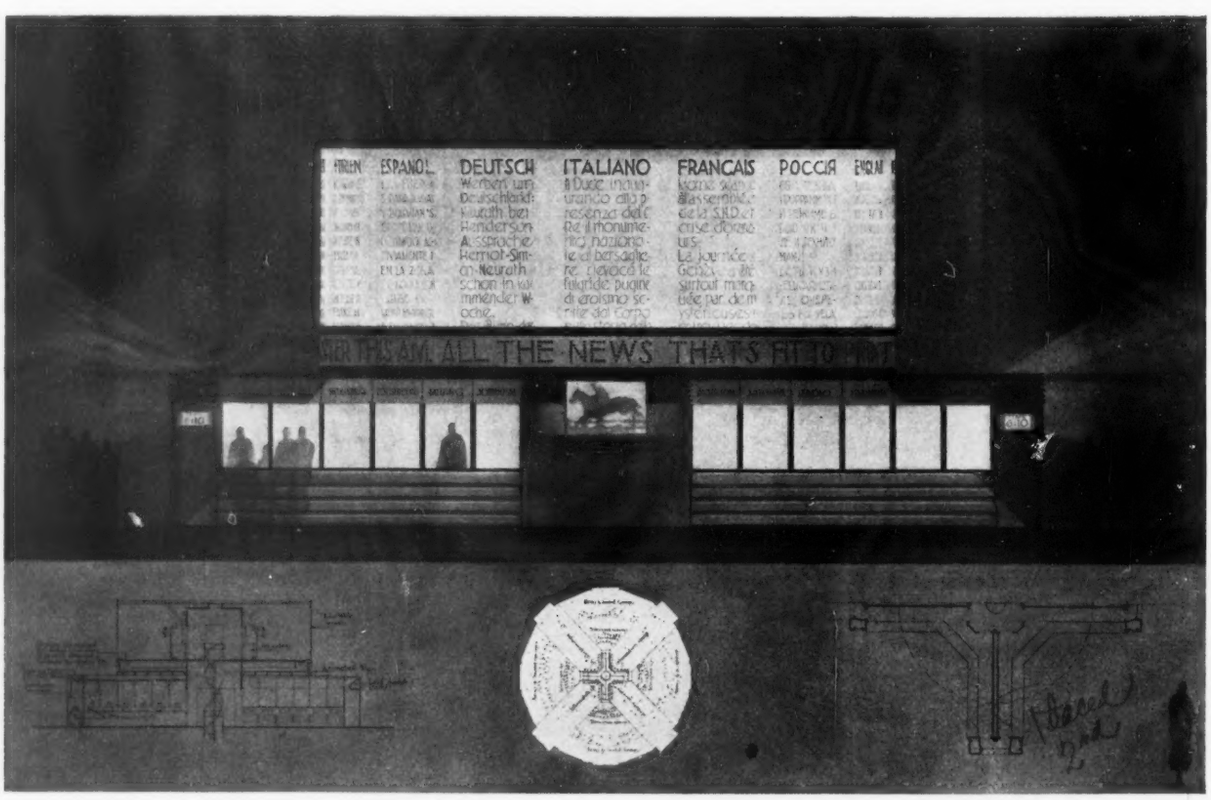

SECOND PRIZE DESIGN FOR "AN INFORMATION BOOTH FOR AN EXPOSITION HALL," BY MORRIS D. SORNIK

COMPETITION CONDUCTED BY THE ARCHITECTS' EMERGENCY COMMITTEE OF NEW YORK

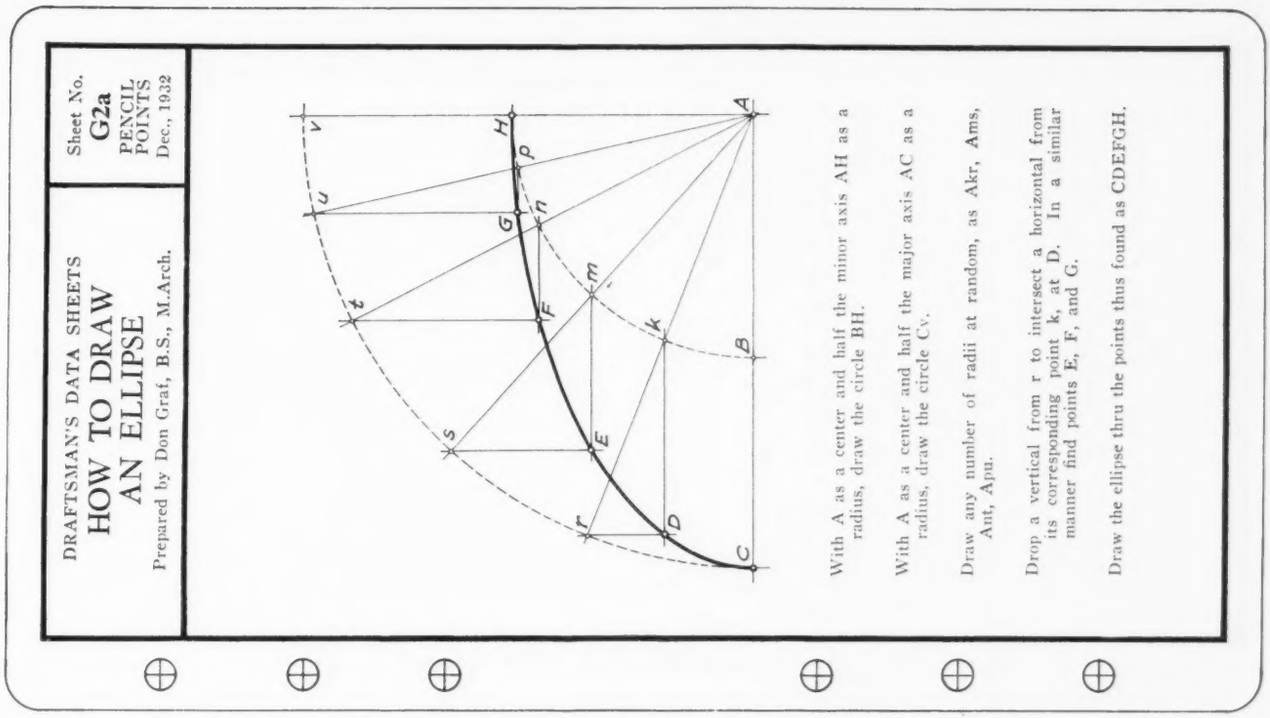
Sheet No. G2a
PENCIL POINTS Dec., 1932
DRAFTSMAN'S DATA SHEETS
HOW TO DRAW AN ELLIPSE
Prepared by Don Graf, B.S., M.Arch.
With A as a center and half the minor axis AH as a radius, draw the circle BH.
With A as a center and half the major axis AC as a radius, draw the circle Cv.
Draw any number of radii at random, as Akr, Ams, Ant, Apu.
Drop a vertical from r to intersect a horizontal from its corresponding point k, at D. In a similar manner find points E, F, and G.
Draw the ellipse thru the points thus found as CDEFGH.

DATA SHEET NO. G2a. *It is not always easy to make a smooth curve of a constructed five-centered arch. The above method of drawing an ellipse is much quicker, and is adaptable to any span or rise equally well.*

Wooten, all of New York; Emiel S. Padvy, Sol Greneman, Robert I. Hillier, Benjamin Goodrich, of Brooklyn; Arthur A. Hoefler, Jr., Bayport, Long Island; Phil Birnbaum, Wavecrest, Long Island, and Edwin Ross Clark, Freeport, Long Island.

The program stated that: A large News Syndicate combined with the Administration of a Great Exposition of International Importance has been assigned the space in the center of the Great Hall of the Main Building through which the Exposition is entered. This space shall be so arranged and decorated that it shall serve — 1. General Information for all matters pertaining to the Exposition. 2. Distribution of News of all natures. The Great Hall has a clear floor space of about 25,000 square feet and the space allotted to this Information and News Booth shall be not more than 1,000 square feet.

The Jury of Award consisted of Frederic C. Hirons, Chairman; Joseph Urban, Edward S. Hewitt, John Van Pelt, Lawrence Bottomley, and Arthur Loomis Harmon. The report of the Jury stated that:

"The designs submitted in this competition displayed a great deal of merit. In the opinion of the jury those that developed frankly a counter for the distribution of information, combined with movies, illuminated news information and the lighting of the main hall presented the best solutions."

The three prize drawings are reproduced herewith.

THIRD PRIZE DESIGN FOR "AN INFORMATION BOOTH FOR AN EXPOSITION HALL," BY ARTHUR MARTINI

COMPETITION CONDUCTED BY THE ARCHITECTS' EMERGENCY COMMITTEE OF NEW YORK

INDEX FOR THE MONOGRAPH SERIES

The title page and cross index for Volume XVII and XVIII of *The Monograph Series* will be mailed to subscribers of record for the year 1931-32 upon request. Please address Russell F. Whitehead, 148 East 61st Street, New York. The Monograph of Volume XVII, combined with the six numbers published in PENCIL POINTS during 1932, makes the ninth book in the series on Early American architecture.

WOMEN'S ARCHITECTURAL CLUB OF CHICAGO

MARY ANN CRAWFORD

At the recent annual meeting of the Women's Architectural Club of Chicago, Mary Ann Crawford, who was graduated from the Massachusetts Institute of Technology two years ago, was elected president. Elizabeth Kimball Nedved, former president, was elected vice-president. Margaret Fairman was named recording secretary, Aileen Anderson, corresponding secretary, and Mabel Wheelock, treasurer.

There are two meetings of the Club each month, a work meeting devoted to competitions among the members and preparation for the Club's annual exhibition, and a program meeting at which prominent speakers are presented. The Club is also introducing an associate membership designed for women interested in architecture who would not otherwise be qualified for membership in the Club.

AWARDS IN SMALL HOUSE COMPETITION

Awards in the Sixth Annual Small House Competition conducted by *House Beautiful* have been announced. The drawings were judged by Eliot T. Putnam, A.I.A., and Gordon Allen, A.I.A., both of Boston, and Ethel B. Power, Editor of the magazine.

Class I—Houses East of the Mississippi: 1st Prize—Harvey Stevenson, Thomas & Studds, New York; 2nd Prize—S. Merrell Clement, New York; 3rd Prize—Hunter McDonnell, New York; Honorable Mention—Barber & McMurry, Knoxville, Tennessee; Douglas Orr, New Haven, Connecticut (2); Kenneth W. Dalzell, East Orange, New Jersey.

Class II—Houses West of the Mississippi: 1st Prize—Roland E. Coate, Los Angeles; 2nd Prize—Austen Pierpont, Ojai, California; 3rd Prize—Palmer Sabin, Pasadena; Honorable Mention—Ralph C. Flewelling, Beverly Hills; Palmer Sabin, Pasadena.

Class III—Best House East or West of the Mississippi costing less than $10,000: Special Prize—Robert E. Sherlock, New York; Honorable Mention—Philip S. Avery, Boston; William I. Garren, San Francisco; Albert J. Schroeder, Beverly Hills.

Architects from twenty-five different states and one from Hawaii contributed to this competition, with California and New York submitting the largest number of entries and carrying off the highest honors in their respective classes.

ON STEEL AND CONCRETE

The Architectural Review, published by the Architectural Press, 9 Queen Anne's Gate, London, has published a double number for the November issue dealing with the subjects of concrete and steel. Among the important articles which have been written expressly for this issue are contributions by Sir Edwin Lutyens, Sir E. Owen Williams, Wells Coates, and C. J. Kavanagh, Secretary of the British Steelwork Association. P. Morton Shand writes on the history of steel and concrete, Walter Goodesmith on the evolution of design, and F. R. S. Yorke on the facings of steel and concrete buildings. The magazine is profusely illustrated and contains more than 200 photographs of steel and concrete construction from all parts of the world, including examples of domestic architecture, factories, dams, hotels, power stations, roads, bridges, railways, and transportation of every sort. To those of our readers that are interested in the subjects of steel and concrete, we strongly advise sending five shillings to the publishers for a copy of this special issue of *The Architectural Review*.

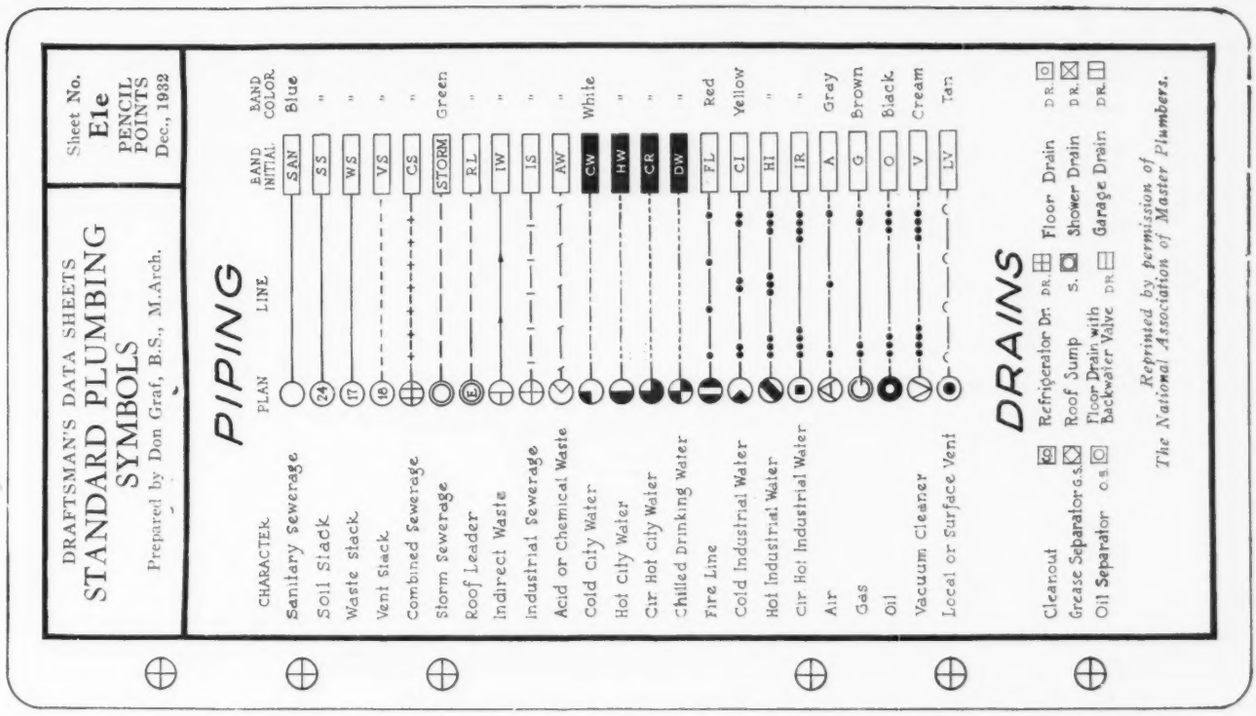
DRAFTSMAN'S DATA SHEETS
STANDARD PLUMBING SYMBOLS
Prepared by Don Graf, B.S., M.Arch.
Sheet No. E1e
PENCIL POINTS Dec., 1932
PIPING
CHARACTER
PLAN
LINE
BAND INITIAL
BAND COLOR
Sanitary Sewerage SAN Blue
Soil Stack SS "
Waste Stack WS "
Vent Stack VS "
Combined Sewerage CS "
Storm Sewerage STORM Green
Roof Leader RL "
Indirect Waste IW "
Industrial Sewerage IS "
Acid or Chemical Waste AW "
Cold City Water CW White
Hot City Water HW "
Cir Hot City Water CR "
Chilled Drinking Water DW "
Fire Line FL Red
Cold Industrial Water CI Yellow
Hot Industrial Water HI "
Cir Hot Industrial Water IR "
Air A Gray
Gas G Brown
Oil O Black
Vacuum Cleaner V Cream
Local or Surface Vent LV Tan
DRAINS
Cleanout
Refrigerator Dr. DR. Floor Drain DR.
Grease Separator G.S.
Roof Sump S. Shower Drain DR.
Oil Separator O.S.
Floor Drain with Backwater Valve DR. Garage Drain DR.
Reprinted by permission of The National Association of Master Plumbers.

DATA SHEET NO. E1e. *A number of Data Sheet-ers have suggested the Plumbing Symbols, so here they are! The standard electric symbols will appear in a coming number.*

ARCHITECTURAL SKETCH CLUB OF CHICAGO

The Architectural Sketch Club of Chicago started its fall activities with a talk by Eugene Klaber on the subject of "Faddism vs. Reality." Mr. Klaber brought out the fact that things which may look nice on paper are sometimes when actually built far from being what the designer had thought his work would be. Irving K. Pond delivered a lecture to the members on the subject, "Is Modern Architecture Modern?" Mr. Pond's talk was followed with an exhibition of water colors and sketches by Albert J. De Long, the winner of the Club Scholarship last year.

The Architects' Ball held at the Drake Hotel was a great success. The boys arrived late and went home early. The entertainment was in charge of Ralph Gross and the members are all anxiously looking forward to the Club's next party.

The members of Atelier Adams-Nelson are working hard. Frank E. Polito won a first prize in the Plywood competition; Evald A. Young won first prize in the Illuminating Engineering Society's competition; and George D. Recher has been awarded a second medal on the summer problem for "A Palace for an Exiled Monarch."

The officers for the coming year are: Louis Pirola, President; Francis Baldwin, Vice President; Thomas J. Mulig, Secretary; and William Thomsen, Treasurer.

SAN FRANCISCO ARCHITECTURAL CLUB

The San Francisco Architectural Club now holds a more important place than ever before, not only as a Club, but as a school as well. The courses in Architecture and Engineering given by the Club are recognized by the Universities. The Club is financially sound, and maintains large modern quarters in the heart of the city and is frequented by the members all hours of the day and night as well. Business meetings are held each month in our own quarters.

Approaching the end of the year, we are looking forward to two events of importance, the annual initiation and the annual celebration. The initiation, to be held at the next meeting with some thirty candidates on record, shows signs of a great evening for everyone. The annual celebration climaxes the season and judging from the program in store and the many weeks of preparation, it will be every bit as fine as the four-act play given in 1931. However, something different this year, and we entitle it "A Country Dance," but that isn't all. Wait 'til we tell you the rest! The hall will represent the interior of a barn with nothing omitted, and a courtyard approach—and if you think the

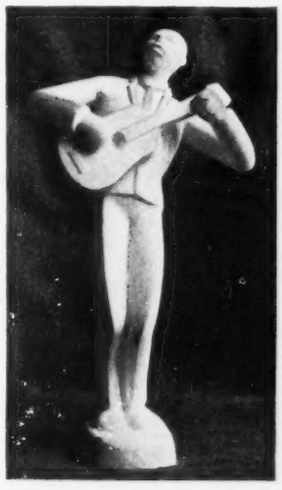

"GUITAR"

"ACCORDION"

FIGURES BY LOUISE CROSS, SCULPTOR

Size of originals, 14" high

Atelier boys can't paint scenery! A seven-piece orchestra will blare away and as suddenly as each dance ends, a snappy number will appear on the floor, and altogether with our master of ceremonies at the microphone, a good cabaret won't have a chance. This affair is to be held in our own clubrooms and is limited to one hundred couples. The next issue of our monthly bulletin, "S.F.A.C. Meditation," will enlighten the boys a bit more and, all in all, we would advise building up your energies towards this much looked for even, the annual celebration of S.F.A.C.

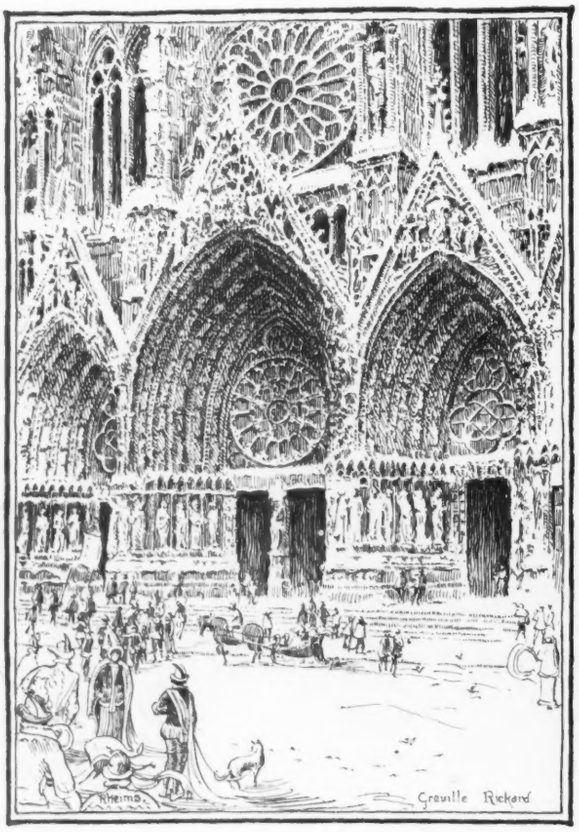

BY GREVILLE RICKARD

BY MATTHEWS M. SIMPSON

PEN-AND-INK DRAWINGS MADE TO BE USED FOR CHRISTMAS CARDS

HERE AND THERE AND THIS AND THAT

CONDUCTED BY E.L.C.

This department conducts four competitions each month. A prize of $10.00 is awarded in each class as follows: Class 1, sketches or drawings in any medium; Class 2, poetry; Class 3, cartoons; Class 4, miscellaneous items not coming under the above headings. Everyone is eligible to enter material in any of these four divisions. Good Wrinkle Section: a prize of $10.00 is awarded for any suggestion as to how work in the drafting room may be facilitated. No matter how simple the scheme, if you have found it of help in making your work easier, send it in. Competitions close the fifteenth of each month so that contributions for a forthcoming issue must be received by the twelfth of the month preceding the publication date in order to be eligible for that month's competitions. Material received after the closing date is entered in the following month's competition.

The publishers reserve the right to publish any of the material, other than the prize winners, at any time, unless specifically requested not to do so by the contributor.

THE PRIZES this month have been awarded as follows:

Class I—A. A. McGrath, New Haven, Conn.

Class II—Sherman G. Coates, Philadelphia.

Class III—No award.

Class IV—Joe Wertz, New York.

Good Wrinkle—William Fielding, Wellington, N. Z.

Don't forget our Christmas card competition. All entries submitted must be original designs, but each competitor may send in as many entries as he wishes, before January 12th, please!

Here's the prize Good Wrinkle this month, from William Fielding of New Zealand: "Tightly stretching large sheets of paper without a quick-drying hydraulic adhesive is often found to be difficult and to take up a considerable amount of valuable time. It can be done easily and quickly. Here's how:—Turn up the edges and thoroughly soak one side of the paper (including the edges). Apply paste or gum to the underside of the margins and place the paper on the drawing board. The secret lies in the next move. Iron the edges with a hot iron and you will find that they adhere to the board immediately. It is advisable to place some rags over the edges before ironing, or else the paste squeezed out will stick to the iron."

SALVADOR GLOOP, although for some days maintaining a discreet and disgruntled reticence as to the results of the recent election, was persuaded to loosen up and give us a statement just as we went to press. "I was the victim of a dastardly plot," said he. "Although I made many speeches from my powerful broadcasting studio which would have turned the tide overwhelmingly in favor of the Gloop Ticket, I later discovered that some ruffians in the employ of the rival parties had broken in and substituted an old rubber boot for my super-hetero microphone. This changed my wave length so that my message could be received only by voters with crystal sets.

"Otherwise, I had everything in my favor. Besides possessing the necessary double o in my name, I had a platform that could not be beat. It called for compulsory beer drinking by all prohibitionists, the abolition of left-hand turns, and a Government post office in every backyard of this broad country of ours.

"That I got not less than two votes in the face of the difficulties of making a silent campaign effective, makes it obvious that, had my story gotten across, I would have swept the country and very possibly the city as well."

"COTSWOLD COTTAGE"—FROM A PEN-AND-INK DRAWING BY A. A. MCGRATH

(PRIZE—*Class One—November Competition*)

"A Residence of Unusual Design"

We had a letter from our friend, Joe Wertz, of Le Brun Scholarship fame, which we print herewith, together with reproductions of the snapshots sent to us!

Our Mutual Friend

"I passed a very handsome estate the other day and, glimpsing a residence of unusual design, drove in. I found the owner at home and to my astonishment it was none other than an esteemed mutual friend of ours. It seems he has taken upon himself a new and constructive hobby and being—for the moment—unemployed, he elected to construct this novel and unique domicile which had drawn my admiring attention. Like most architects fortunate enough to possess them he has found it expedient to turn to his estate for sustenance and occupation, and his new home is constructed entirely from its natural resources. Incidentally he finds the life of Country Gentleman highly agreeable. With his kind permission I was fortunate in acquiring photographs both of himself and of his house, the first of the latter, I believe, to be taken. He has even graciously consented that I allow you to publish them in order that his out of town friends may see to what ingenious advantage he has been employing his leisure hours.

"May we all be heartened by this illustration of how impotent is the depression against such a person as the redoubtable Mr. Salvador Gloop."

Sincerely,

Joe Wertz.

ME AND MR. ROOSEVELT

(Apologies to Messrs. Gallagher and Shean)

By Sherman G. Coates

(Prize—*Class Two—November Competition*)

"Oh Mr. Roosevelt, oh Mr. Roosevelt!"
"Oh good morning! How is business, Mr. Coates?"
"It is bad and getting worse,
And the reason for this verse
Is to ask what cheer your victory denotes."
"Oh Mr. Coates, oh Mr. Coates,
Since I won with twenty-seven million votes,
Have you really any doubt
That I know what I'm about?"
"Then you guarantee prosperity?"
"Absolutely, Mr. Coates!"

"Oh Mr. Roosevelt, oh Mr. Roosevelt,
Can you give us architects a little work?
We're all broke or badly bent,
So can you as president
Send a little ray of sunshine through the murk?"
"Oh Mr. Coates, oh Mr. Coates,
For depressions I've got lots of antidotes.
Right away I'll give you beer,
And if you're a bonuseer
You may get two hundred dollars—
Won't that help you, Mr. Coates?"

"Oh Mr. Roosevelt, oh Mr. Roosevelt,
It is business that we want, not petty doles!
Can you satisfy the banks
That they owe ten thousand thanks
For your overwhelming victory at the polls?"
"Oh Mr. Coates, oh Mr. Coates,
When my glorious Democratic Party floats
Fiat money by the ton
Don't you see that every one
Will have pockets fatly bulging
With two hundred dollar notes?"

"Oh Mr. Roosevelt, oh Mr. Roosevelt,
All we want is architectural work to do.
Will your taxes and your teriffs
Set us free from haunting sheriffs?
Four or five good jobs a year would see us through."
"Oh Mr. Coates, oh Mr. Coates,
You know a change of leadership promotes
Better times than were before,
So stop feeling sick and sore!"
"I'm still doubtful, Mr. Roosevelt!"
"I should worry, Mr. Coates!"

"Wot about 'aving this 'ere plumb line tested, mate?"
(From "Help Yourself!" Annual)

THE SPECIFICATION DESK

Or Equal as Approved

Or Who Gets the Order

By H. R. Dowswell*, A. I. A.

The late Thomas Edison was said to have posted this quotation from Sir Joshua Reynolds on the walls of his plants—

"*There is no expedient to which a man will not resort to avoid the real labor of thinking.*"

The Architect or Engineer who first faced the problem of establishing a standard for manufactured products avoided the real labor of thinking by specifying the product of his favorite manufacturer and then adding "or equal as approved." Since then producers have been seeking the answer to "who gets the order—and how."

The use of this phrase in specifications is, in part, responsible for one of the major ills of the building and manufacturing industries, because "or equal as approved" is a direct invitation to the buyer to seek the lowest priced product the market affords and then offer it as the equal of the product mentioned in the specification, or failing to secure approval, shop the price of an acceptable product to a lower level.

Competitive bidding has been firmly established as an accepted means of determining the buying price of commodities, whether such commodities are entire buildings, the labor required for their erection, or the manufactured products entering into their construction and equipment —but, is it logical to invite Builders and Contractors for the various trade divisions or Producers to submit proposals for the construction of a building or parts of it, or manufactured products without first establishing a real basis of comparison?

Why should a conscientious Builder, Contractor or Manufacturer be placed at a disadvantage because a less conscientious competitor is willing to base his bid on products of inferior quality and take a chance under the "or equal" clause? Is there any sound reason why bidders should not be judged on the basis of quality, integrity, and their ability and reputation to render service?

These are questions, gentlemen, which I am sure you have asked many times. They are likewise questions to which we, in our office, have for years sought answers.

Let us briefly analyze the organization of a building operation.

First, we have the Architect or Engineer, or combinations of them. What have they to sell? *Service*—presumably based on technical knowledge, experience, and judgment.

Second, the Builder or General Contractor. What does he sell? The services of an organization trained to supervise, direct and coordinate the various groups contributing to the completed structure.

Third, the Subcontractors for the various trade divisions. What have they to sell? A similar service but in a more limited field. And

Fourth, the Producer of manufactured products.

The Architect and Engineer should have technical knowledge and experience necessary to set up through drawings and specifications the standard required for various parts of the work.

Where work is executed entirely in the field this is done, but have you ever seen a specification which after setting forth the proportions and strength of concrete required added "or equal as approved"? Why? Because the materials and processes are standardized and the execution can be supervised so as to judge the work in process and on the final product.

This is not possible with most manufactured products since they are produced in widely separated plants, in accordance with standards of design and quality determined by the manufacturers and vary according to the manufacturer's conception of what will satisfy the market. Economical production prohibits the manufacture of each individual product to a special design, and if it did not, Architects and Engineers do not and cannot possess the detailed knowledge necessary to produce such designs.

The General Contractor and the Subcontractors are alike to the extent that their chief stock in trade is their ability to organize, direct, and efficiently execute the work delegated to them. They depend, however, upon the manufacturer for the finished products entering into the structure, and unless the proposals submitted by the Contractor are set up to show the relative price of their services, there can be no fair basis of comparison.

How can this be done?

I will tell you how we have sought to do it and I believe with fairness to all parties.

If we are calling for general proposals, we issue invitations to a carefully selected list of General Contractors, or if the General Contractor has been chosen by direct selection we, in conference with the selected Contractor, set up lists of sub-bidders chosen for their ability and integrity in the respective fields.

This procedure, we believe, establishes fair competition, provided—and this is vital—their proposals are set up so as to be truly comparative. We believe that this can only be accomplished by requiring each bidder to base his bid on the same products. We therefore require each bidder to base his proposal on furnishing products of definite manufacturers. *(Continued on page 853)*

Mr. Dowswell, of the organization of Shreve, Lamb & Harmon, delivered this talk at the Ninth Semiannual Meeting of the Producers' Council.

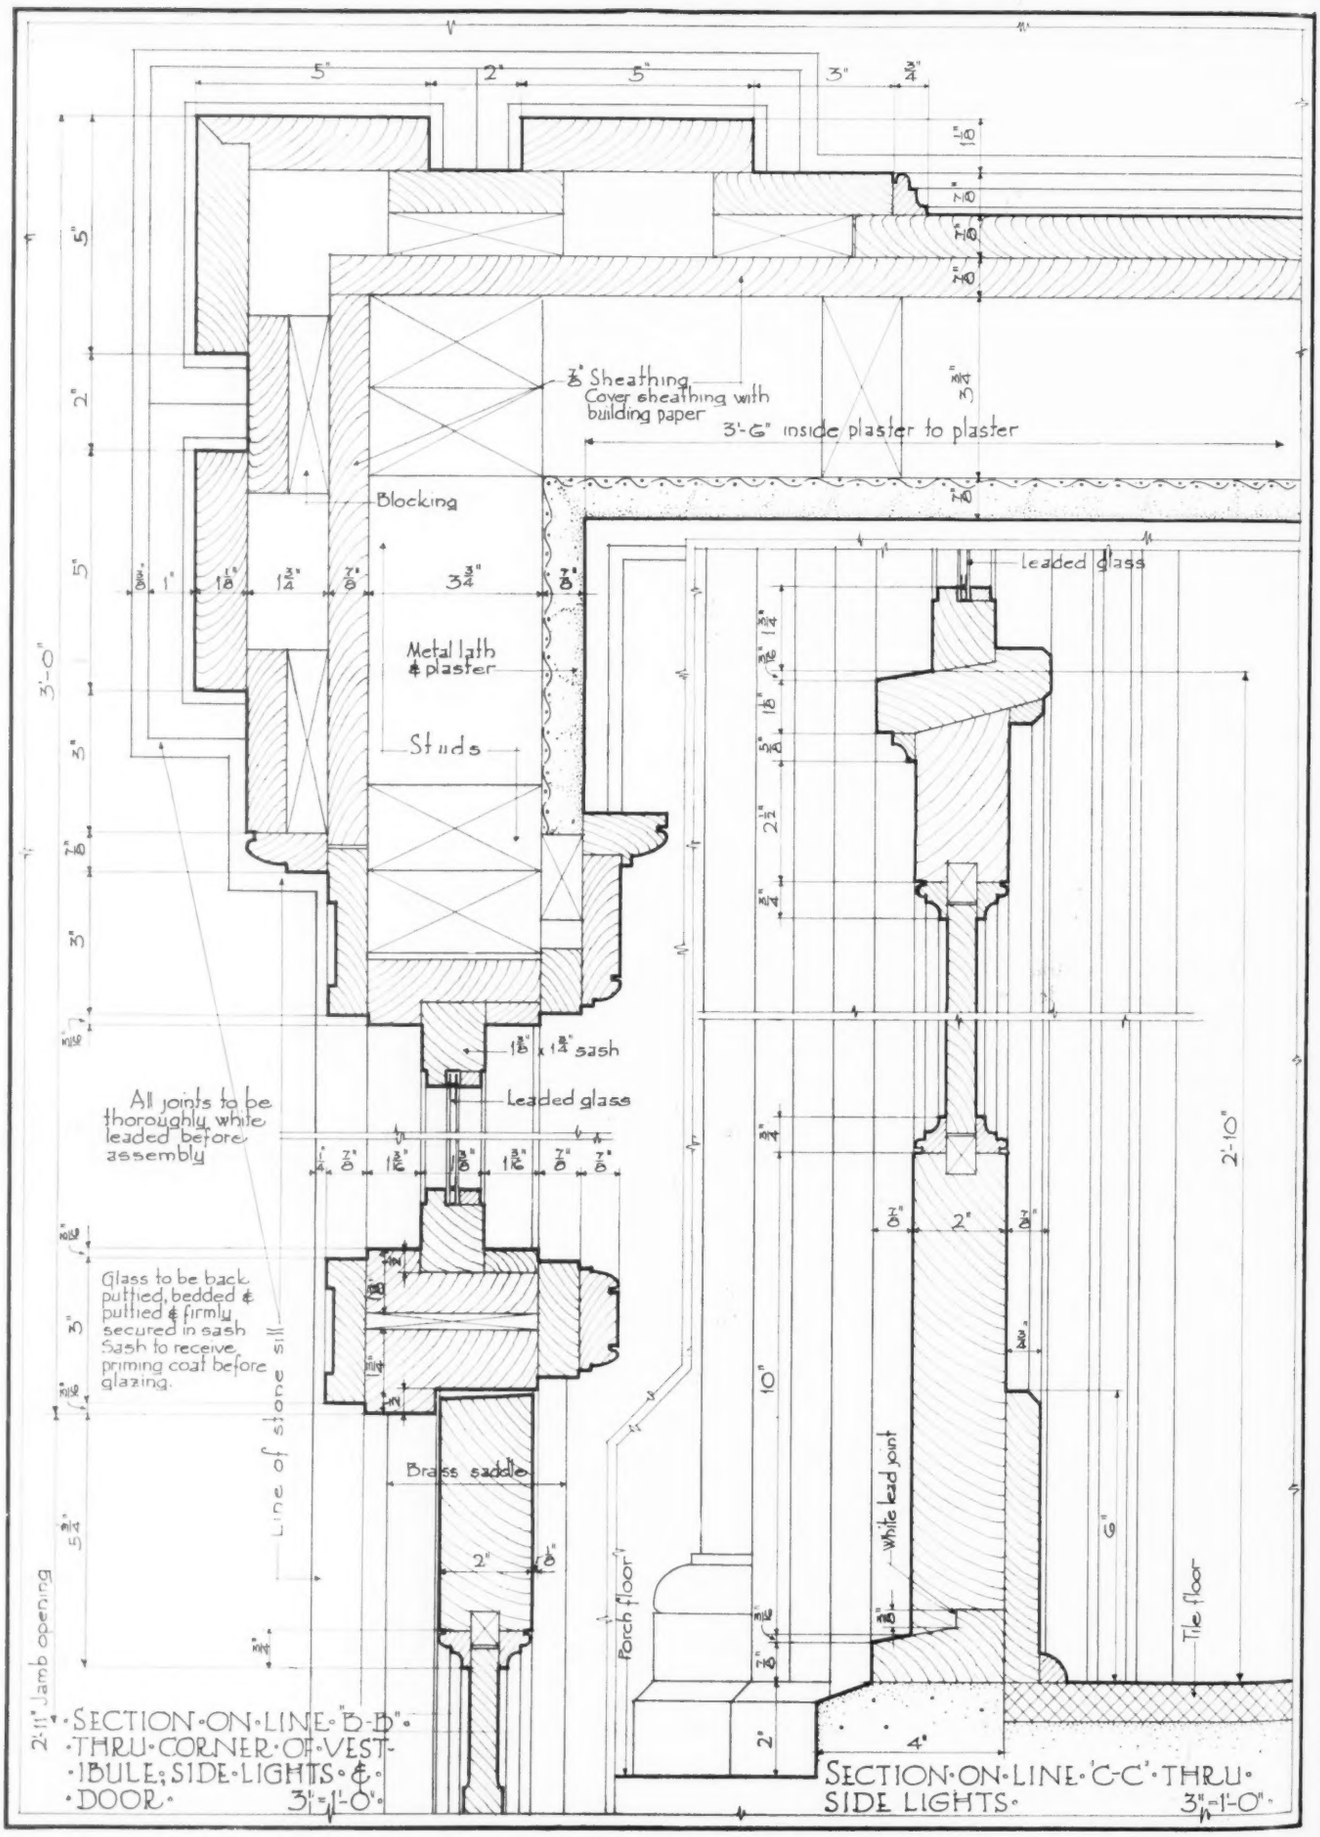
Blocking
Metal lath & plaster
Studs
Leaded glass
All joints to be thoroughly white leaded before assembly
Glass to be back puttied, bedded & puttied & firmly secured in sash. Sash to receive priming coat before glazing.
Line of stone sill
Brass saddle
2'-11" Jamb opening
3'-0"
SECTION ON LINE "B-B" THRU CORNER OF VESTIBULE SIDE LIGHTS & DOOR 3"=1'-0"
3/8" Sheathing
Cover sheathing with building paper
3'-6" inside plaster to plaster
1 3/8" x 1 3/4" sash
Leaded glass
2'-10"
White lead joint
Porch floor
Tile floor
SECTION ON LINE "C-C" THRU SIDE LIGHTS 3"=1'-0"

PLATE II—DETAILS OF OUTSIDE VESTIBULE AND PORTICO—DRAWN BY PHILIP G. KNOBLOCH

(The elevation of this plate was shown last month. Pediment and pier details will be presented in the next issue.)

OR EQUAL AS APPROVED

A closed specification you say. No—for we go further. We have developed a carefully worked clause which reads as follows:

"Estimates are desired on the following products. In each case bidders shall base their proposals on furnishing and installing the product numbered 1, stating additions or deductions for substituting, subject to the architect's selection, the other products listed."

The list is made sufficiently comprehensive to give each reputable manufacturer an opportunity to submit quotations.

Now let us sit in at the opening of bids. Remember that each bid is based on furnishing exactly the same manufactured products, therefore, unless the manufacturer quotes different prices to different contractors, the variation in bids will show the relative value of the services the Contractors have to offer.

If, because of credit standing or other similar reasons, producers have quoted more favorable prices to some of the contractors, we have no quarrel. That is undoubtedly the result of "good will" earned and they are entitled to any advantages accruing from it.

Our selection of the Contractor is made without reference to the additions or deductions quoted, unless the bids are so close that a consideration of these variations changes their relative standing.

The manufactured products are then considered on these relative merits and price, in conference with the Owner, Consulting Engineers and General Contractor.

The Owner is interested because it is his money we are spending and he frequently has business affiliations which he considers wise to recognize.

We have, however, succeeded in obtaining for the producer a fair and open consideration of his product.

We endeavor to place before the Owner the relative merits of the different products, not neglecting the matter of service—but in the end "he pays his money and takes his choice," and the Contractor's base bid is increased or reduced in accordance with the additions or deductions quoted.

Have we accomplished anything? Manufacturers have told us during the five years we have followed this practice that we have established for them the opportunity they have been seeking, and insofar as our work is concerned, removed that bug-bear "or equal as approved."

What have we done about shopping or bid-peddling, you ask? What more can we do?

Gentlemen—I must place the evils of bid-peddling in your own lap—that is where it belongs.

When you have convinced the buyer that your first price is your final price, then there will be no more peddling of bids, but as long as the buyer knows that in your eagerness to secure the order you are willing to modify your original quotation—not once but several times—just so long will "bids be peddled." The evil is of your own making and the solution rests in your own hands.

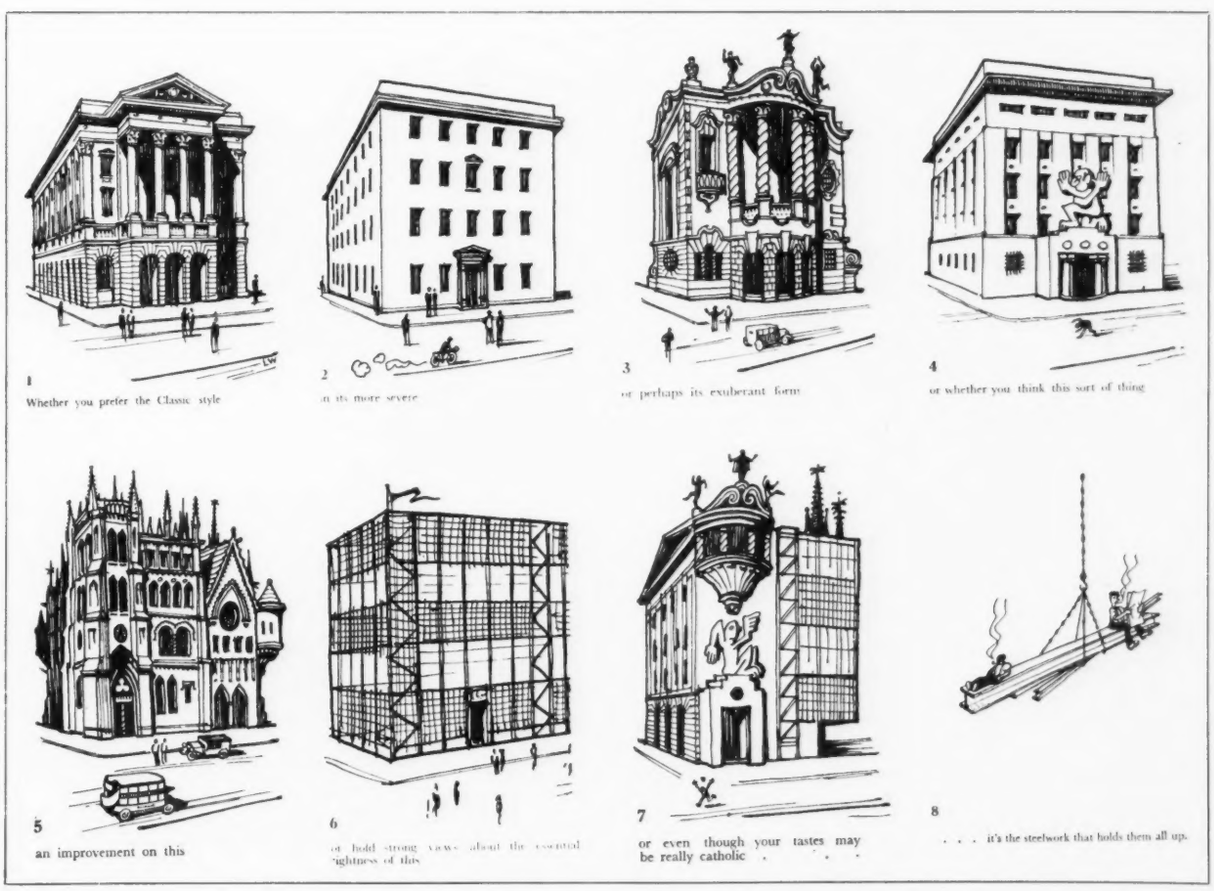

"It's Not the Clothes that Make the Gentleman"

Reprinted from "The Architectural Review" for November, 1932, from a pamphlet published by the British Steelwork Association.

PENCIL POINTS

Index to Volume XIII, January to December, Inclusive, 1932

ACH, David M.—*Article*, "Some Sketches of Old Rothenburg"—A Discussion of the Work of Otto Bierhals ..... April, 235
"Acoustical Treatment of the United States Naval Academy Chapel, The," *by Robert Lindahl* ..... Oct., 709
ALBRIZIO, C. A.—*Charcoal drawing*, "Piazza Del Popolo, Rome" ..... Nov., 737
ALLEN, George H.—*Article*, "Misadventures of a Draftsman,"
6.—Caravan to Mecca ..... Jan., 41
7.—I Open an Office ..... Feb., 115
Alphabet of Initials, Decorative, *by Ezra C. Stiles* ..... Jan., 16—18
ALPHA RHO CHI Delegates to the Annual Convention, held at the Ohio State University—*Group photograph* ..... Feb., 129
ALT, Harold L.—*Article*, "Modern Heating Methods" ..... Dec., 819
"Alteration Job, An Unusual," *by Samuel R. T. Very* ..... April, 219
AMERICAN Academy in Rome—Collaborative Problem of the Alumni Association for 1932 *Results and winning design* ..... April, 286—287
A.I.A., *Group photograph of new officers and directors of the* ..... July, 502
ANDERSON, Robert L.—*Article*, "Dogmatic Functionalism—A Reply to Mr. Howe" ..... July, 505
"Anderson, In Reply to Mr.," *by Henry S. Churchill* ..... Sept., 625
ANDRÉ, Albert—*Pencil drawing*, "Renoir" ..... Nov., 769
Appomattox Monument Competition—*Results and winning design* ..... March, 279—281
"Approach to Design, The," *by Albert Kahn* ..... May, 299
"Architect and the Grand Plan, The," *by Francis S. Swales,*
4.—Replanning of the First Modern City—Imperial Rome ..... Jan., 21
5.—Replanning of the First Modern City—Imperial Rome ..... April, 229
6.—The Architect's Status and the Development of Rome ..... Aug., 525
"Architect Answer This One? Can Some," *by Roland A. Yaeger* ..... Oct., 702
"Architect, To Be an Ideal," *by William Adams Delano* ..... Feb., 105
"Architect—What of the Future? The Young," *by John C. Hegeman* ..... Jan., 3
"Architect Who Went After Business—and Got It, An," *by R. W. Sexton* ..... Dec., 802
"Architect's Hobby, An," *by J. Frank Collins* April, 273
ARCHITECTS' LEAGUE OF NORTHERN NEW JERSEY—*Letter regarding Architects' Small House Service Bureau* ..... Jan., 61
ARCHITECTS' SMALL HOUSE SERVICE BUREAU—*Reprint from "The Blue Print" of discussion concerning the affiliation of the American Institute of Architects with the Architects' Small House Service Bureau* ..... March, 196
Additional discussion of above subject ..... April, 282
"Architecture, Art or Science?", *by Louis La Beaume* ..... Oct., 655
"Architectural Creed, My," *by William Adams Delano* ..... March, 145
"Architectural Guild of Small Home Design, The," *by Albert Martin* ..... Nov., 753
"Architectural Problem, How I Approach an," *by Irving K. Pond* ..... July, 459
ARNESEN, Ragnar L.—*Pencil sketch*, "Michigan Avenue, Dearborn, Michigan" ..... July, 489
ARNOLD, James Irza—*Pen and ink drawing*, "A Street in Jerusalem" ..... Jan., 19
Pen and ink drawing, "A Brick and Wood Farmhouse at Gordon, New York" ..... Aug., 534
ARRANTS, Edward B.—*Two water color sketches*, made while abroad as holder of the Rice Institute Traveling Scholarship ..... Nov., 773
BAHR, Howard Edward—*Biographical sketch* ..... July, 499
BAILEY, Vernon Howe—*Water color drawing*, "Living Room in the Residence of Cornelius N. Bliss, Esq.," *Color plate, Frontispiece* ..... July
Water color drawing, "An Interior in the Galleries of French and Company, Inc." July, 475
"Bank Vaults," *by David B. Emerson* ..... Sept., 649
BAUM, Dwight James—*Article*, "This Modernism" ..... Sept., 597
BEATY-POWNALL, William—*Two measured drawings*, A Doorway from a Farm near Tours, France
A Doorway in Venice ..... July, 473—474
Bierhals, A Discussion of the Work of Otto, "Some Sketches of Old Rothenburg," *by David M. Ach* ..... April, 235
Two charcoal and opaque water colors, "Hegereiter Haus" and "Burg Tor," Rothenburg, Bavaria, *Color plates* ..... April, 237—239
BILL, Carroll—*Water color sketch*, "Church in Mexico," *Color plate, Frontispiece* ..... Aug.
Water color sketch, "On the Road in Connecticut," *Color plate, Frontispiece* ..... Nov.
"Bird in the Bush, A," *by Hubert M. Garriott* Oct., 671
Booth Fellowship in Architecture—*Results and winning design* ..... June, 439
BORN, Ernest—*Drawing*, "Preliminary study, United States Post Office and Federal Court House, Chattanooga, Tennessee," R. H. Hunt Company, Architects, Shreve, Lamb, and Harmon, Consulting Architects ..... Jan., 4
BOUCHER COMPANY, H. E.—*Eight views of model of new Newark Station of the Pennsylvania Railroad*, McKim, Mead, and White, Architects ..... Feb., 118—121
BOUTRON, Felix—*Opaque and transparent water color*, "Bazar Exotique," *Color plate* ..... Feb., 91
BOYD, D. Knickerbacker—*Article*, "Popularizing the Profession with the Public and with Itself" Jan., 45
BRADFORD, Francis Scott—*Pencil drawing*, "Figure Study," *Plate* ..... Feb., 107
Drawing in brown ink and pencil, "Head of a Girl," *Plate* ..... March, 183
Bridge Design Competition, held by the American Institute of Steel Construction—*Results* June, 437
BRIGGS, Cecil C.—*Etching and aquatint*, "Interior of the Roman Bath at Tripoli," *Plate* ..... Jan., 33
BROUT, Robert Benedict—*Biographical sketch* July, 501
BROWN, Frank Chouteau—*Article*, "Some Records of Old Concord," *The Monograph Series* May, 331—346
BROWN, Glenn—*Obituary* ..... May, 369
Brown Traveling Scholarship—*Results and winning designs* ..... June, 432—435
"Building Industry, Trends of the," *by Rolland J. Hamilton* ..... Dec., 837
"Built-in Equipment, Planning for," *by Arthur Bates Lincoln* ..... March, 159
CARPENTER, J. E. R.—*Obituary* ..... July, 496
CASTLE, Sydney E.—*Article*, "An Architect's Notes on Pen Drawing,"
4. ..... Jan., 9
5. ..... Feb., 97
6. ..... April, 245
7. ..... June, 403
8. ..... Aug., 535
9. ..... Dec., 791
CECERE, Gaetano—Design for Columbia Broadcasting System Radio Medal ..... May, 357

INDEX TO VOLUME XIII

CHAMBERLAIN, Samuel—*Drypoint*,
"Beauvais," *Plate* ... March, 185
Article, "The Sketches and Woodcuts of Charles Hallo" ... Sept., 601
"Charcoal 'Smooch' Technique, The," *by Walter K. Smith* ... March, 163
Chart for Computing Time, *by R. Newton Mayall, Landscape Architect* ... Oct., 716
Chicago Architectural Sketch Club Scholarship—*Results and winning design* ... July, 500—501
CHICAGO TECH ARCHITECTURAL CLUB—*Group photograph showing members at smoker* ... April, 281
Group photograph showing members at the World's Fair Grounds ... July, 499
Christmas Cards, Suggestions for ... Nov., 776; Dec., 848
CHRYSTIE, E. P.—*Two pencil sketches*,
"St. Thomas' Church"
"Fifth Avenue in the Thirties" ... Jan., 42
Charcoal drawing, "Steps of the Sub-Treasury Building, New York" ... Aug., 520
CHURCH, Eugene B.—*Article*, "A Study of the Economic Height and Cost of Buildings" ... March, 169
Article, "Some Fallacies of Obsolescence" July, 487
CHURCHILL, Henry S.—*Article*, "In Reply to Mr. Anderson" ... Sept., 625
CLARK, Kenneth—*Photograph*, "Mount Vernon" ... Feb., 104
CLARK, Laurence—*Water color*, "Southwest Harbor, Maine" ... Sept., 644
CLARKE, Fred W.—Reply to article, "Can Some Architect Answer This One?", *by Roland A. Yaeger* ... Nov., 775
"Client's Money, Playing Safe on the," *by W. Fred Dolke, Jr.* ... April, 277
CLINGERMAN, Robert L.—*Article*, "Steel Windows for Penal Institutions" ... May, 349
CLUTE, Eugene—*Article*, "Designing for Construction in Glass," Part I ... Nov., 741
COLLINS, J. Frank—*Article*, "An Architect's Hobby" ... April, 273
COLLINS, William, Sculptor—*Design for medal presented to Kenneth M. Murchison* ... May, 368

COLOR PLATES BY—

BAILEY, Vernon Howe—*Water color drawing*, "Living Room in the Residence of Cornelius N. Bliss, Esq.," *Frontispiece* ... July
Water color drawing, "An Interior in the Galleries of French and Company, Inc." ... July, 475
BIERHALS, Otto—*Two charcoal and opaque water colors*, "Hegereiter Haus" and "Burg Tor," Rothenburg, Bavaria ... April, 237—239
BILL, Carroll—*Water color sketch*, "Church in Mexico," *Frontispiece* ... Aug.
Water color sketch, "On the Road in Connecticut," *Frontispiece* ... Nov.
BOUTRON, Felix—*Opaque and transparent water color*, "Bazar Exotique" ... Feb., 91
HÉBRARD, Jean—*Pastel drawing*, "Temple of Baalbec, Syria" ... Feb., 81
KIRBY, Henry P.—*Oil painting*, "Imaginary Composition," *Frontispiece* ... Oct.
McCRACKIN, Otho—*Rendering in transparent and opaque water color*, "High School, Lyons, Kansas," Mann and Company, Architects, *Frontispiece* ... March
Rendering in pencil and water color, "Trinity Methodist Episcopal Church, Hutchinson, Kansas," Mann and Company, Architects ... March, 153
McDONALD, Edward Dixon—*Water color drawing*, "Cleveland Terminal Tower at Night," *Frontispiece* ... June
ROBB, E. Donald—*Oil painting*, "Ambulatory of a French Cathedral That Never Was Built," *Frontispiece* ... Dec.
SIMPSON, Lusby—*Water color rendering*, "Inland Terminal Number One for the Port of New York Authority," Abbott, Merkt, and Company, Engineer-Architect ... May, 347

COLOR PLATES BY—(Continued)

STONE, Edward D.—*Pastel rendering*, "Preliminary Sketch for Roxy Theatre at Rockefeller Center, New York," *Frontispiece* ... Sept.
SWALES, Francis S.—*Two water colors*, "Portions of Project for Development of East River Front, Manhattan Island"—Regional Plan of New York ... Jan., 35—37
WITTON, Frederick R.—*Pastel drawing*, "Sketch for a Proposed Educational Group on the Bank of a River," McLaughlin and Burr, Architects, *Frontispiece* ... May
YEWELL, J. Floyd—*Water color drawing*, "Residence for Mr. and Mrs. Wm. S. Barstow, Great Neck, L. I.," Greville Rickard, Architect ... June, 423
"Come-back, The"—*A Reply to Roland A. Yaeger by an Ex-Draftsman* ... Dec., 836
COMPARATIVE DETAILS—*Group 1*—
"Dormers," *Drawings by Paul F. Zeidler from architects' data* ... Oct., 695—701
Group 2—"Fences and Gates," *Drawings by Franklin Dominick from architects' data* Nov., 757—763
Group 3—"Details of Radiator Enclosures," *Drawings by Paul F. Zeidler from architects' data* ... Dec., 829—835

COMPETITIONS—

American Academy in Rome—Collaborative Problem of the Alumni Association for 1932—*Results and winning design* ... April, 286—287
Appomattox Monument Competition—*Results and winning design* ... March, 279—281
Booth Fellowship in Architecture—*Results and winning design* ... June, 439
Bridge Design Competition, held by the American Institute of Steel Construction—*Results* ... June, 437
Brown Traveling Scholarship—*Results and winning designs* ... June, 432—435
Chicago Architectural Sketch Club Scholarship—*Results and winning design* ... July, 500—501
Council of Registered Architects, New York State, Competition for the design of a membership certificate in the—*Results and winning design* ... Feb., 126
Douglas Fir Plywood Competition for Interior Plans—*Results and winning design* Oct., 715
Emerson Prize Competition—*Results* ... March, 199
Foch, Competition for design for proposed development of a Plaza of Marshal—*Winning design* ... Aug., 594
Harrodsburg, Kentucky, Monument Competition—*Results and winning designs* ... Feb., 122—125
Additional designs ... March, 191—192
Illuminating Engineering Society Competition—*Results* ... July, 497
Information Booth for an Exposition Hall, Competition conducted by the Architects' Emergency Committee of New York for an—*Results and winning designs* ... Dec., 843—845
Institution in the Department of Correction of the State of New York, Competition for a New—*Winning design* ... Sept., 633—636
Le Brun Traveling Scholarship—*Results and winning designs* ... May, 358—365
Massachusetts Institute of Technology Special Student Scholarships—*Results and winning designs* ... Aug., 586—587
Matcham Traveling Fellowship of Yale University—*Results and winning design* ... Sept., 641—642
McKim Fellowship in Architecture—*Results and winning design* ... July, 498—499
Mills, Competition for a Memorial to Robert—*Results and winning design* ... Aug., 588
Milton B. Medary Scholarship—*Results* ... Aug., 586
New York University Scholarship—*Results* ... Sept., 640
Paris Prize for 1932—*Results and winning designs* ... Aug., 571—580
Plym Fellowship in Architecture—*Results and winning design* ... June, 440—441
Princeton-Yale Intercollegiate Competition in Architecture—*Results and winning designs* Jan., 60
Princeton Prizes in Architecture for 1932—*Results and winning designs* ... Aug., 583—584

COMPETITIONS—(Continued)

Radio Cabinet Design Competition—*Results* Sept., 637
Rome Prize in Architecture—*Results and winning designs* June, 428—431
Rome Prize in Landscape Architecture—*Results* June, 429
Winning design July, 497
Rotch Traveling Scholarship—*Results* June, 438
Small House Competition, held by The Architects' Emergency Committee—*Results* March, 200
Winning designs April, 288—289
Small House Competition conducted by *House Beautiful*—*Results* Dec., 846
Stewardson Memorial Scholarship—*Results and winning design* Oct., 712
Woodman Scholarship in Architecture—*Results* July, 503

COMPETITIONS, ANNOUNCEMENTS OF

Art Competitions, Six, conducted by *The Artist* Oct., 718
Bridge Design Competition, held by the American Institute of Steel Construction Feb., May, 127, 373
Brown Traveling Scholarship Jan., 58
Douglas Fir Plywood Competition for Interior Plans March, 195
House Beautiful Cover Competition Feb., 126
Howard Fellowship, John Galen Sept., 640
Kelley Fellowship in Architecture, James Templeton Dec., 842
Kinley Memorial Fellowship Aug., 585
Le Brun Traveling Scholarship Dec., 841
Massachusetts Institute of Technology Special Student Scholarships April, 281
Mellon Institute Fellowships (ad section) Feb., 40
New York University Graduate Scholarship June, 445
Princeton Prizes in Architecture March, 201
Rome Prize in Architecture, Landscape Architecture, Painting, Sculpture, and Musical Composition Dec., 841
Rotch Traveling Scholarship March, 199
Small House Architectural Competition, conducted by Better Homes in America Oct., 718
Small Sculpture Competition, Ninth Annual Nov., 765
"Concord, Some Records of Old," *Monograph Series, by Frank Chouteau Brown* May, 331—346

CONSTRUCTION DETAILS

BEATY-POWNALL, William—Details of construction for a doorway from a farm near Tours, France, and for a doorway in Venice July, 473—474
KNOBLOCH, Philip G., Architect—Details of construction for kitchen for a church school Feb., 133
Additional details of construction for church school kitchen March, 203
Details of construction for bronze entrance doors with revolving door unit, Plate I May, 366
Details of construction for bronze entrance doors with revolving door unit, Plate II June, 436
Plate III July, 512
Details of construction for porch Aug., 590
Details of construction for a projected steel window Sept., 648
Details of construction for a bay window with steel sash in half timber construction Oct., 722
Details of construction for an outside vestibule and portico, Plate I Nov., 780
Plate II Dec., 852
LAWRENCE, Carol—Details of construction for sections of garden walls July, 454
Details of construction for garden steps, St. Catherine's Court, Bath, England July, 494
Details of construction for sea-wall and windbreak fence, estate of Mr. and Mrs. T. G. Buckley Nov., 764—765
LELAND and COMPANY, Architects and Engineers, J. D.—Details of construction of ornament and marquise for Worcester Pressed Steel Company's Office Building Jan., 66—68

CONSTRUCTION DETAILS (Continued)

O'DELL, H. Augustus, and Wirt C. Rowland, Associate Architects—Details of shopfront for Dewitt Taylor Estate, Detroit July, 508
ROWLEY AND ASSOCIATES, Architects, Charles Bacon—Details of construction for application of porcelain enamel shingles to porcelain enamel house at Cleveland, Ohio Sept., 637—652
SMITH, JR., Robert, Architect—Details of construction for frameless steel house at Solon, Ohio, built by the Insulated Steel Company of Cleveland, Ohio, and the American Rolling Mill Company of Middletown, Ohio Oct., 714
SOURIAN, Zareh M.—Details of construction for rug display Nov., 782
Details of construction for anti-cyclone revolving door May, 380

CONTEMPORARY ARCHITECTURAL DESIGN, Series of articles on the *PHILOSOPHY OF*

Baum, Dwight James, "This Modernism" Sept., 597
Cram, Ralph Adams, "Have I a 'Philosophy of Design'?" Nov., 729
Delano, William Adams, "My Architectural Creed" March, 145
Fellheimer, Alfred, "Contemporary Design in Architecture" June, 383
Howe, George, "Functional Aesthetics and the Social Ideal" April, 215
Hunt, Myron, Brief comment May, 301
Kahn, Albert, "The Approach to Design" May, 299
La Beaume, Louis, "Architecture, Art or Science?" Oct., 655
Lamb, William F., "Heads vs. 'Isms'" Aug., 519
Pond, Irving K., "How I Approach an Architectural Problem" July, 459
Walker, C. Howard, "Functionalism and Architecture" Dec., 787

CONTEMPORARY ARCHITECTURAL DESIGN, PHILOSOPHY OF. Two letters in discussion of series of articles on, *by John Thomas Grisdale and G. Evans Mitchell* June, 442
Article, "Dogmatic Functionalism—A Reply to Mr. Howe," *by Robert L. Anderson* July, 505
"Contemporary Architecture, Further Thoughts on," *by William Adams Delano* July, 467
"Contemporary Design in Architecture," *by Alfred Fellheimer* June, 383
CORYELL, Irving—*Article*, "A Draftsman Goes to Europe and Brings Back Some Facts" May, 327
Council of Registered Architects, New York State, Competition for the design of a membership certificate in the—*Results and winning design* Feb., 126
CRABTREE, Walter P., Architect—Rendering and plan for farm group for proposed Fairfield State Hospital at Newtown, Connecticut March, 210
CRAM, Ralph Adams—*Article*, "Have I a 'Philosophy of Design'?" Nov., 729
CRAWFORD, Mary Ann—*Photograph* Dec., 846
CROSS, Louise—*Two sculptured figures*, "Guitar" —"Accordion" Dec., 847
CUNNINGHAM, Cornelia—*Pencil sketch*, "An Old Savannah Kitchen" Jan., 7
CURTIS, R. E.—*Lithograph*, "The Sydney Harbor Bridge, December, 1930" March, 162
"Daxian, My," *by William Adams Delano* Nov., 735
DELANO, William Adams—*Talk given before the Junior League of the New York Society of Architects*, "To Be an Ideal Architect" Feb., 105
Article, "My Architectural Creed" March, 145
Article, "Further Thoughts on Contemporary Architecture" July, 467
Design for a Government office building for a metropolis July, 507
Poem, "My Daxian" Nov., 735
Delano and Aldrich Scholarship, Announcement of Oct., 711
DE POSTELS, Theodore—*Crayon and pastel drawing*, "Custom House, New York," *Plate Lithograph*, "The First Savings Bank in the World—Dumfrieshire, Scotland" Jan., Dec., 29, 828

INDEX TO VOLUME XIII

DETLIE, John Stewart—*Biographical sketch* .. Oct., 713

DICKINSON, Page L.—*Article*, "Some Old Sundials" ..... Oct., 673

DOBSON, William T.—*Article*, "Engineering Studies for a Country Estate" ..... Sept., 627

DOLKE, JR., W. Fred—*Article*, "Playing Safe on the Client's Money" ..... April, 277

DOMINICK, Franklin—*Comparative details*, "Fences and Gates" ..... Nov., 757—763

"Doorways in New England, Early Interior," *Monograph Series, by Arthur C. Haskell* .... Oct., 679—694

DOPPEL, H. B.—*Drypoint*, "Sunlight in a Canyon" ..... Nov., 749

Dormers, Comparative details of, *Drawings by Paul F. Zeidler from architects' data* ..... Oct., 695—701

Douglas Fir Plywood Competition—*Results and winning design* ..... Oct., 715

DOWSWELL, H. R.—*Article*, "Or Equal as Approved" ..... Dec., 851

DRAFTSMAN'S DATA SHEETS, *by Don Graf*

Contents ..... Jan., 55
Orientation Chart ..... Jan., 56
1931 Motor Car Dimensions ..... Jan., 57
Capacity of Tanks ..... Jan., 57
Hand and Bevel of Doors ..... Feb., 130
1930 Motor Car Dimensions ..... Feb., 131
Heights for 2¾″ Brick Courses ..... Feb., 132
Dormers in Wood Framing ..... Feb., 135
Heights for 3″ Brick Courses ..... March, 199
1929 Motor Car Dimensions ..... March, 200
Standards for Softwood Flooring ..... March, 201
Double Bed Hotel Room ..... March, 202
Standard Sizes of Clay Flue Linings ..... April, 283
Septic Tank Sewage Disposal ..... April, 284
Entasis of Columns ..... April, 285
Heights for 2½″ Brick Courses ..... April, 286
Septic Tank Sewage Disposal ..... May, 367
Tennis Courts ..... May, 370
Heights for 3¼″ Brick Courses ..... May, 371
Sizes of Pianos ..... May, 373
Heights for 2⅝″ Brick Courses ..... June, 437
Septic Tank Sewage Disposal ..... June, 439
Mutuled Doric Order ..... June, 443
Gravity Type Retaining Wall ..... June, 445
Heights for 2⅞″ Brick Courses ..... July, 496
Standard Dimensions of Softwood Lumber ..... July, 501
Septic Tank Sewage Disposal ..... July, 503
Determination of Roof Leaders ..... July, 505
Dimensioning Pitfalls ..... Aug., 581
Joints in Terra Cotta Washes ..... Aug., 583
1932 Motor Car Dimensions ..... Aug., 585
Horseshoe Courts Official Standard ..... Aug., 587
Standard Sizes of Partition Tile ..... Sept., 637
Heights for 3⅛″ Brick Courses ..... Sept., 640
Decimals of a Foot ..... Sept., 642
Wattage of Electric Outlets ..... Sept., 644
Decimals of an Inch ..... Oct., 706
Circular Arcs, Chords, and Segments ..... Oct., 711
Standard Sizes of Side Construction Tile ..... Oct., 713
Size of Fireplace Flues ..... Oct., 717
Solid One-Way R. C. Slab Table ..... Nov., 765
Stock Wood Door Patterns ..... Nov., 767
Standard Sizes of End Construction Tile ..... Nov., 769
Spell It Right ..... Nov., 771
Solution of Right Triangles ..... Dec., 841
Uncoursed Stonework ..... Dec., 843
How to Draw an Ellipse ..... Dec., 845
Standard Plumbing Symbols ..... Dec., 847

"Draftsman Goes to Europe and Brings Back Some Facts, A," *by Irving Coryell* ..... May, 327

DRAKE, William A.—*Etching*, "The White Mill, Belgium" ..... April

DUNN, Donald Omar—*Obituary* ..... Aug., 581

"Economic Height and Cost of Buildings, A Study of the," *by Eugene B. Church* ..... March, 169

EDMINSTER, C. Franklin—*Obituary* ..... March, 198

ELY, John H.—*Obituary* ..... May, 369

EMBURY, II, Aymar—*Article*, "Roofs," *Monograph Series* ..... April, 249—264

EMERSON, David B.—*Article*,
"Building Stone," Part II ..... Jan., 69
Part III ..... Feb., 139
"Decorative Stone,"
Part I ..... May, 378
Part II ..... June, 455
"Bank Vaults" ..... Sept., 649

Emerson Prize Competition—*Results* ..... March, 199

"Engineering Studies for a Country Estate," *by William T. Dobson* ..... Sept., 627

EVANS, David—*Portrait bust of Ely Jacques Kahn* ..... Jan., 59

"Ex-Draftsman, A Reply to Roland A. Yaeger by an"—"The Come-back" ..... Dec., 836

FAN, Robert, of Shanghai, China—*Photograph showing the members of the office of* ..... April, 278

"Farmhouses of Oley Valley, Berks County, Pennsylvania," *Monograph Series, by Dean Kennedy* ..... Aug., 539—554

FAWCETT, Waldon—*Article*, "Federal Studies of Store Interiors" ..... Nov., 770

FELDMAN, H. I.—*Article*, "An Architect's Appraisal of the Real Estate Situation" ..... April, 283

FELLHEIMER, Alfred—*Article*, "Contemporary Design in Architecture" ..... June, 383

Fences and Gates, Comparative details of, *Drawings by Franklin Dominick from architects' data* ..... Nov., 757—763

"Fences, Some Notes on," *by Arthur Bates Lincoln* ..... Nov., 756

FERRISS, Hugh—*Drawing*, "Skyscrapers of Steel and Glass" ..... March, 195

"Field for the Architect, A New," *by "Gargoyle"* ..... Jan., 5

Filling Station, A Center Road, Leland Hubbell Lyon, Architect ..... June, 450

FITTON, Hedley—*Drypoint*, "The Pantheon, Rome" ..... Aug., 527

FJELDE, Paul—Sculptured model for section of granite frieze for East Cambridge Savings Bank, East Cambridge, Mass. ..... May, 374
Bronze panel, "Building," for 75 Federal Street Building, Boston, Massachusetts, Thomas M. James Company, Architects Oct., 726

"Floor Construction, Comparing the Cost of Different Types of," *by H. Vandervoort Walsh and Alexander T. Saxe* ..... Aug., 555

Foch, Competition for design for proposed development of a Plaza of Marshal—*Winning design* ..... Aug., 594

FORTIER, E. A.—*Carbon pencil sketch*, "Carnegie Steel Company—Edgar Thomson Works" March, 212

FOSTER, John M.—*Lithograph*, "An Old House in Provincetown," *Plate* ..... Jan., 31

FRANKLIN, M. S.—*Article*, "Public Buildings of Salem, Massachusetts," Part Two, *Monograph Series* ..... June, 407—422

FREESE, Ernest Irving—*Article*, "The Geometry of Architectural Drafting," 20.—Circles at Right Angles ..... May, 315
21.—Organizing the Orthogonals ..... Aug., 561
22.—Some Short Cuts with the Triangles .. Dec., 793

FREESE'S CORNER—*Answers to problems in geometry or mathematics*, A Simple Tracery Layout and a "Brain Teaser" ..... Jan., 66
Trisection and Pythagoras ..... Feb., 131
Some Graphical Cyclometry ..... March, 205
Turning Another "Trick" with Perspective Projection ..... June, 447

"French Comrades in America, 4"—Jean Hébrard—*by Harry Sternfeld* ..... Feb., 75

FRONTISPIECES

BAILEY, Vernon Howe—*Water color drawing*, "Living Room in the Residence of Cornelius N. Bliss, Esq.," *Color plate* .... July
BILL, Carroll—*Water color sketch*, "Church in Mexico," *Color plate* ..... Aug.
Water color sketch, "On the Road in Connecticut," *Color plate* ..... Nov.
DRAKE, William A.—*Etching*, "The White Mill, Belgium" ..... April
KIRBY, Henry P.—*Oil painting*, "Imaginary Composition," *Color plate* ..... Oct.

FRONTISPIECES (Continued)

McCRACKIN, Otho—*Rendering in transparent and opaque water color*, "High School, Lyons, Kansas," Mann and Company, Architects, *Color plate* ... March
McDONALD, Edward Dixon—*Water color drawing*, "Cleveland Terminal Tower at Night," *Color plate* ... June
ROBB, E. Donald—*Oil painting*, "Ambulatory of a French Cathedral That Never was Built," *Color plate* ... Dec.
ROTH, Ernest—*Drypoint*, "The Square, Abbeville" ... Feb.
STONE, Edward D.—*Pastel rendering*, "Preliminary Sketch for Roxy Theatre at Rockefeller Center, New York," *Color plate* ... Sept.
WEBSTER, Herman—*Etching*, "The Tower" Jan.
WITTON, Frederick R.—*Pastel drawing*, "Sketch for a Proposed Educational Group on the Bank of a River," McLaughlin and Burr, Architects, *Color plate* ... May

"Functional Aesthetics and the Social Ideal," *by George Howe* ... April, 215
"Functionalism and Architecture," *by C. Howard Walker* ... Dec., 787
"Functionalism, Dogmatic—A Reply to Mr. Howe," *by Robert L. Anderson* ... July, 505
"Future, Fitness and Harmony, For the," *by William Ward Watkin* ... Feb., 73
GAGE, Merrill, Sculptor—*Design for Alpha Rho Chi Medal* ... May, 368
GARBER, Frederick W.—*Pencil sketch*, "Georgian Bay" ... May, 330
"GARGOYLE"—*Article*, "A New Field for the Architect" ... Jan., 5
GARRIOTT, Hubert M.—*Article*, "A Bird in the Bush" ... Oct., 671
"Geometry of Architectural Drafting, The," *by Ernest Irving Freese*, 20.—Circles at Right Angles ... May, 315
21.—Organizing the Orthogonals ... Aug., 561
22.—Some Short Cuts with the Triangles ... Dec., 793
"Gimcracks and Spizzerinktums"—*A letter from D. E. Hobelman to Frederick E. Sloan* ... March, 206
"Girders, T Flange," *by William Rice Pearsall* Sept., 631
"Glass, Designing for Construction in," *by Eugene Clute* ... Nov., 741
"Glass, Interior Marble, Slate, and Structural," *by Philip G. Knobloch* ... Aug., 591
GLUCKMAN, Maxfield E.—*Smooch drawing*, "Attica State Prison, Attica, N. Y." ... Aug., 523
GOLDSMITH, Goldwin—*Article*, "Why Scope of the Work?" ... March, 211
GONZALEZ, Guillermo—*Charcoal sketch*, "San Andres, Madrid" ... July, 466
Crayon sketch, "Genoa" ... Oct., 672
"Good Buildings," *by Edward D. Pierre* ... Aug., 521
GORA, Joseph Charles—*Biographical sketch* ... Aug., 585
Gothic Fragments Recently Installed in the City Art Museum, St. Louis, Missouri—*Four Photographs* ... May, 377
GRAF, Don—*Article*, "A *Vade Mecum* for Draftsmen" ... Jan., 55
Draftsman's Data Sheets, Contents ... Jan., 55
Orientation Chart ... Jan., 56
1931 Motor Car Dimensions ... Jan., 57
Capacity of Tanks ... Jan., 57
Hand and Bevel of Doors ... Feb., 130
1930 Motor Car Dimensions ... Feb., 131
Heights for 2¾" Brick Courses ... Feb., 132
Dormers in Wood Framing ... Feb., 135
Heights for 3" Brick Courses ... March, 199
1929 Motor Car Dimensions ... March, 200
Standards for Softwood Flooring ... March, 201
Double Bed Hotel Room ... March, 202
Standard Sizes of Clay Flue Linings ... April, 283
Septic Tank Sewage Disposal ... April, 284
Entasis of Columns ... April, 285
Heights for 2½" Brick Courses ... April, 286
Septic Tank Sewage Disposal ... May, 367
Tennis Courts ... May, 370
Heights for 3¼" Brick Courses ... May, 371
Sizes of Pianos ... May, 373

GRAF, Don *(Draftsman's Data Sheets, Cont.)*
Heights for 2⅝" Brick Courses ... June, 437
Septic Tank Sewage Disposal ... June, 439
Mutuled Doric Order ... June, 443
Gravity Type Retaining Wall ... June, 445
Heights for 2⅞" Brick Courses ... July, 496
Standard Dimensions of Softwood Lumber ... July, 501
Septic Tank Sewage Disposal ... July, 503
Determination of Roof Leaders ... July, 505
Dimensioning Pitfalls ... Aug., 581
Joints in Terra Cotta Washes ... Aug., 583
1932 Motor Car Dimensions ... Aug., 585
Horseshoe Courts Official Standard ... Aug., 587
Standard Sizes of Partition Tile ... Sept., 637
Heights for 3⅛" Brick Courses ... Sept., 640
Decimals of a Foot ... Sept., 642
Wattage of Electric Outlets ... Sept., 644
Decimals of an Inch ... Oct., 706
Circular Arcs, Chords, and Segments ... Oct., 711
Standard Sizes of Side Construction Tile Oct., 713
Size of Fireplace Flues ... Oct., 717
Solid One-Way R. C. Slab Table ... Nov., 765
Stock Wood Door Patterns ... Nov., 767
Standard Sizes of End Construction Tile Nov., 769
Spell It Right ... Nov., 771
Solution of Right Triangles ... Dec., 841
Uncoursed Stonework ... Dec., 843
How to Draw an Ellipse ... Dec., 845
Standard Plumbing Symbols ... Dec., 847

GRANELLI, Richard H.—*Biographical sketch* ... Aug., 573
GREENGARD, B. C.—*Lithograph*, "Marshall Field Building, Chicago," Graham, Anderson, Probst, and White, Architects ... Sept., 624
GRISDALE, John Thomas—Letter in discussion of series of articles on the Philosophy of Contemporary Architectural Design ... June, 442
GUILLONNET, O. D. V.—Three murals for the Wanamaker Men's Store in the new Lincoln-Liberty Building, Philadelphia, John T. Windrim, Architect ... Oct., 719
GUPTILL, Arthur L.—*Article*, "On the Use of Cutouts in Rendering" ... March, 167
"Hallo, The Sketches and Woodcuts of Charles," *by Samuel Chamberlain* ... Sept., 601
Woodcut, "The Towers of Senlis" ... Sept., 626
HAMILTON, Rolland J.—*A Talk to the Producers' Council at their Ninth Semiannual Meeting*, "Trends of the Building Industry" Dec., 837
"Handling the Entire Job," *by R. R. Houston* March, 193
HANSEN, Thomas Louis—*Biographical sketch* ... Oct., 711
HARRISS, H. H.—*Article*, "Provincialism vs. H. R. 6187" ... March, 188
Harrodsburg, Kentucky, Monument Competition —*Results and winning designs* ... Feb., 122—125
Additional designs ... March, 191—192
HASKELL, Arthur C.—*Article*, "Early Interior Doorways in New England," *Monograph Series* ... Oct., 679—694
HAY, Jr., James—*Article*, "George Washington, Architect" ... Feb., 102
"Heads vs. 'Isms'," *by William F. Lamb* ... Aug., 519
"Heating Methods, Modern," *by Harold L. Alt* Dec., 819
HÉBRARD, Jean—"French Comrades in America, 4," *by Harry Sternfeld* ... Feb., 75
Pastel drawing, "Temple of Baalbec, Syria," *Color plate* ... Feb., 81
HEGEMAN, John C.—*Article*, "The Young Architect—What of the Future?" ... Jan., 3
HEILBORN, Carl Westdahl—*Conté crayon drawing* ... May, 314
"Heilborn, Carl Westdahl, Delineator," *by Ellis F. Lawrence* ... June, 393
Black pastel sketch, "Grauman's Chinese Theatre, Hollywood, California" ... July, 481
Pencil sketch, "Mexican Village, Los Angeles" ... July, 482

HERE & THERE & THIS & THAT ..... Jan., 64— 65; Feb., 136—137; March, 207—209; April, 290—291; May, 375—377; June, 451—453; July, 509—511; Aug., 589; Sept., 646—647; Oct., 720—721; Nov., 776—779; Dec., 849—850

HIRONS, Frederic C.—*Two lithographic pencil drawings*, "Interior and Exterior of New Worcester Memorial Auditorium Building," L. W. Briggs Company and Frederic C. Hirons, Architects ..... Oct., 707—708

HITE, Morgan Dudley E.—*Article*, "The New Par—Intensive Conservation Comes to America" ..... July, 477

HODGES, M. O.—*Pencil drawing*, "Harris Farm, Marblehead, Massachusetts" ..... Nov., 755

HOLLIS, Barbara—*Pencil drawing*, "Villa D'Este" ..... Aug., 570

"H.R. 6187," Some Discussion of ..... March, 187
A letter concerning "H.R. 6187" ..... April, 292

Housing, Extracts from an Address on—"The Architect Suggests a New Technique," *by Robert D. Kohn* ..... May, 325

HOUSTON, R. R.—*Talk given before the Junior League of the New York Society of Architects*, "Handling the Entire Job" ..... March, 193

HOWE, George—*Article*, "Functional Aesthetics and the Social Ideal" ..... March, 215
Two models showing museum schemes for congested city area, Howe and Lescaze, Architects ..... Oct., 713

HUNT, Myron—Brief article in discussion of the Philosophy of Contemporary Architectural Design ..... May, 301

HUNTER, Leonard Le Grande—*Biographical sketch* ..... July, 503

IMREY, Ferenc—*Pencil sketch* ..... Jan., 51
Pencil sketch, "A Boatman of Malta" ..... Feb., 117
Group of pencil sketches, "Mioshinji Temple Gate in Kyoto"
"On a Street in Hommoku, a Suburb of Yokohama"
"Shinto Shrine in Gummyogi, Japan"
"Octagonal Temple in Nara, Japan"
"Enkakuji Temple Gate in Kamakura, Japan" ..... Sept., 614—618

INDIANAPOLIS ARCHITECTURAL CLUB—*Photograph showing members at twentieth anniversary dinner* ..... Feb., 141

Information Booth for an Exposition Hall, Competition conducted by the Architects' Emergency Committee of New York for an—*Results and winning designs* ..... Dec., 843—845

INGEMANN, Dorothy Brink—*Article*, "Shop Signs of Stockholm" ..... Sept., 619
Pen-and-ink sketch, "Shop Sign from Stockholm" ..... Oct., 676

"Inns and Taverns, New England," *Monograph Series, by Hubert G. Ripley* ..... Dec., 803—818

Institution in the Department of Correction of the State of New York, Competition for a New—*Winning design* ..... Sept., 633—636

"Insurance During Construction," *by R. P. Wallis* ..... Nov., 781

JACKMAN, F. L.—*Letter discussing American architecture* ..... June, 445

JACOBS, Harry Allan—*Obituary* ..... Sept., 643

JAQUET, ATELIER—*Group photograph* ..... Oct., 705

"Job During a Depression, How to Find a," *by Royal Barry Wills* ..... Jan., 13

JOHNSON, Ernst Vern—*Biographical sketch* ..... Sept., 641

JOHNSON, Otis F.—*Article*, "The Architect's Problems in Monolithic Concrete Construction" ..... July, 483

"K_2 H_4 O," *by Robert Niles, Jr.* ..... Oct., 677

KAHN, Albert—*Article*, "The Approach to Design" ..... May, 299

KAHN, Ely Jacques, portrait bust of, *by David Evans* ..... Jan., 59

KANARIK, Emery—*Article*, "Tradition" ..... Jan., 53

KENNEDY, Dean—*Article*, "Farmhouses of Oley Valley, Berks County, Pennsylvania," *Monograph Series* ..... Aug., 539—554

KIRBY, Henry P.—*Oil painting*, "Imaginary Composition," *Color plate, Frontispiece* ..... Oct.
"Henry P. Kirby—1853-1915," *by Francis S. Swales* ..... Oct., 657

KNOBLOCH, Philip G.—*Article*, "Whys and Wherefores of the Specification,"
12.—Metal Furring and Lathing ..... April, 293
13.—Tile Work ..... July, 513
14.—Interior Marble, Slate, and Structural Glass ..... Aug., 591
15.—Plastering ..... Oct., 723
Details of construction for kitchen for a church school ..... Feb., 133
Additional details of construction for church school kitchen ..... March, 203
Details of construction for bronze entrance doors with revolving door unit, Plate I ..... May, 366
Plate II ..... June, 436
Plate III ..... July, 512
Details of construction for porch ..... Aug., 590
Details of construction for a projected steel window ..... Sept., 648
Details of construction for a bay window with steel sash in half timber construction ..... Oct., 722
Details of construction for an outside vestibule and portico, Plate I ..... Nov., 780
Plate II ..... Dec., 852

KOHN, Robert D.—*Extracts from an address on housing*, "The Architect Suggests a New Technique" ..... May, 325

LA BEAUME, Louis—*Article*, "Architecture, Art or Science?" ..... Oct., 655

LAMB, William F.—*Article*, "Heads vs. 'Isms'" ..... Aug., 519

LAWRENCE, Carol H.—*Measured drawing*, Sections of garden walls ..... June, 454
Measured drawing, Details of garden steps, St. Catherine's Court, Bath, England ..... July, 494
Measured drawing and two photographs, Detail of a sea-wall and windbreak fence, Estate of Mr. and Mrs. T. G. Buckley ..... Nov., 764—765

LAWRENCE, Ellis F.—*Article*, "Carl Westdahl Heilborn, Delineator" ..... June, 393

Le Brun Traveling Scholarship—*Results and winning designs* ..... May, 358—365

LELAND & COMPANY, Architects and Engineers, J. D.—Details of construction of ornament and marquise for Worcester Pressed Steel Company's Office Building
Exterior view of same building ..... Jan., 66— 68

LEWIS, Ernest—*Pen-and-ink drawing*, "Tree Study" ..... Dec., 790

LEWIS, Schell—*Pencil rendering*, "United States Embassy, Paris, France," Delano and Aldrich, Architects ..... July, 468

LINCOLN, Arthur Bates—*Article*, "Planning for Built-in Equipment" ..... March, 159
Article, "Factors Frequently Overlooked in Planning Houses" ..... July, 469
Article, "A Plumbing System for the House" Sept., 621
Article, "Some Notes on Fences" ..... Nov., 756

LINDAHL, Robert—*Article*, "The Acoustical Treatment of the United States Naval Academy Chapel" ..... Oct., 709

Linoleum panel, John R. Thompson Company Restaurant, Indianapolis, Indiana, Benjamin R. Marshall Company, Architects, Chicago .. Nov., 768

LOCKLAND, Harry—*Pencil sketch*, "Old Flour Mill, Ellensburg, Washington" ..... Jan., 52

LOFTON, Melvyn—*Pencil drawing*, "Early Oregon Ranch Home" ..... May, 324

LOVEN, Carl K.—*Measured drawings rendered in tempera,* "Details of the Church of St. Michel D'Aiguilhe at Le Puy, France" .... Oct., 678

Pencil drawing, "Preliminary study for seventy-story office building, Rockefeller Center, New York" ..... Nov., 767

"Low Cost House, A Real," *by Royal Barry Wills* June, 391

LYON, Leland Hubbell—Photograph and plan of "A Center Road Filling Station" ..... June, 450

MACCHI, Charles L.—*Biographical sketch* .... Aug., 582

"Marble, Slate, and Structural Glass, Interior," *by Philip G. Knobloch* ..... Aug., 591

MARLIER, Raymond M.—*Pencil sketch,* "St. Peter's Church, Brownsville, Pennsylvania" . Sept., 632

MARTIN, Albert—*Article,* "The Architectural Guild of Small Home Design" ..... Nov., 753

Massachusetts Institute of Technology Special Student Scholarships—*Results and winning designs* ..... Aug., 586—587

MASSENA, G.—*Pencil drawing,* "Garden on the Estate of A. I. Du Pont, Esq.," Massena and Du Pont, Architects ..... Nov., 784

MASTERSON, Charles Thomas—*Biographical sketch* ..... June, 440

Matcham Traveling Fellowship of Yale University—*Results and winning design* ..... Sept., 641—642

MATTISON, Donald M.—*Oil painting,* "Summer," *Plate* ..... Feb., 111

MAYALL, R. Newton—Chart for computing the relations between apparent noon and mean time for the 75th meridian ..... Oct., 716

McCRACKIN, Otho—Silhouettes of American Draftsmen and Designers, VII, *by George W. Smith* ..... March, 147

Rendering in transparent and opaque water color, "High School, Lyons, Kansas," Mann and Company, Architects, *Color plate, Frontispiece* ..... March

Rendering in pencil and water color, "Trinity Methodist Episcopal Church, Hutchinson, Kansas," Mann and Company, Architects, *Color plate* ..... March, 153

McDONALD, Edward Dixon—*Water color drawing,* "Cleveland Terminal Tower at Night," *Color plate, Frontispiece* ..... June

McKim Fellowship in Architecture—*Results and winning design* ..... July, 498—499

McNULTY, William C.—*Drypoint,* "The Bridges, New York, 1930" ..... Nov., 751

Medary Scholarship, Milton B.—*Results* ..... Aug., 586

MELBOURNE UNIVERSITY ARCHITECTURAL ATELIER—*Group photograph showing members* (ad section) ..... Feb., 40

MEŠTROVIĆ, Ivan—*Study,* "Mother and Child," *Plate* ..... April, 267

"Metal Furring and Lathing," *by Philip G. Knobloch* ..... April, 293

Metal House, A New Type of Low Cost, Charles Bacon Rowley & Associates, Architects ..... Feb., 129

MEYER, Alvin—*Sculptured bronze door for the Ohio State Office Building* ..... April, 276

Mills, Competition for a Memorial to Robert—*Results and winning design* ..... Aug., 588

"Misadventures of a Draftsman," *by George H. Allen,* 6.—Caravan to Mecca Jan., 41
7.— I Open an Office ..... Feb., 115

MITCHELL, G. Evans—Letter in discussion of series of articles on the Philosophy of Contemporary Architectural Design ..... June, 442

MITCHELL, Rossel Edward—Reply to article, "Can Some Architect Answer This One?", *by Roland A. Yaeger* ..... Nov., 774

"Mode Horizontale, A la," *by William Williams* April, 271

Model of New Newark Station of the Pennsylvania Railroad—McKim, Mead, and White, Architects ..... Feb., 118

"Modernism, This," *by Dwight James Baum* .. Sept., 597

MONOGRAPH SERIES, THE,
Edited by Russell F. Whitehead

BROWN, Frank Chouteau—"Some Records of Old Concord" ..... May, 331—346

EMBURY, II, Aymar—"Roofs" ..... April, 249—264

FRANKLIN, M. S.—"Public Buildings of Salem, Massachusetts," Part Two ..... June, 407—422

HASKELL, Arthur C.—"Early Interior Doorways in New England" ..... Oct., 679—694

KENNEDY, Dean—"Farmhouses of Oley Valley, Berks County, Pennsylvania" ..... Aug., 539—554

RIPLEY, Hubert G.—"New England Inns and Taverns" ..... Dec., 803—818

"Monolithic Concrete Construction, The Architect's Problems in," *by Otis F. Johnson* .... July, 483

MUHLENBERG, Frederick A.—*Article,* "Upstate" ..... Sept., 611

MURPHY AND OLMSTED, Architects—*Group photograph showing members at Twentieth Anniversary Dinner* ..... Feb., 138

NELSON, George—*Biographical sketch* ..... June, 429

"New Par, The—Intensive Conservation Comes to America," *by Morgan Dudley E. Hite* .... July, 477

"New Technique, The Architect Suggests a"—*Extracts from an address on housing by Robert D. Kohn* ..... May, 325

New York University Scholarship—*Results* ..... Sept., 640

NILES, Robert—*Article,* "K_2 H_4 O" ..... Oct., 677

"Obsolescence, Some Fallacies of," *by Eugene B. Church* ..... July, 487

O'DELL, H. Augustus, and Wirt C. Rowland, Associate Architects—Details of shopfront for Dewitt Taylor Estate, Detroit ..... July, 508

OLTAR-JEVSKY, W. K.—Winning competition design for proposed development of a "Plaza of Marshal Foch" ..... Aug., 594

"Or Equal as Approved," *by H. R. Dowswell* .. Dec., 851

"Orange Juice Goes Modern," *by John Vassos* Sept., 645

OVERTURF, John—*Pencil rendering,* "House for Robert Dyer, Seattle, Washington," George Wellington Stoddard, Architect ..... July, 490

Paris Prize for 1932—*Results and winning designs* ..... Aug., 571—580

Patina on Copper in Twenty-four Hours, New Process for Developing—*Photograph showing apparatus* ..... Oct., 717

PEARSALL, William Rice—*Article,* "T-Flange Girders" ..... Sept., 631

"Pen Drawing, An Architect's Notes on," *by Sydney E. Castle,* 4 ..... Jan., 9
5 ..... Feb., 97
6 ..... April, 245
7 ..... June, 403
8 ..... Aug., 535
9 ..... Dec., 791

"Pennsylvania Railroad, New Newark Station of the," McKim, Mead, and White, Architects—*Eight views of model by H. E. Boucher Co.* ..... Feb., 118—121

"Philosophy of Design? Have I a," *by Ralph Adams Cram* ..... Nov., 729

PIERRE, Edward D.—*Article,* "Good Buildings" Aug., 521

PIROLA, Louis—*Lithograph pencil sketch,* "St. Sophia, Constantinople" ..... Nov., 734

"Planning Houses, Factors Frequently Overlooked in," *by Arthur Bates Lincoln* ..... July, 469

"Plastering," *by Philip G. Knobloch* ..... Aug., 591

PLASTOW, Charles—*Pen-and-ink drawing,* "The Bok Singing Tower" ..... March, 197

"Plumbing System for the House, A," *by Arthur Bates Lincoln* ..... Sept., 621

Plym Fellowship in Architecture—*Results and winning design* ..... June, 440—441

POND, Irving K.—*Article,* "How I Approach an Architectural Problem" ..... July, 459

"Popularizing the Profession with the Public and with Itself," *by D. Knickerbacker Boyd* Jan., 45

Porcelain Enamel Residence, Charles Bacon Rowley and Associates, Architects ..... Feb., 128

Details of construction for application of porcelain enamel shingles for porcelain enamel house ..... Sept., 637—652

"Posters, A Group of British 'Architectural' Railway," *by Rodger L. Simons* ..... Nov., 739

PRENTICE, Andrew N.—"Renaissance Architecture and Ornament in Spain," *Plates* .... March, 179; April, 265

Princeton Prizes in Architecture for 1932—*Results and winning designs* ..... Aug., 583—584

Princeton-Yale Intercollegiate Competition in Architecture—*Results and winning designs* .. Jan., 60

"Provincialism vs. H. R. 6187," *by H. H. Harriss* March, 188

Radiator Enclosures, Comparative details of, *Drawings by Paul F. Zeidler from architects' data* ..... Dec., 831—837

Radio Cabinet Design Competition—*Results* .. Sept., 637

"Real Estate Situation, An Architect's Appraisal of the," *by H. I. Feldman* ..... April, 283

REINHOLD, Elsa—*Pencil drawing*, "The Parthenon" ..... Feb., 127

"Rendering, On the Use of Cutouts in," *by Arthur L. Guptill* ..... March, 167

REUTHER, Henry E.—*Letter concerning H. R. 6187* ..... April, 292

RIGG, Alwin—*Pen-and-ink sketch*, "Ponte Vecchio, Florence" ..... Jan., 54

RIPLEY, Hubert G.—*Group of carbon pencil sketches*
"Café Des Deux Magots and St. Germain Des Près"
"Corner of Angkor-Wat"
"Notre Dame De Paris in Silhouette"
"Vista at Vaux-Le-Vicomte"
"Fountains at Vaux-Le-Vicomte"
"Le Tour St. Jacques at Sunrise"
"St. Germain Des Près"
"Pont Royal at Seven in the Morning" .... May, 303—310
Article, "New England Inns and Taverns," *Monograph Series* ..... Dec., 803—818

ROBB, E. Donald—*Oil painting*, "Ambulatory of a French Cathedral That Never Was Built," *Color plate, Frontispiece* ..... Dec.

ROBERTS, A. D.—*Two pencil sketches*, "The Lottie Carson," San Pedro Harbor—"Star of India," San Diego Harbor ..... Nov., 750

Rome Prize in Architecture—*Results and winning design* ..... June, 428—431

Rome Prize in Landscape Architecture—*Results* June, 429
Winning design ..... July, 497

"Roofs," *Monograph Series, by Aymar Embury, II* ..... April, 249—264

Rotch Traveling Scholarship—*Results* ..... June, 438

ROTH, Ernest—*Drypoint*, "The Square, Abbeville," *Frontispiece* ..... Feb.

"Rothenburg, Some Sketches of Old"—A Discussion of the Work of Otto Bierhals, *by David M. Ach* ..... April, 235

ROWE, John Richard—*Pen-and-ink drawing*, "An Old House in Connecticut" ..... April, 228
Pen-and-ink drawing, "Old House in Connecticut" ..... May, 302

ROWLAND, Wirt C., and H. Augustus O'Dell—Details of shopfront for Dewitt Taylor Estate, Detroit ..... July, 508

ROWLEY & Associates, Architects, Charles Bacon—Porcelain enamel residence for Ferro Enamel Corporation ..... Feb., 128
Details of construction of application of porcelain enamel shingles for porcelain enamel house at Cleveland, Ohio ..... Sept., 637—652

"Salem, Massachusetts, Public Buildings of," *Monograph Series, by M. S. Franklin* ..... June, 407—422

"Saving Through Careful Superintendence," *by H. Vandervoort Walsh and Alexander T. Saxe* ..... May, 311

SAXE, Alexander T., and H. Vandervoort Walsh—*Article*, "Comparative Costs of the Walls of Country Houses" ..... Feb., 93
"Saving Through Careful Superintendence" May, 311
"Comparing the Cost of Different Types of Floor Construction" ..... Aug., 555

SCARAB, The, Delegates to the Fifteenth Annual Convention, held at the University of Cincinnati—*Group photograph* ..... Feb., 129

SCHEER, Leonard—Elevation and plan of "A Modern Country Residence at Croton-on-Hudson, New York" ..... Sept., 638—639

SCHEICK, William H.—*Biographical sketch* . May, 359

SCHIWETZ, Edward M.—*Lithograph*, "Manhattan Morning, North River," *Plate* ..... March, 181

SCHMIDT, Mott B.—*Pencil sketch*, "Academy of Fine Arts, Copenhagen" ..... March, 190

SCHNEIDER, Charles S.—*Obituary* ..... May, 369

SCHWARZ, Frank H.—*Two pencil drawings*, "Studies for an Altarpiece—St. Joseph's Church, Seattle, Washington," *Plate* ..... April, 269

"Scope of the Work? Why," *by Goldwin Goldsmith* ..... March, 211

SEXTON, R. W.—*Article*, "An Architect Who Went After Business—and Got It" ..... Dec., 802

"Shop Signs of Stockholm," *by Dorothy Brink Ingemann* ..... Sept., 619

Silhouettes of American Draftsmen and Designers—VII, Otho McCrackin, *by George W. Smith* ..... March, 147

SIMONS, Rodger L.—*Article*, "A Group of British 'Architectural' Railway Posters" .... Nov., 739

SIMPSON, Lusby—*Water color rendering*, "Inland Terminal Number One for the Port of New York Authority," Abbott, Merkt, and Company, Engineer-Architect, *Color plate* ... May, 347

"Slate, and Structural Glass, Interior Marble," *by Philip G. Knobloch* ..... Aug., 591

Small House Competition, held by the Architects' Emergency Committee—*Results* ..... March, 200
Winning designs ..... April, 288—289

Small House Competition conducted by *House Beautiful*—*Results* ..... Dec., 846

SMALL HOUSES BY

ROWLEY and Associates, Architects, Charles Bacon—Porcelain enamel residence for Ferro Enamel Corporation ..... Feb., 128

SCHEER, Leonard, Architect—Elevation and plan of "A Modern Country Residence at Croton-on-Hudson, New York" ..... Sept., 638—639

STODDARD, George Wellington, Architect—House for Robert Dyer, Seattle, Washington—*Pencil rendering, by John Overturf* .... July, 490

WILLS, Royal Barry, Architect—Perspective and block plan of low cost house ..... June, 390

SMITH, Benjamin Lane—*Biographical sketch* .. June, 438

SMITH, Donald Powers—*Biographical sketch* .. Sept., 640

SMITH, E. W. P.—*Letter discussing article on "T-Flange Girders," published in the September issue* ..... Oct., 705

SMITH, George W.—*Article*, "Silhouettes of American Draftsmen and Designers—VII"—Otho McCrackin ..... March, 147

SMITH, R. Harmer—*Pencil rendering*, "Study for the Church and Convent of St. Catharine of Sienna, New York," Wilfred E. Anthony Architect, *Plate* ..... Feb., 113

SMITH, Jr., Robert, Architect—Details of construction for frameless steel house at Solon, Ohio, built by the Insulated Steel Company of Cleveland, Ohio, and the American Rolling Mill Company of Middletown, Ohio ..... Oct., 714

SMITH, Sewall—*Sepia sketch*, "Venice" Aug., 538

SMITH, Jr., Walter K.—*Article*, "The Charcoal 'Smooch' Technique" ..... March, 163

SOURIAN, Zareh M.—*Photograph and detail drawing of rug display* ..... Nov., 782

SPECIFICATION ARTICLES BY

DOWSWELL, H. R.—"Or Equal as Approved" ..... Dec., 851

EMERSON, David B.—"Building Stone,"
Part II ..... Jan., 69
Part III ..... Feb., 139
"Decorative Stone," Part I ..... May, 378
Part II ..... June, 455
"Bank Vaults" ..... Sept., 649

GOLDSMITH, Goldwin—"Why Scope of the Work?" ..... March, 211

SPECIFICATION ARTICLES BY—(Continued)

KNOBLOCH, Philip G.—"Whys and Wherefores of the Specification," 12.—Metal Furring and Lathing ... April, 293
13.—Tile Work ... July, 513
14.—Interior Marble, Slate and Structural Glass ... Aug., 591
15.—Plastering ... Oct., 723

WALLIS, R. P.—Insurance During Construction ... Nov., 781

STAHL, F. H.—*Pen-and-ink drawing*, "Tabernacle Presbyterian Church, Indianapolis, Indiana," J. W. C. Corbusier, Architect, Robert Frost Daggett, Associate ... Jan., 11

"Stainless Steels, Soldering the," *by V. W. Whitmer* ... May, 373

Steel House, Frameless, at Solon, Ohio, built by the Insulated Steel Company of Cleveland, Ohio, and the American Rolling Mill Company of Middletown, Ohio ... Oct., 714

"Steel Windows for Penal Institutions," *by Robert L. Clingerman* ... May, 349

STERNFELD, Harry—*Article*, "French Comrades in America, 4"—Jean Hébrard ... Feb., 75

Stewardson Memorial Scholarship—*Results and winning design* ... Oct., 712

STILES, Ezra C.—*Decorative alphabet of initials* Jan., 16— 18

"Stone, Building," *by David B. Emerson*, Part II Jan., 69
Part III ... Feb., 139

"Stone, Decorative," *by David B. Emerson*, Part I May, 378
Part II ... June, 455

STONE, Edward D.—*Pastel rendering*, "Preliminary Sketch for Roxy Theatre at Rockefeller Center, New York," *Color plate, Frontispiece* Sept.

"Store Interiors, Federal Studies of," *by Waldon Fawcett* ... Nov., 770

STRANG, Allen J.—*Sepia crayon drawing*, "Cathedral, Orvieto" ... Oct., 703
Pen-and-ink and rubbed pastel drawing, "Portals of St. Gilles" ... Nov., 752

"Sundials, Some Old," *by Page L. Dickinson* ... Oct., 673

Supervising Architect's Office, Letters discussing "H. R. 6187" from ... March, 187
Letter concerning "H. R. 6187" ... April, 292

SWALES, Francis S.—*Article*, "The Architect and the Grand Plan," 4.—Replanning of the First Modern City—Imperial Rome ... Jan., 21
5.—Replanning of the First Modern City—Imperial Rome ... April, 229
6.—The Architect's Status and the Development of Rome ... Aug., 525
Article, "Henry P. Kirby—1853-1915" ... Oct., 657
Two water colors, "Portions of Project for Development of East River Front, Manhattan Island"—Regional Plan of New York, *Color plates* ... Jan., 35— 37

"Taverns, New England Inns and," *Monograph Series, by Hubert G. Ripley* ... Dec., 803—818

THAL, Sam—*Pencil sketch*, "Gloucester Wharf" Nov., 736

Thompson Company Restaurant, Indianapolis, Indiana, Benjamin R. Marshall Company, Architects, Chicago—*Linoleum panel* ... Nov., 768

"Tile Work," *by Philip G. Knobloch* ... July, 513

"Tradition," *by Emery Kanarik* ... Jan., 53

"Traveling Double," *by Sylvia Starr Wertz*, Part 1 June, 425
Part 2 ... July, 491

"Unemployment, The Cultural Advantages of," *by William Williams* ... Feb., 99

"Up-state," *by Frederick A. Muhlenberg* ... Sept., 611

"*Vade Mecum* for Draftsmen, A," *by Don Graf* Jan., 55

VAN HOUTEN, J. H.—*Article*, "Exterior Walls" ... May, 380

VASSOS, John—*Article*, "Orange Juice Goes Modern" ... Sept., 645

VERY, Samuel R. T.—*Article*, "An Unusual Alteration Job" ... April, 219

WAGNER, William Sydney—*Obituary* ... July, 495

WALCOT, William—*Two etchings*, "The Forum"—After the Forum at Rome, "A Performance at the Coliseum—Vespasian's Amphitheatre—Rome" ... Jan., 24— 25

WALKER, C. Howard—*Article*, "Functionalism and Architecture" ... Dec., 787

WALLIS, R. P.—*Article*, "Insurance During Construction" ... Nov., 781

"Walls of Country Houses, Comparative Costs of the," *by H. Vandervoort Walsh and Alexander T. Saxe* ... Feb., 93

"Walls, Exterior," *by J. H. Van Houten* ... May, 380

WALSH, H. Vandervoort, and Alexander T. Saxe—*Article*, "Comparative Costs of the Walls of Country Houses" ... Feb., 93
"Saving Through Careful Superintendence" May, 311
"Comparing the Cost of Different Types of Floor Construction" ... Aug., 555

WARE, Arthur—*Two pencil sketches* ... Jan., 44

WARNER & MITCHELL, Architects, *Three interior views and plan of offices of* ... Jan., 62— 63

WARREN, Harry G.—*Two pencil sketches*, "The New Waldorf Nearing Completion"—"The Tower of the Lexington, New York" ... Jan., 12

"Washington, Architect, George," *by James Hay, Jr.* ... Feb., 102

WATKIN, William Ward—*Article*, "For the Future, Fitness and Harmony" ... Feb., 73

WEBSTER, Herman—*Etching*, "The Tower," *Frontispiece* ... Jan.

WERNER, Richard J.—*Water color* ... Nov., 775

WERTZ, Sylvia Starr—*Article*, "Traveling Double," Part 1 ... June, 425
Part 2 ... July, 491

WHITMER, V. W.—*Article*, "Soldering the Stainless Steels" ... May, 373

"Whys and Wherefores of the Specification," *by Philip G. Knobloch*, 12.—Metal Furring and Lathing ... April, 293
13.—Tile Work ... July, 513
14.—Interior Marble, Slate, and Structural Glass ... Aug., 591
15.—Plastering ... Oct., 723

WILLIAMS, Edgar I.—*Pencil drawing*, "A Tree Study," *Plate* ... Jan., 39

WILLIAMS, William—*Article*, "The Cultural Advantages of Unemployment" ... Feb., 99
Article, "A la Mode Horizontale" ... April, 271

WILLS, Royal Barry—*Article*, "How to Find a Job During a Depression" ... Jan., 13
Article, "A Real Low Cost House" ... June, 391

WISEMAN, Robert—*Two sketches*, "In the Erie Basin, Brooklyn"—"Property Street, Central Park, Manhattan" ... Dec., 840

WITTON, Frederick R.—*Pastel drawing*, "Sketch for a Proposed Educational Group on the Bank of a River," McLaughlin and Burr, Architects, *Color plate, Frontispiece* ... May

WOLF, J.—*Soft ground color etching*, "Porta Della Carta, Doge's Palace, Venice," *Plate* ... Feb., 109

Woodman Scholarship in Architecture—*Results* July, 503

YAEGER, Roland A.—*Article*, "Can Some Architect Answer This One?" ... Oct., 702
Two replies to above article by Rossel Edward Mitchell and Fred W. Clarke ... Nov., 774—775
A Further Reply by an Ex-Draftsman ... Dec., 836

YEWELL, J. Floyd—*Water color drawing*, "Residence for Mr. and Mrs. William S. Barstow, Great Neck, L. I.," Greville Rickard, Architect, *Color plate* ... June, 423

ZEIDLER, Paul F.—*Comparative details*—Group 1—"Dormers" ... Oct., 695—701
Group 3—"Details of Radiator Enclosures" Dec., 829—835



TWO OR TWO HUNDRED YEARS MAKE LITTLE DIFFERENCE HERE

THE Carew Tower Building of Cincinnati is celebrating its second birthday. The forty stories of this ultra-modern skyscraper are lined completely with Atlantic Wall Units which are as cheerful and beautiful as on the day of installation. Further, they will remain so for the life of the building, as this Terra Cotta material is literally everlasting.

The interior views opposite show a typical corridor and an elevator lobby in a mottled cream and tan Abbochrome, a color that gives a high coefficient of light diffusion. Attractive features, too, are the black base units and the rounded cap units, designed to carry wiring conduits.

Atlantic Wall Units' first cost is a low cost and a last cost. They never require painting, and seldom washing or other maintenance. Large sized, light, and absolutely true-edged, they allow economical setting, while partition walls are erected without use of other materials. The units are hollow, giving insulation against heat, cold and sound. Fire resistant, sanitary, immune to defacement, and with an unlimited palette of colors and textures, this material is unique in wall construction for any type of building.

The Building Manager of Carew Tower writes: July, 1931: *"Regarding the use of Terra Cotta for corridor partitions, we have found it eminently satisfactory in the Carew Tower. It is of elegant appearance, economically installed, removed and maintained, and thoroughly practical in every respect . . . It is our opinion that many buildings of the future will adopt the use of Terra Cotta for corridor partitions."* . . . . . *and fifteen months later:* October, 1932: *"I reiterate my praise of Atlantic Terra Cotta Units for corridor partitions, as in my letter of July 24th, 1931. My conviction on the merits of your product has many times been confirmed by voluntary commitments, both on the part of tenants and visitors of the Carew Tower . . . In regard to necessary maintenance of these partitions, I know of no corridor construction involving equally low costs."* (Signed) *N. E. BROWNE*

ATLANTIC TERRA COTTA COMPANY

Office and Exhibition Rooms: 19 West 44th Street, New York
Southern Plant: Atlanta Terra Cotta Company, Atlanta, Georgia

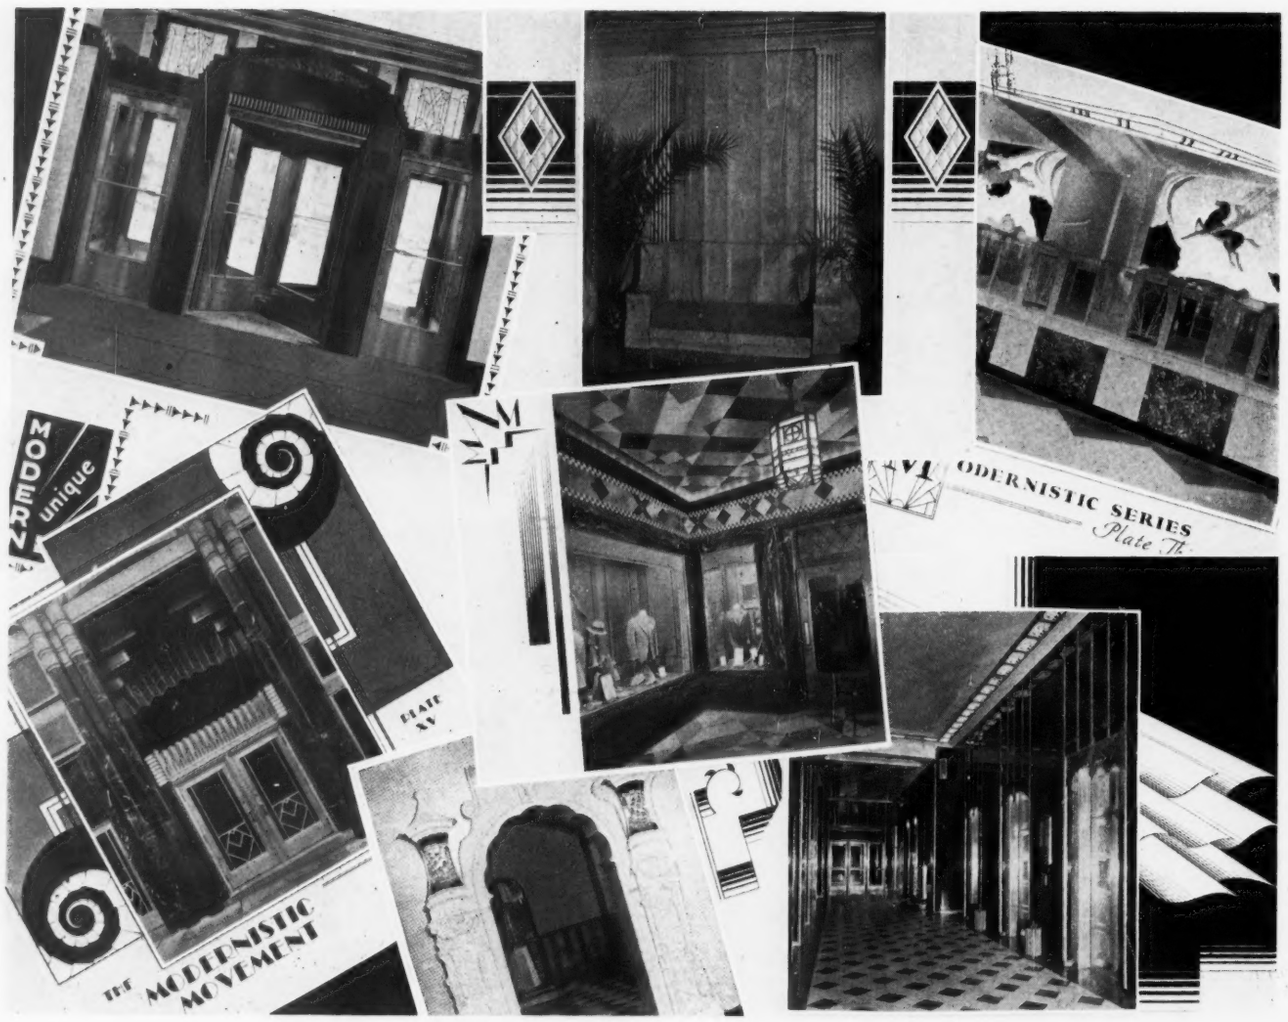

The Modernistic Series— Ready for Filing

The modernistic plates which have appeared from time to time in our architectural journal advertisements have now been assembled in a form adapted for filing. Fifteen distinctive buildings are included in the set, and each illustrates some phase of the modern trend in marble construction.

This series will be mailed without charge to any architect who is interested. No letter is necessary. Simply write the words, "Send plates," across your card or letterhead.

VERMONT MARBLE COMPANY—PROCTOR, VERMONT

Branches in the larger cities

See Sweet's Catalog for Specifications and Other Data

VERMONT MARBLE

G-E WHITE ELECTRICAL CONDUIT MADE BY GENERAL ELECTRIC

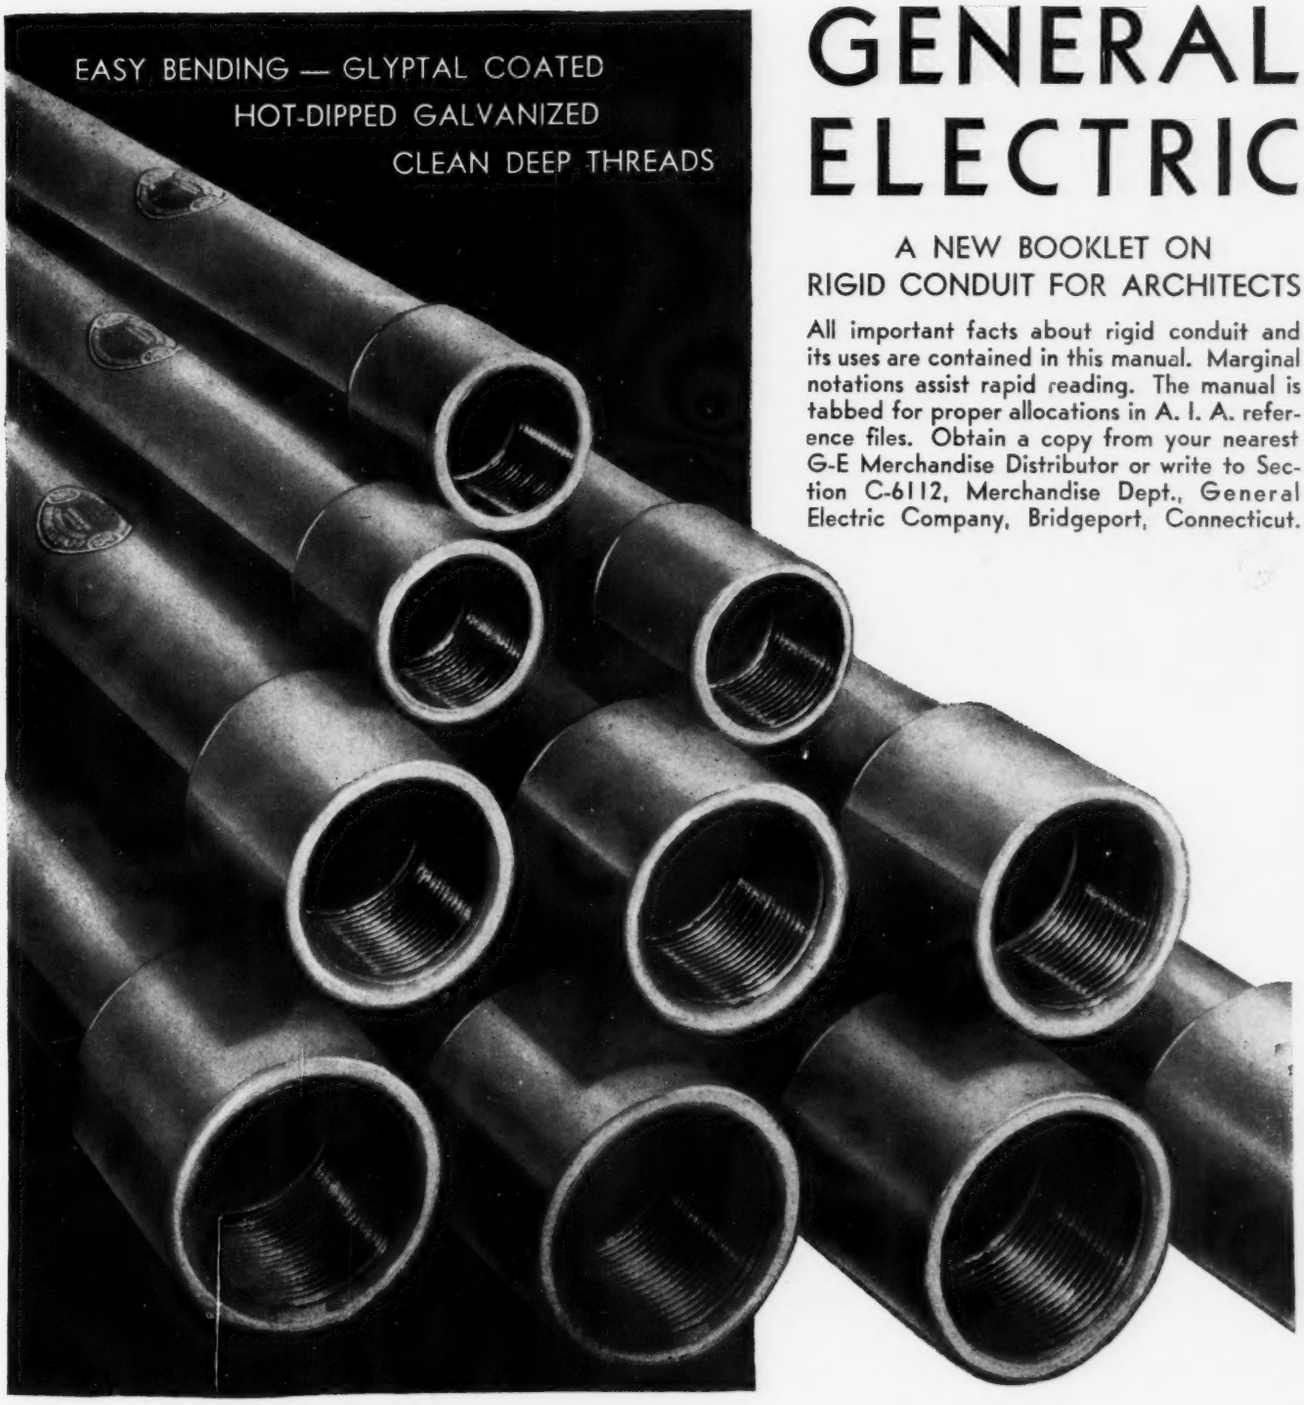

A NEW BOOKLET ON
RIGID CONDUIT FOR ARCHITECTS

All important facts about rigid conduit and its uses are contained in this manual. Marginal notations assist rapid reading. The manual is tabbed for proper allocations in A. I. A. reference files. Obtain a copy from your nearest G-E Merchandise Distributor or write to Section C-6112, Merchandise Dept., General Electric Company, Bridgeport, Connecticut.

GENERAL ELECTRIC

RIGID CONDUIT

MERCHANDISE DEPARTMENT, GENERAL ELECTRIC COMPANY, BRIDGEPORT, CONNECTICUT

The Allegheny County General Hospital required more than a carload of Duriron pipe.
YORK & SAWYER, Architects
G. H. SOFFEE CO., Plumbing Contractors

HOSPITALS are, and should be, the exemplifications of the latest and greatest developments in the building arts.

Duriron Acid-Proof Drain-Pipe rightfully has a place in such structures, where the prolonging and lengthening of Life is the sole reason for its existence.

The modern hospital uses Duriron sinks, drain-pipes, flanges and fittings wherever acid wastes are encountered.

See our section in Sweet's Catalog

THE DURIRON CO., INC.
420 N. Findlay St., Dayton, Ohio

DURIRON ACID PROOF DRAIN-PIPE

It costs so little TO PROTECT YOUR REPUTATION.

PREVENT EFFLORESCENCE

Efflorescence is caused by the presence of soluble salts in masonry materials. When reached by water, these salts dissolve and thus work their way to the surface of the wall. . . . Brixment never causes efflorescence because it contains less than ½ of 1% of soluble salts. . . Furthermore the waterproofing in Brixment mortar prevents water from entering the wall and dissolving any salts which may be present in the sand or the brick. Brixment is therefore endorsed by manufacturers of face brick.

LOUISVILLE CEMENT COMPANY, *Incorporated*, LOUISVILLE, KY.

District Sales Offices: 1610 Builders Bldg., *Chicago;* 600 Murphy Bldg., *Detroit;* 101 Park Ave., *New York*

Mills: Brixment, N. Y. and Speed, Ind.

BRIXMENT

A Cement for Masonry and Stucco

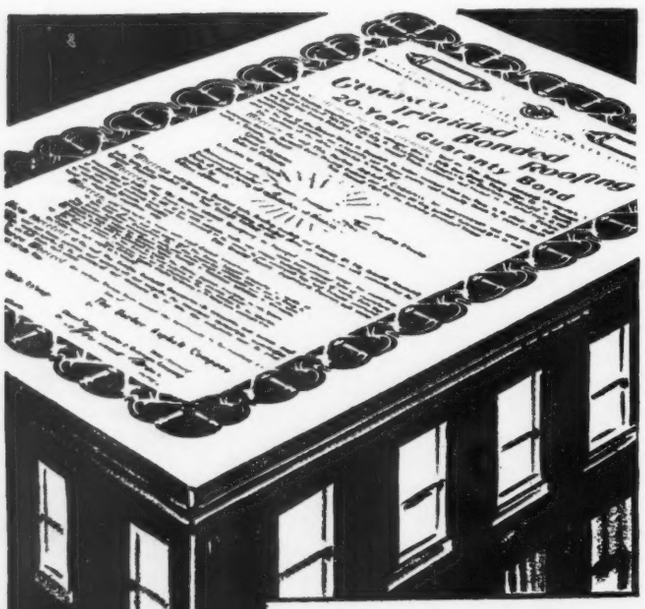

Specify Genasco *It's safe!*

—Bonded by The United States Fidelity and Guaranty Company, Baltimore.

REMEMBER, Genasco is a roof you can forget for 10, 15 or 20 years after it is laid. A surety bond by a recognized company protects the owner.

Because of this underwritten guarantee, also because of the reputation and quality of Genasco Trinidad Bonded Roofing, industry is more and more depending upon this sturdy roof.

Genasco Trinidad Bonded Roofings, made with alternate layers of Genasco Trinidad Lake Roofing Asphalt and layers of Genasco all-rag felt, now include the following:

Genasco Trinidad 20-year Bonded Roofing with slag, crushed stone or gravel surfacing. Class A Underwriters' Laboratories Classification—guaranteed twenty years by The United States Fidelity and Guaranty Company, Baltimore, Maryland.

Genasco Trinidad 15-year Bonded Roofing with slag, crushed stone or gravel surfacing. Class A Underwriters' Laboratories Classification—guaranteed fifteen years by The United States Fidelity and Guaranty Company, Baltimore, Maryland.

Genasco Trinidad 10-year Bonded Roofing with smooth surface. Guaranteed ten years by The United States Fidelity and Guaranty Company, Baltimore, Maryland.

Write us today for specifications and full information regarding Genasco Trinidad Bonded Roofing

The Barber Asphalt Company
Philadelphia

New York Chicago St. Louis

Genasco
Reg. U. S. Pat. Off.

TRINIDAD BONDED ROOFING

Reg. U. S. Pat. Off.

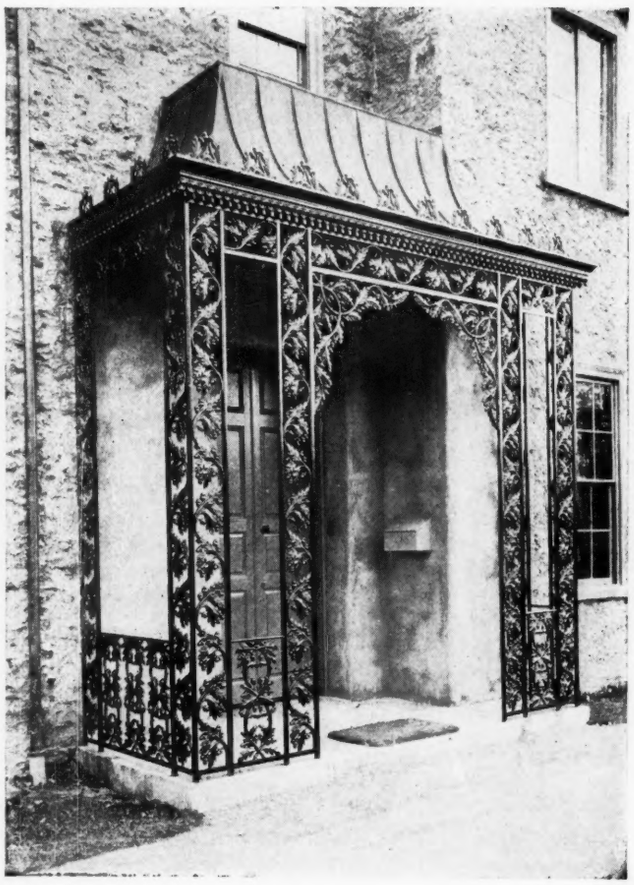

SMYSER-ROYER CO.
CAST IRON VERANDAS

•

Smyser-Royer Co. cast iron verandas are available in a variety of designs.

Smyser-Royer Co. service includes complete engineering, designing and foundry facilities. Architects and builders who are contemplating the use of cast iron verandas are cordially invited to consult Smyser-Royer about any phase of design or construction.

A booklet showing a number of Smyser-Royer cast iron veranda designs will be mailed at your request.

•

SMYSER-ROYER COMPANY
Main Office and Works, York, Pa.
Philadelphia Office, 1700 Walnut Street

CLEAN DEEP - CUT THREADS

YOUNGSTOWN PIPE

THE YOUNGSTOWN SHEET AND TUBE CO.

GENERAL OFFICES - YOUNGSTOWN, OHIO

STOP
GERM-SPREADING

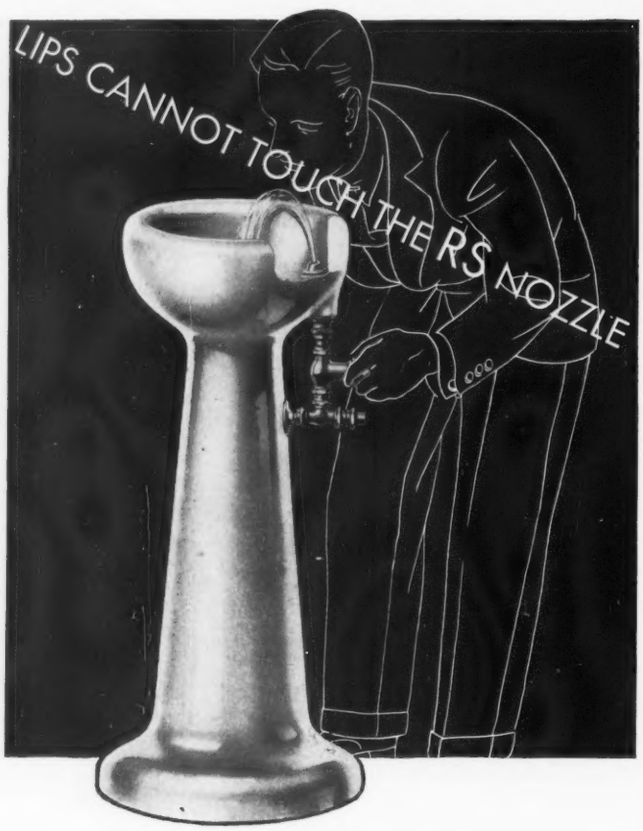

Many vital improvements have been made in drinking methods, but, heading the list, is the R-S Vertico-Slant Sanitary Fountain—an advantage which stops germ-spreading.

This fountain never feels the touch of contaminated mouths and lips. It prevents them from even coming close to the jet that spouts the water.

The Vertico-Slant with the water passing angularly from jet to mouth makes each drink a safe and sanitary one. Write for bulletin.

* * *

RUNDLE-SPENCE MFG. CO.
452 No. Fourth Street Milwaukee, Wis.

RUNDLE-SPENCE

CONTINUOUS FLOW BATHS

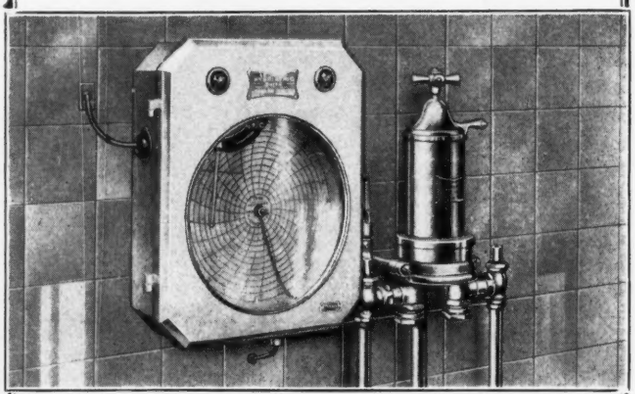

Leonard HYDRIATRIC Suite
Reg. U. S. Pat. Off.

When you specify a

LEONARD HYDRIATRIC SUITE

you have a choice of six designs in cases and twelve different combinations.

Write for catalogue F which is standard A. I. A. File size.

In Sweet's Catalogue

Manufactured by

LEONARD-ROOKE COMPANY
INCORPORATED
Providence, Rhode Island



A Bargain in Luxury

- Now you can enjoy the luxury and convenience of the Book-Cadillac Hotel in Detroit at prices that fit 1932 budgets.
- Many of the 1200 rooms of this famous hotel now are priced as low as $3 a day for one person, $5 for two. And every room has bath, circulating ice water, and other modern conveniences.
- Restaurant prices have been scaled down to thrifty new levels, too. The five restaurants include a cafeteria and coffee shop with quick service and popular priced menus.
- Try the Book-Cadillac the next time you visit Detroit.

Under direction of Ralph Hitz

E. T. LAWLESS
Manager

Book-Cadillac
DETROIT

HOTEL NEW YORKER, NEW YORK, ALSO UNDER RALPH HITZ DIRECTION

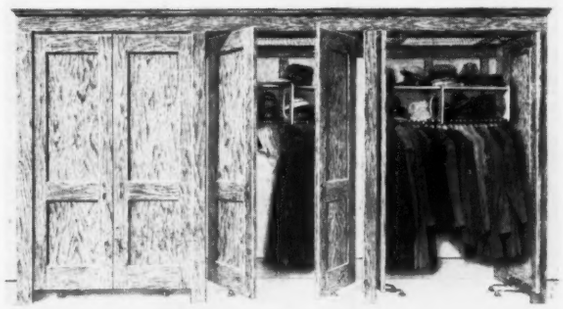

EVANS
"Vanishing
Door"
WARDROBE

●

Class J

equipped with either "Floor" type (as illustrated) or "Jamb" type hinges. This is Class D wardrobe if made with flush doors.

CLASSROOM WARDROBES

High in Quality—Low in Cost

This type occupies a recess flush with the wall. Plaster back and ends. No partitions, but with mullions between pairs of doors. Wire mesh ceiling. Blackboards if required.

The "Vanishing Door" hinges on which the doors are hung are made with double pivoted arms and swing the doors back into the wardrobe entirely out of the way. Simple—trouble-proof—and last as long as the building.

Wardrobes are furnished complete in the knockdown, with all woodwork cut to size, and only need to be nailed in place. The hinges are easier to put on than common butt hinges. The entire cost of installation is small.

We make many other types of school wardrobes, fully illustrated and described in 1933 Sweet's, volume C, pages 774-781.

W. L. EVANS

WASHINGTON, INDIANA, U. S. A.

Bommer

Spring Hinges



are the best by rigorous test

Millions and Millions

of People are Pushing

them

whenever they open a door

Catalog No. 50 mailed free

Follow the line of least resistance

See details in "Sweet's"

Specify-Bommer-Always

They are the best

Bommer Spring Hinge Co., Brooklyn, N. Y.

PECORA

MORTAR STAINS

About six million Gray Brick #68 were supplied by Sayre & Fisher Brick Co., Sayreville, N. J., for the Columbia Presbyterian Medical Center, New York. James Gamble Rogers, Archt. Pecora Mortar Stains can be used advantageously with this or any other style of brick.

EXCELLENT contrasts, desirable blending of tones, may be achieved by the use of Pecora Mortar Stains when laying up brick or other masonry.

The use of Pecora Mortar Stains is not confined to larger structures. The cost is so moderate, and the results so welcome from the viewpoint of increased charm and cheerfulness, that Pecora Mortar Stains are widely employed for the exteriors of small residences, for fireplaces, for porch enclosures, for lobbies, for brick fence and gate posts.

There are 12 standard colors to choose from, colors that are rich, uniform and fadeproof. Supplied in paste form ready to be mixed with either lime or cement mortar. Pecora Mortar Stains do not cause or increase efflorescence.

For further details see Sweet's Catalog or write direct to us

Copyright, 1932, by Pecora Paint Co., Inc.

Pecora Paint Company

Sedgley Avenue and Venango Street
PHILADELPHIA, PA.

Established 1862 by Smith Bowen

ALSO MAKERS OF PECORA CALKING COMPOUND

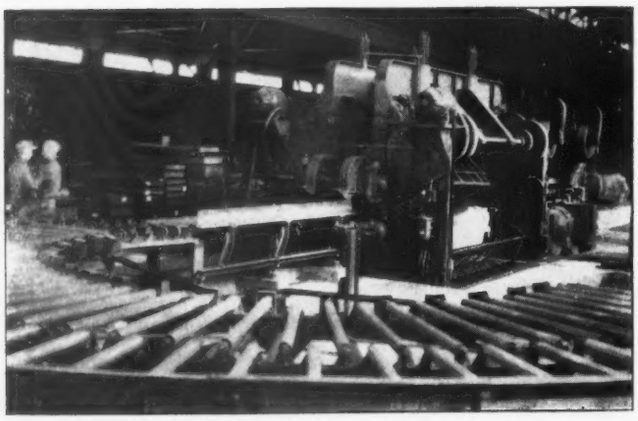

$50,000 worth of shears

Over the cooling table the sheets come, automatically, of course, turn the bend, and enter these shears that trim all four sides at once. Phing—and the job's done.

Typical of Newport's methods! Those things which are best done automatically are done automatically. Those things which are best done by hand are done by hand. *And never the twain shall meet.*

And the result of this stickling for what is best is shown in GOHI—in the sheet itself, in the results it gives you.

GOHI—Pure Iron with copper added—for almost a quarter of a century has proven itself the one low cost ferrous metal most suitable for building and fabricating purposes.

Long lasting because of its purity and alloyed copper, it is, at the same time, dense, homogeneous, ductile—easy to work, to bend, to cut, to shape, to weld.

Low in first cost, in fabrication cost, in last cost, GOHI adds value wherever it is used.

Write for your copy of the GOHI Architect's Specification Book—a practical manual crammed with useful information and pictures of GOHI installations. It's FREE.

GENUINE OPEN HEARTH IRON GOHI PURE IRON - COPPER ALLOY

The Newport Rolling Mill Co.
Newport, Kentucky

GOHI
PRONOUNCED "GO-HIGH"
SHEET METAL

Let holly-time mean holiday

ALL day long at Chalfonte-Haddon Hall, Christmas is a delightful adventure. Carols in the morning. Stockings . . . stuffed with surprises . . . on the doorknobs, for the children. A plump family turkey for dinner. Entertainments. Concerts. Here is all the gaiety of a Christmas at home, all the comfort . . . without the long hours of exhausting preparation. The hotel itself is a fairyland of poinsettias and holly and fragrant Christmas trees. The decorated Boardwalk a sight to remember all your life.

In addition, there is the brilliant beauty of the winter sea, the crisp and tonic ocean air.

Grown-up families, too, have found Chalfonte-Haddon Hall a happy place. Bring *your* family for the week-end, or the whole holiday week. Special holiday entertainment. *Winter rates . . . the lowest in years.* We will be glad to send you information.

American and European Plans

CHALFONTE-HADDON HALL

ATLANTIC CITY

Leeds and Lippincott Company

L·SONNEBORN SONS, Inc.

GUARANTEE:

EVERY ARCHITECT takes professional pride in specifying a fine wood floor. This satisfaction can be LASTING if floors are treated with LIGNOPHOL

The PRIDE of ACHIEVEMENT...

THIS PREPARATION has amazing powers of penetration. It is not merely a "finish" — it is a preservative. It can't evaporate like floor oil, it can't wear off like varnish. It assures enduring beauty.

The cost is very little — only one or two cents a square foot and Lignophol can be specified in penetrating or wax finish in all standard colors that harmonize with every variety of wood.

If you want an entirely successful floor finishing job, don't use an "open" specification which would permit the substitution of inferior products. Specify LIGNOPHOL — applied by trained Sonneborn appliers. Then the contract will carry an absolute warranty of satisfaction.

This expert service can be employed at very reasonable cost. If you will give us the floor dimensions we will quote an *applied* price before you write the final specifications.

Full specifications will be found in Sweet's Catalog, page A 355.
May we send you the Lignophol book?

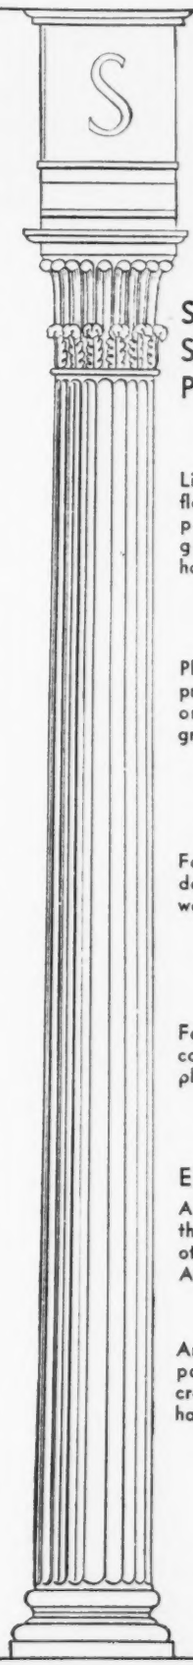

Some Other Sonneborn Products . . .

LAPIDOLITH
Liquid chemical concrete floor hardener welds loose particles into a close-grained mass, granite hard.

HYDROCIDE No. 633
Plaster bond and damp-proofing paint for interior or exterior walls above ground.

HYDROCIDE No. 648
Mastic, Semi-Mastic
For waterproofing and damp-proofing foundation walls and footings.

HYDROCIDE INTEGRAL
Paste, Powder
For waterproofing mass concrete, stucco, cement plaster and brick mortar.

CEMCOAT INTERIOR and EXTERIOR PAINTS
A tough, lasting paint that stays white after other paints turn yellow. Also in colors.

TRIMIX
An efficient liquid compound for integral concrete waterproofing and hardening.

L. SONNEBORN SONS, Inc., 88 Lexington Avenue, New York

1818 HOPE'S 1932 WINDOWS

FOLGER SHAKESPEARE LIBRARY, WASHINGTON, D. C.

Paul P. Cret, Architect
Alexander B. Trowbridge, Consulting Architect

THE FINEST BUILDINGS THROUGHOUT THE WORLD ARE FITTED WITH HOPE'S CASEMENTS
In addition to the custom built casements that form such an harmonious contribution to this impressive building we make windows for less monumental structures and for residences. We have just published a catalog (Publication No. 22) describing our new light Standard Windows with integral screens suitable for moderately priced residences. Please write for your copy if you have not yet received it.

HOPE'S WINDOWS INC.
JAMESTOWN, NEW YORK
Combining Henry Hope & Sons, Inc. and International Casement Co., Inc.

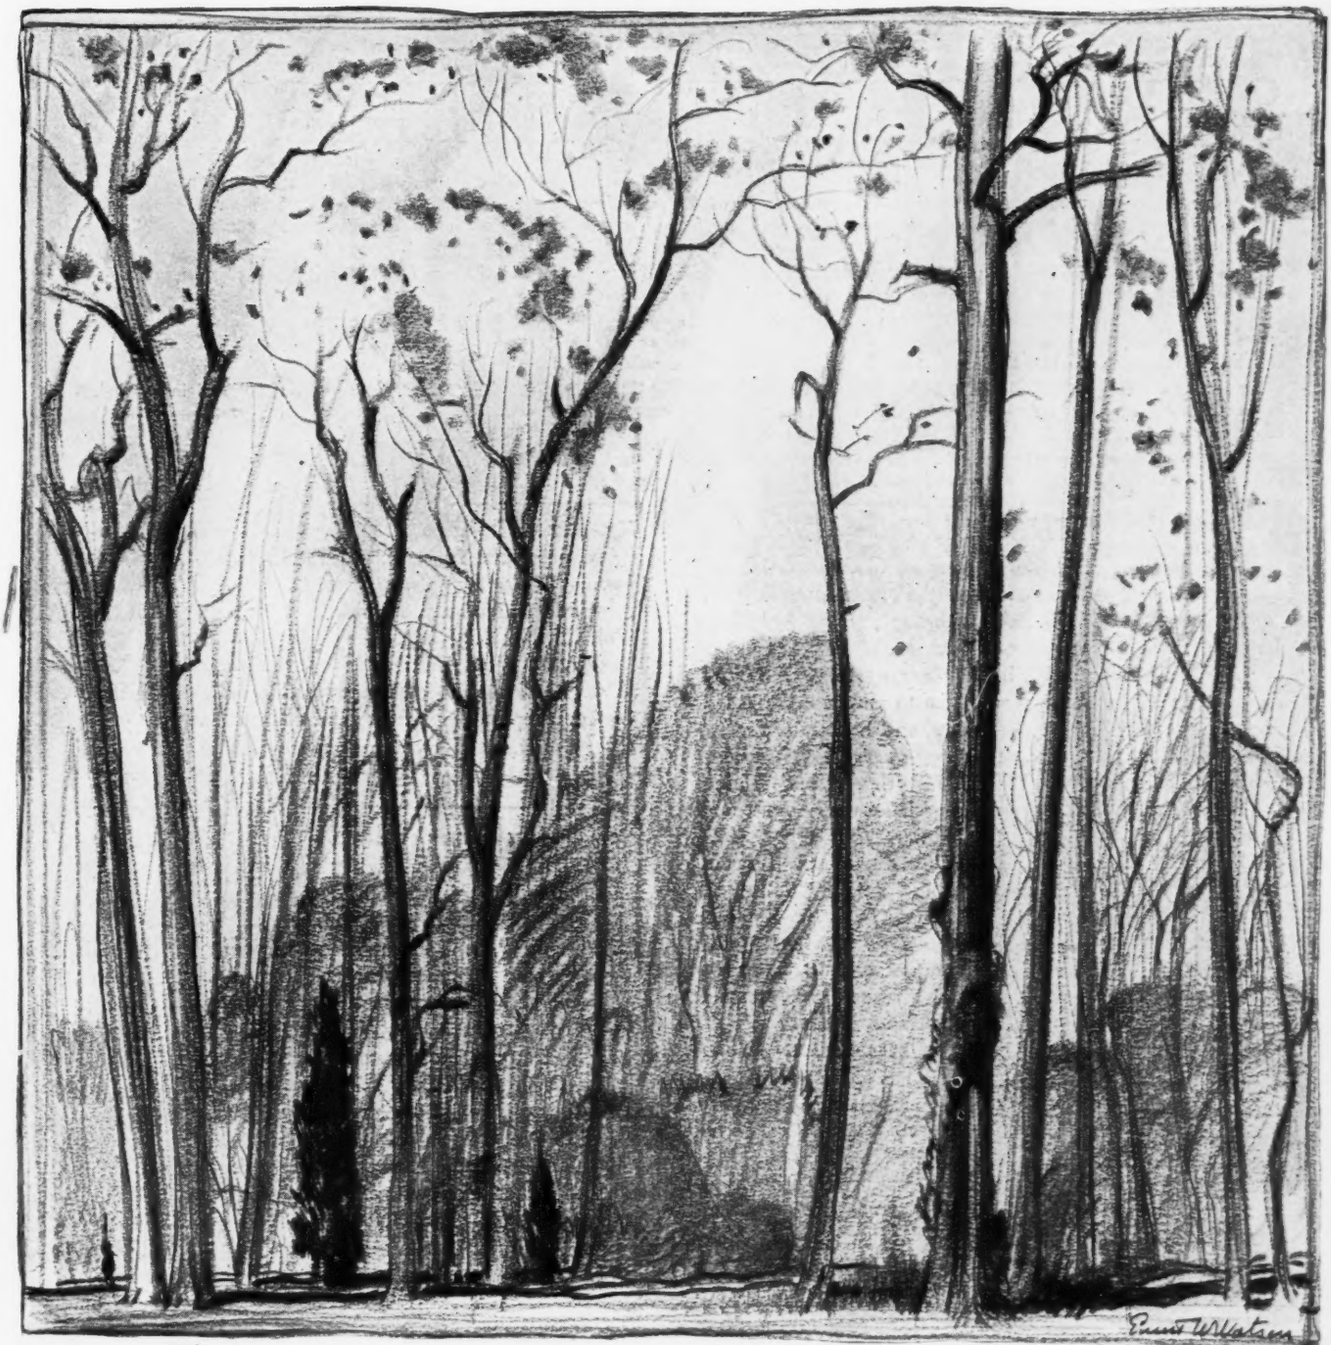

ELDORADO

© 1932

The Master Drawing Pencil

Berkshire Trees No 12

AUTUMN WOODS · A problem in line, space, and mass. The line of the tree trunks—their spacing—and the mass of the distant trees. Technique—free and suggestive rather than exact. 3B and 5B pencils used with a little stumping—Long shadows of a late November afternoon. Cedar trees important for their accents of dark in an otherwise gray composition.

Send for samples of ELDORADO *to the* JOSEPH DIXON CRUCIBLE COMPANY, *Dept.* 167-J, Jersey City, N. J.

SERVICE DEPARTMENTS

THE MART. In this department we will print, free of charge, notices from readers (dealers excepted) having for sale, or desiring to purchase books, drawing instruments, and other property pertaining directly to the profession or business in which most of us are engaged. Such notices will be inserted in one issue only, but there is no limit to the number of different notices pertaining to different things which any subscriber may insert.

PERSONAL NOTICES. Announcements concerning the opening of new offices for the practice of architecture, changes in architectural firms, changes of address and items of personal interest will be printed free of charge.

FREE EMPLOYMENT SERVICE. In this department we shall continue to print, free of charge, notices from architects or others requiring designers, draftsmen, specification writers, or superintendents, as well as from those seeking similar positions. Such notices will also be posted on the job bulletin board at our main office, which is accessible to all.

SPECIAL NOTICE TO ARCHITECTS LOCATED OUTSIDE OF THE UNITED STATES: Should you be interested in any building material or equipment manufactured in America, we will gladly procure and send, without charge, any information you may desire concerning it.

Notices submitted for publication in these Service Departments must reach us before the fifth of each month if they are to be inserted in the next issue. Address all communications to 419 Fourth Avenue, New York, N. Y.

THE MART

B. C. Holland, 721 Berea Avenue, Gadsden, Alabama, has the following copies of PENCIL POINTS for sale: August, 1929; May, 1929; August through December, 1931; January through September, 1932. Make offer.

Louis Pangaro, c/o D'Elia & Mastrangelo, 591 Summit Ave., Jersey City, N. J., would like to purchase the A.I.A. *Handbook of Architectural Practice*, and Babbitt's *Mechanical Equipment of Buildings.*

W. D. Connelly, No. 15, 327 14th Avenue, Minneapolis, Minn., would like to purchase the August and October, 1930, issues of PENCIL POINTS.

C. Ray Waddle, P. O. Box 1290, Station A, Lincoln, Nebraska, has the following for sale: Year 1929, PENCIL POINTS, in good condition, $3.50 postpaid, or 40c each copy; Harbeson's *Study of Architectural Design*, $4.00; *Masterpieces of Spanish Architecture*, $2.50; *Readers' Digest*, 1929, 1930, and 1931, each year $1.50, postpaid.

R. L. R., c/o PENCIL POINTS MART, has for sale 27 parts of the *White Pine Series of Architectural Monographs*, price $10.00.

Mrs. Tudor Tiedemann, 6 Pine Ter., Bronxville, N. Y., wants Vol. II, No. 6, of the *White Pine Series.*

Georgia School of Technology, Atlanta, Ga., Mrs. M. L. Hudson, Sec'y Architectural Dept., wants copies of PENCIL POINTS from July through December, 1928.

Richard Frost, Ramsey, N. J., has the following copies of PENCIL POINTS for sale: Years 1922, 1923, 1924 (except July), 1925, 1926, 1927, and January to May, 1928.

Joseph O. Cezar, 511 19th Street, Bedford, Indiana, has the following for sale: May, June, and July, 1929, PENCIL POINTS; Vol. I, Nos. 1, 2, and 3, and Vol. II, Nos. 2 and 5, *White Pine Series.*

George A. Hegewald, 450 Grant Avenue, Brooklyn, N. Y., has the following copies of PENCIL POINTS for sale: 1931 complete; January to November, 1932, inclusive; price $3.00 the lot.

Leo A. Hauser, 313 S. W. 30th Avenue, Miami, Florida, has the following copies of PENCIL POINTS for sale: complete for years 1926, 1927, 1928, 1929, 1930, 1931, 1932; also August, October, November, and December, 1925. All in perfect condition.

E. W. M., c/o THE MART, has for sale copies of PENCIL POINTS from November, 1920, to December, 1931, inclusive. Price $40.00.

E. W. B., care of PENCIL POINTS, has about twenty plates, interiors and exteriors, of Mizner's *Spanish Architecture in Florida.* Willing to sell at reasonable price.

Mr. Marion Davidson, c/o Hegeman-Harris, 360 Madison Avenue, New York, N. Y., would like to obtain the following *White Pine Series*: Vol. I, No. 3; Vol. II, Nos. 1, 3, 4, and 6; Vol. III, Nos. 1, 2, 3, and 4; Vol. X, No. 6; Vol. XI, No. 1.

George F. Wells, Horace Greeley House, East Poultney, Vt., has for sale beautiful collection of rare and fancy stones for fireplaces, rockeries, and ornaments.

PERSONALS

JOHN H. SAVOLAINE, ARCHITECT, has moved his office to its new quarters in the Johnson Bldg., New Castle, Pa.

JOHN A. D. MCGARR, ARCHITECT, has moved his offices from Brooklyn, N. Y., to 880 Bergen Avenue, Jersey City, N. J.

W. NEWTON DIEHL, ARCHITECT, formerly of Norfolk, Va., has become associated with the firm of Paul T. Stone, Inc., in charge of the architectural department, with offices at 1427 Eye Street, N. W., Washington, D. C.

STILES S. DIXON, ARCHITECT, has moved from Fayetteville, N. C., to P. O. Box 2372, Tucson, Arizona.

FRANK GRAD & SON, ARCHITECTS, have moved their offices from 1023 Broad Street to the Lefcourt Building, Newark, N. J. The firm name has been changed from Frank Grad due to the association with the office of Mr. Bernard J. Grad.

HOWARD D. FIEDLER, ARCHITECT, is now located at 99 State Street, Boston, Mass., instead of 89 Franklin Street.

HARRY E. REIMER, ARCHITECT, has moved his offices from 129 East Main Street to Nos. 11 and 13 West State Street, Marshalltown, Iowa.

F. A. LUDEWIG CO., ARCHITECTS, have moved from 3115 South Grand Blvd., to 4923 South Kingshighway, St. Louis, Mo.

ERNEST R. RICHARDS, ARCHITECT, has moved from 2123 Summerdale Ave., to 3822 N. Clark St., Chicago, Ill.

ANTHONY D'ELIA, JR., and N. R. MASTRANGELO, ARCHITECTS, have moved their offices from 591 Summit Avenue, to 905 Bergen Avenue, the Rowlands & Westphal Bldg., Jersey City, N. J.

OWEN & CLARKE, ARCHITECTS, formerly at 1805 Merchants National Bank Bldg., Mobile, Ala., have dissolved partnership. Mr. Fred W. Clarke will continue the practice by himself at No. 715 in the same building.

ROBERT WILLARD DEGROAT, B.FA., has opened an office and studio for the practice of architecture and work in the Allied Arts, at 176 York Street, New Haven, Conn.

(Continued on page 30)

EMPLOYMENT SERVICE ITEMS WILL BE FOUND ON PAGE 30, ADVERTISING SECTION

Berks County Court-house, Reading, Pa.—Wm. Dechant & Sons, Reading, Pa., Architects; McCloskey & Co., Philadelphia, Pa., General Contractors; Frantz & Luppold, Reading, Pa., Sheet Metal Contractors.

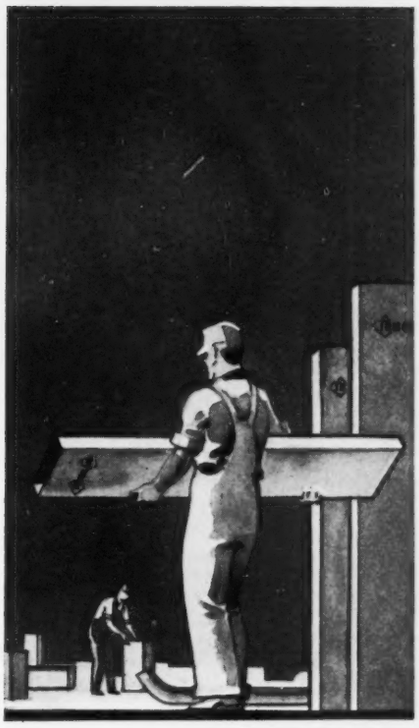

ANOTHER OUTSTANDING INSTALLATION WHERE TONCAN IRON HAS BEEN USED FOR PERMANENCE

When the question of a suitable metal for the sheet metal parts of the new Berks County Court-house, Reading, Pa., came up for discussion, Toncan Iron was the logical selection. It was used for all interior metal work, including ventilating ducts, and more than a carload was required.

The reason for the selection of Toncan Iron was simply this. The sheet metal contractors were well aware of the long life and working qualities of this alloy of refined iron, copper and molybdenum from past experience. They knew all about its high resistance to rust—ranking first among the ferrous metals after the stainless irons and steels—and that the use of Toncan Iron would be in keeping with the economy program prevalent in all building construction today.

The complete story of Toncan Iron is told in "The Path to Permanence," sixty-four pages of worth while information and illustrations of its many and varied uses. Write for a copy.

REG. U.S. PAT. OFF.
TONCAN
COPPER
MO-LYB-DEN-UM
IRON

REPUBLIC STEEL CORPORATION

GENERAL OFFICES YOUNGSTOWN, OHIO

Publications on Materials & Equipment

Of Interest to Architects, Draftsmen and Specification Writers

Publications mentioned here will be sent free unless otherwise noted, upon request, to readers of PENCIL POINTS *by the firm issuing them. When writing for these items please mention* PENCIL POINTS.

Air Filters.—A.I.A. File No. 30-d-3. New catalog describing the "Dustop" unit, a replacement cell type air filter for which glass wool is used as the filter medium, suitable for a wide range of applications. Arrangement and capacity data, installation details. 16 pp. 8½ x 11. Owens-Illinois Glass Co., Toledo, Ohio.

Ludowici Veneering Brick.—Descriptive folder covering a new patented, lightweight brick which is applied to building surfaces, either old or new, by means of metal strips, and produced in a variety of the textures and colors of standard face brick. Construction details. Ludowici-Celadon Co., 104 South Michigan Ave., Chicago, Ill.

Adequacy Wiring Standards for Residence Buildings.—A.I.A. File No. 31-c-61. Pamphlet containing recommended standards for complete electrical wiring in residences and multi-family dwellings. Recommendations are confined to provisions for the number of outlets, their nature and control and the method of supplying service to them. 12 pp. 8½ x 11. National Electric Light Association, 420 Lexington Ave., New York, N. Y.

Published by the same firm, "Minimum Specification for Adequate Wiring of Lighting Circuits in Commercial and Public Structures." A.I.A. File No. 31-c-61. Specification in booklet form recommended to architects, engineers and builders as a guide in making plans for electrical installations. 8 pp. 8½ x 11.

"Minimum Specification for Adequate Wiring of Light Circuits in Industrial Structures." A.I.A. File No. 31-c-61. A companion specification to that for commercial structures listed above. 8 pp. 8½ x 11.

Tarso-Marble.—Set of folders describing a new wall material that reproduces the veining and color of marble, adaptable for modernization work and for all types of new buildings. Included are complete installation directions. American Tarso Co., 444 Twelfth St., Brooklyn, N. Y.

Nathan Straus Equipment and Furnishings.—New catalog lists and illustrates a complete line of furniture, carpets, rugs, draperies, china, glass, silver, kitchen equipment for hotels, restaurants, hospitals, clubs, etc. 300 pp. 8½ x 11. Copies sent free of charge to architects upon receipt of written request on their letterheads. Nathan Straus & Sons, 66 West 23rd St., New York, N. Y.

Marble-Tex Block.—A.I.A. File No. 10-a. Architects' filing folder giving complete information on a newly-developed finished structural wall unit especially suited for walls, partitions, counters, etc., in buildings of all types. 4 pp. 8½ x 11. Marble-Tex Block Corp., 142nd St. and Jackson Ave., New York, N. Y.

Pelican Artists' Materials.—Catalog No. 56, just issued, covers a complete line of artists' materials, including water colors and boxes, oil colors, Eilido-Artists' colors, Zet oil colors, poster colors and chalks, waterproof drawing inks, tempera colors, pastels, crayons, etc. 64 pp. 8 x 11. Rich Art Color Co., Inc., 31 W. 21st St., New York, N. Y.

Range Burner Hot Water Supply Boiler.—Pamphlet illustrating and describing a new line of domestic hot water heating boilers especially adapted for use with range oil burners. Dimensions. The H. B. Smith Co., Westfield, Mass.

Copper Pipe and Fittings for Plumbing and Heating.—A.I.A. File No. 29-b-4. Catalog D, dealing with the subject of Mueller Streamline copper pipe and fittings, describes in detail the mechanical features of these fittings and the soldering method used in making the connections. Roughing-in dimensions and other related data. 48 pp. 8½ x 11. Mueller Brass Co., Port Huron, Mich.

The Bauer System of Floor Construction.—Bulletin with text, construction details and tabular matter covering a new method of floor construction widely adopted throughout Europe and now available for the first time in this country. 4 pp. 8½ x 11. Amerika-Interessen, Inc., Chrysler Bldg., New York, N. Y.

Circolo Transparent Liquid Water Colors.—Descriptive folder and color chart covering this line of transparent liquid water colors suitable for wash drawing, pen and ink work, illustrating, etc. Circolo Color Co., 118 E. 28th St., New York, N. Y.

The Book of 100 Houses.—New brochure illustrating one hundred city, suburban, and country residences in which Cabot's building specialties were used. Included is brief descriptive data covering these products. 24 pp. 8½ x 11. Samuel Cabot, Inc., 141 Milk St., Boston, Mass.

Heatmaster—Series F.—Attractive brochure illustrating and describing in detail the various units of an automatic gas-fired, forced warm air furnace, consisting of heating elements, raised port sectional burner, double insulating casing, automatic humidifying device, multiblade fan power plant, air cleaning filters and complete automatic control system. Engineering data, dimension drawings. 20 pp. 8½ x 11. Surface Combustion Corporation, Toledo, Ohio.

Ingersoll Stainless Clad Steels.—Descriptive folder covering a newly-developed product, made by bonding together, by patented process, of an outer ply of any practical size or gauge of stainless steel to a base of mild or carbon steel. A wide variety of applications are listed. 4 pp. 8½ x 11. Ingersoll Steel & Disc Co., 310 S. Michigan Avenue, Chicago, Ill.

Maxim Silencers and Campbell Air Conditioners.—New publication illustrates and describes briefly the Maxim silencer and Campbell air conditioner designed to provide noise elimination, ventilation, air cleaning, humidification, heating, air cooling and de-humidification for individual rooms in the home or office. 12 pp. 8½ x 11. Campbell Metal Window Corporation, 100 East 42nd Street, New York, N. Y.

Pass & Seymour Catalog.—General catalog No. 31 lists and illustrates a complete line of wiring devices, accessories and porcelain lighting units. Wiring diagrams, price lists. Indexed. 52 pp. 8¾ x 10½. Pass & Seymour, Inc., Solvay Station, Syracuse, N. Y.

Benn's Mohair.—A.I.A. File No. 28-d-2. Standard filing size folder describing the features of a mohair fabric suitable for draperies and curtains for windows and door openings in hotels, banks, schools, business offices, etc. Sample of material is attached. 4 pp. Joseph Benn Corp., 260 Fourth Ave., New York, N. Y.

The Powers Thermostatic Water Mixer.—A.I.A. File No. 29-h-3. Bulletin No. 2030 describes the safety features and construction of a thermostatic water mixer for shower baths, baby baths, hydrotherapeutic baths, shampoo fixtures, etc. 4 pp. 8½ x 11. The Powers Regulator Co., 2720 Greenview Avenue, Chicago, Ill.

Inco Standardized Monel Metal Sinks and Tops.—A.I.A. File No. 29-h-6. New publication giving complete descriptive and specification data covering additional items of Monel metal domestic service equipment in standardized sizes and models. Dimension tables and drawings. 16 pp. 8½ x 11. The International Nickel Co., 67 Wall Street, New York, N. Y.

Waterlox.—Folder dealing with the subject of Waterlox, a thin transparent liquid for the treatment and preservation of wood, brick, stucco, floors of wood, linoleum, concrete or tile, walls of concrete, brick or stone, also for use in oil paints, varnishes and enamels. Waterlox Illinois, Inc., 333 North Michigan Ave., Chicago, Ill.

Grinnell Junior Sprinkler System.—A.I.A. File No. 29-e. Architects' reference bulletin A-1 presents complete descriptive, plan, specification and installation data covering a new automatic sprinkler system designed for full fire protection in the basements and other hazardous areas of dwellings, small apartment buildings, schools, churches, stores, etc. Layouts. 8 pp. 8½ x 11. Grinnell Company, Providence, R. I.

Andersen Narroline Double-Hung Window.—Folder with details and descriptive data on a new double-hung window of improved design with narrower mullions and casings. Andersen Frame Corporation, Bayport, Minn.

The Iron Fireman Automatic Coal Burner.—A.I.A. File No. 30-g-3. Filing folder explaining the design features and fuel feeding principle of an automatic coal burner for home boilers and furnaces and for commercial heating and power plants. Typical boiler installations. 8½ x 11. Iron Fireman Mfg. Co., 3170 West 106th Street, Cleveland, Ohio.

Kerotest Forged Brass Valves and Fittings for Mechanical Refrigeration.—New catalog listing and illustrating a complete line of forged brass valves and fittings for mechanical refrigeration service. Many new types of valves, new construction features and new applications are pictured. 48 pp. 8½ x 11. Kerotest Mfg. Co., 2525 Liberty Ave., Pittsburgh, Pa.

Approved Maintenance Methods for Rubber Floors.—A.I.A. File No. 23-c. Folder outlining recommended methods for cleaning and maintaining rubber floors, both polished and unpolished. 4 pp. 8½ x 11. The Rubber Manufacturers Assn., 250 West 57th St., New York, N. Y.

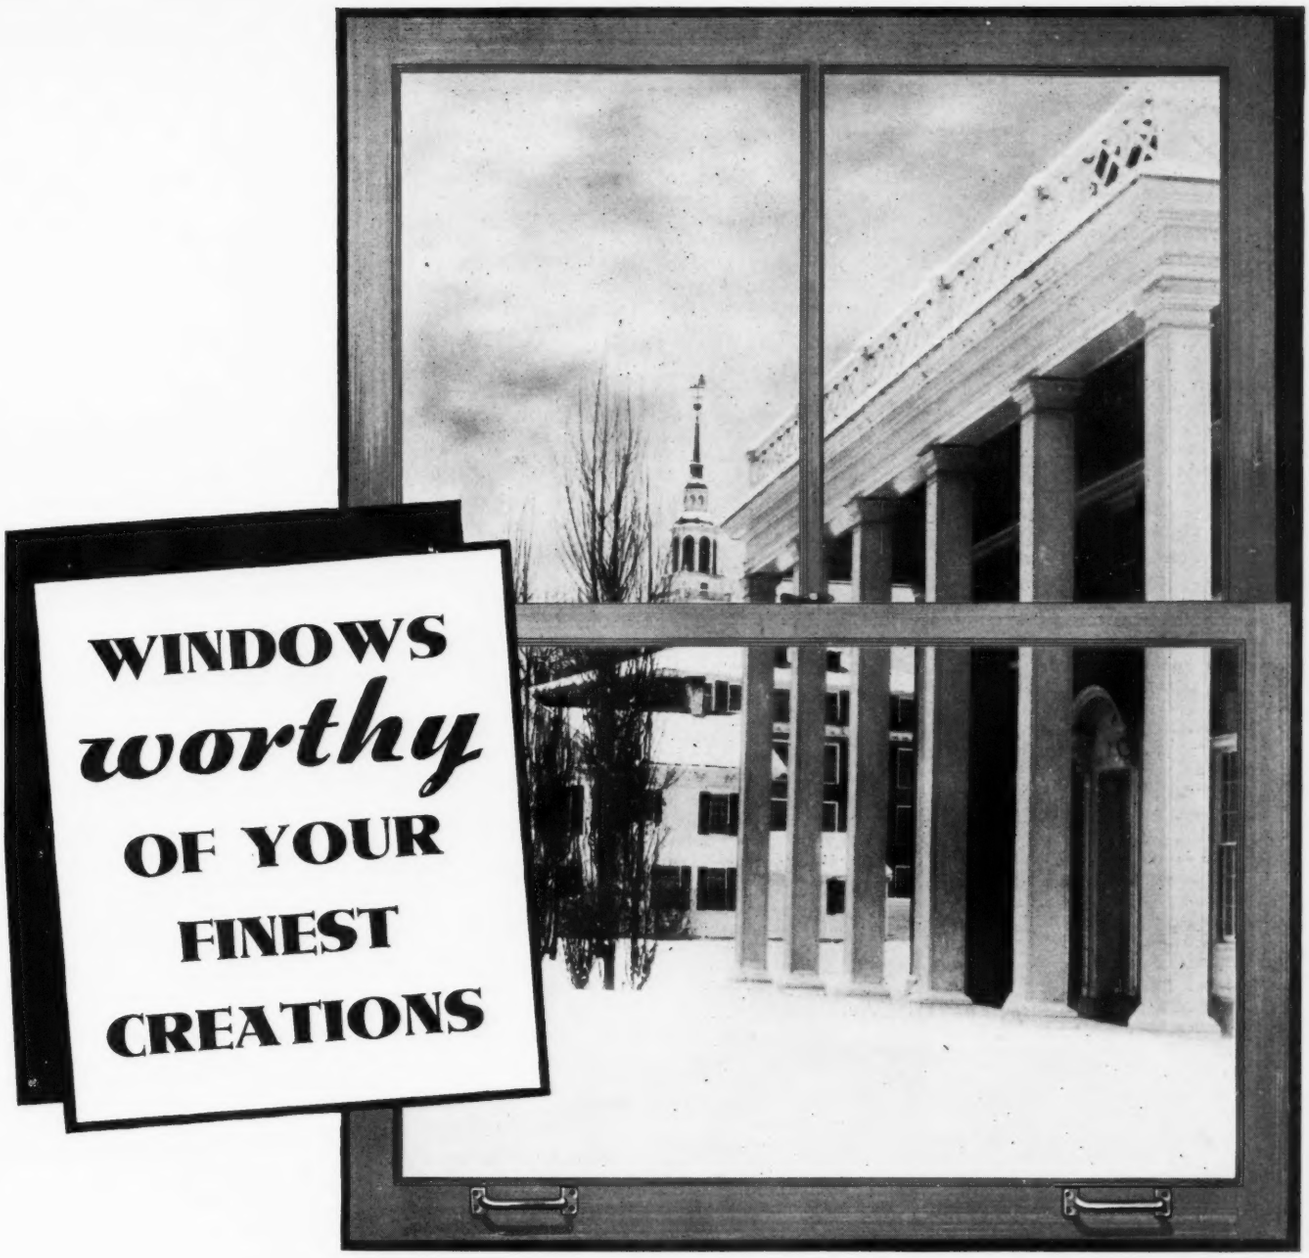

WINDOWS *worthy* OF YOUR FINEST CREATIONS

IN designing any structure, whether home, office building, or public institution, you give a generous amount of careful consideration to its windows. Their spacing, location, shape and size are important factors in the beauty of the finished edifice. And equally important is the glass with which these windows are glazed.

Windows glazed with Pennvernon Glass are worthy of your finest creations. For Pennvernon is a window glass which approaches the polished perfection of plate glass more nearly than any other sheet glass.

The exclusive Pennvernon method of manufacture imparts to this glass three qualities which distinguish it from ordinary window glass. First, a brilliant, lustrous finish on both sides of the sheet that gives Pennvernon far greater beauty and reflection, and enables the glass to be glazed either side out. Second, a remarkable transparency and freedom from defects which guarantees clean-cut, undistorted vision. And third, a new denseness and smoothness of surface which results in better resistance to wear and abrasion, and consequently, in longer lasting beauty.

Make sure of windows worthy of the buildings you design. Specify Pennvernon Window Glass. It is available in single or double strength, and in thicknesses of $\frac{3}{16}$" and $\frac{7}{32}$", at the warehouses of the Pittsburgh Plate Glass Company in all principal cities, and through progressive glass jobbers and leading sash and door manufacturers. Write us for samples to examine. Pittsburgh Plate Glass Company, Grant Building, Pittsburgh, Penna.

PENNVERNON WINDOW GLASS

A Free Employment Service for Readers of Pencil Points

Replies to box numbers should be addressed care of PENCIL POINTS, 419 Fourth Avenue, New York, N. Y.

Position Wanted: Young man, 26, single, I.C.S. student and technical school training. Registered architect in Mississippi. Five years' general drafting experience. Salary secondary to connection with some small, well established architectural firm, preferably in the South. Donald Averill Hawkins, Field Artillery School, Fort Sill, Oklahoma.

Position Wanted: Architectural engineer capable of handling complete mechanical and structural design desires connection with architectural or engineering firm. Experienced as architectural draftsman and superintendent. Age 43. Married. Southeast preferred but will go anywhere. W. R. Stults, 2030 Main Street, Jacksonville, Florida.

Position Wanted: Senior architectural draftsman. A-1 letterer. Graduate Pratt Institute. Four years' experience with New York Telephone Company. E. W. Selig, 101-37 80th Street, Ozone Park, L. I.

Position Wanted: Young man, 23, recent graduate of Cornell University, desires to associate self with architectural office anywhere. Capable and industrious. Perspectives in any medium. No salary to start. Experience main incentive. Box No. 1200, care of PENCIL POINTS.

Position Wanted: With architect doing modernization work. Registered architect with many years' experience making surveys of existing residential and business buildings, preparing preliminary sketches for modernization, scale and full size working drawings and checking engineering and shop drawings. Excellent references as to character and ability. Howard L. Hallock, 53 Grandview Avenue, White Plains, N. Y.

Free Lance Work or Position Wanted: Architectural draftsman, 39, married, fifteen years' experience in best offices, lately active as renderer and commercial artist, seeks free lance or regular employment as draftsman, renderer in any medium, or on lettering, decorative or furniture and still-life drawings for reproduction. Very low rates. F. H. Stahl, Suite 1011, 469-7th Avenue, New York, N. Y. Telephone, Lackawanna 4-2219.

Position Wanted: Anything at all. Twenty-two years' experience on apartment houses, commercial and private types of buildings, financial setups, cost breakdowns, sketches to final drawings and superintending. Registered architect New York. Six years architect for an investment banking organization. J. B. Fisher, 452 Irving Ave., Brooklyn, N. Y.

Position Wanted: Architectural drafting and designing. Perspectives all mediums. Call Teaneck 6-4960-J or write W. F. Reutter, 524 Kipp Street, Teaneck, N. J.

Position Wanted: Young man, 23, six years' experience with large building contractor, desires position either as a draftsman or estimator with architect or builder. Graduate of Grammar School, High School, one year plan reading and estimating at C. C. N. Y. and graduate of three-year construction course at Pratt Institute. Robert H. Schmerl, 24 Arden Street, New York, N. Y.

Position Wanted: University graduate, 38 years old, married and a registered architect with fifteen years of practical experience on all types of buildings, desires position as architectural draftsman, designer or superintendent of construction. References and samples of work submitted on request. Eastern location preferred but consideration will be given to any section of the country. Moderate salary. Geo. L. Richardson, 2313 Gleason Ave., New York.

Position Wanted: Architectural designer and water colorist. $25.00. References. Henry H. Law, 135 Crary Avenue, Mt. Vernon, N. Y.

Position Wanted: Young man, 23, technical school graduate in architecture, desires position in architects' office. Experience main object. Chicago preferred. Joseph R. Kremen, 1934 W. 4th Street, Chicago, Ill.

Partner Wanted: Capable designer and renderer, mostly residential work. Must invest or buy half interest in established Westchester County architect's office. Plenty of proposed work ahead. Box No. 1201, care of PENCIL POINTS.

Position Wanted: Architectural designer, with wealth of experience and training. Versatile, imaginative and capable of carrying work from preliminary sketches through to finished working drawings and details. Perspective rendering and presentation in pencil or color. Especially qualified for competitive work. Ingenuity for composition and ornamentation. Graduate of an accredited school. Will make any reasonable concession in salary. Will locate anywhere. Box No. 1203, care of PENCIL POINTS.

Position Wanted: Draftsman, architectural and engineering, 39, born and raised in Switzerland, well traveled and with good connections abroad. Sixteen years in this country. Wishes to hear from manufacturers of building materials or specialties suitable for introduction to European markets. Box No. 1204, care of PENCIL POINTS.

Wanted: Full or part time work. Formerly employed by large New York firm of architects, for ten years as head draftsman. Original sketches, plans, details, checking, supervising. University graduate, practical experience includes apartments, hotels, hospitals, banks, offices, loft buildings, and thorough knowledge of all building laws. Box No. 1205, care of PENCIL POINTS.

Partner Wanted: Registered general practicing architect with high type clientele, located in a city 500,000 population in mid-western state, desires a partner with general architectural ability and good personality, and under 40 years of age. Our practice of steady successful growth was curtailed only due to the general depression. Business now being on the upgrade it is desired to prepare for new and repeat business, based upon good sound practice and experience, and it is realized that a partner is essential, to overcome the limitations of an office managed by one architect. This is an excellent opportunity for the right man. References exchanged. Box No. 1206, care of PENCIL POINTS.

Wanted: Draftsman as partner who understands the manufacture and installing of Scagliola or Artificial Marble made from Keene and other cements. Locate in Eastern or Central States. References. P. O. Box 1051, Sacramento, California.

Position Wanted: Young man, 20, desires position in an architectural or engineering office. Has had three and a half years of practical experience in drafting. Plans to continue the study of architectural engineering. Salary of secondary importance. William M. Zelosko, 524 East 6th Street, New York, N. Y.

Position Wanted: Young man, 27, desires position with architectural firm in Chicago or vicinity. Three years' technical training in college plus two years design in atelier. Six years' practical experience on working drawings and design in Cleveland, Ohio. Entirely in sympathy with the modern. For past three years with one of leading offices in middle west. Box No. 1207, care of PENCIL POINTS.

Position Wanted: Architectural draftsman, thoroughly experienced. Will go anywhere. Box No. 1208, care of PENCIL POINTS.

MANUFACTURERS' DATA WANTED

REQUESTS FOR manufacturers' literature have been received from the following:

STILES S. DIXON, ARCHITECT, P. O. Box 2372, Tucson, Arizona.

W. NEWTON DIEHL, ARCHITECT, 406 Chandler Bldg., 1427 Eye Street, N. W., Washington, D. C.

J. CARL CROUSE, instructor of architecture, Lewistown Senior High School, Lewistown, Pa.

ANTHONY F. PESSOLANO, ARCHITECT, Centerville, Md.

JOHN A. D. MCGARR, ARCHITECT, 880 Bergen Avenue, Jersey City, N. J.

ROBERT WILLARD DEGROAT, B. F. A., 176 York Street, New Haven, Conn. (Please do not send salesmen.)

IRVIN R. SAFRANEK, ARCHITECT, 3542 New England Avenue, Chicago, Ill.

CECILIO C. SANCHEZ, CIVIL ENGINEER, 224 Mabini St., Caloocan, Rizal, P. I.

CARL J. RUDINE, architectural draftsman, 808 Monroe St., Ann Arbor, Mich.

GENE J. SCHAD, draftsman, 10 N. West Street, Waukegan, Ill.

WALTER J. HUBBARD, draftsman, 4239 Lindell Blvd., St. Louis, Mo.

W. D. CONNELLY, architectural student, No. 15, 327 14th Avenue, Minneapolis, Minn.

WM. CHARNEY VLADECK, architectural student, 125 Eastern Parkway, Brooklyn, N. Y., (for A.I.A. file).

EDWIN A. PEARSON, architectural student, 912 S. Third St., Champaign, Ill. (for A.I.A. file).

H. IAN RICHMAN, graduate student, 449 St. John's Avenue, Winnipeg, Man., Canada.

For Christmas—have you thought of these?

A MICROTOMIC VAN DYKE Sketching Set

This compact, folding, easel box contains seven of the new MICROTOMIC VAN DYKE Drawing Pencils — the supreme quality drawing pencil, made by the new chemical process — in assorted degrees. The box also contains a pencil sharpener, lengthener, sandpaper and VAN DYKE Eraser.

No. 682 MICROTOMIC VAN DYKE Sketching Set—$1.50

"Paint with Pencils"

MONGOL COLORED PENCILS, now in twenty four colors, are a gift of a thousand different pleasures and uses, for drawing, sketching, drafting—for grown-ups and children alike. "Painting with Pencils" is very simple—just MONGOL COLORED PENCILS, brush and water.

No. 743 Assortment—24 colors—$2.00
No. 741 Assortment—12 colors—$1.00



Instead of charcoal, BLACK CHALK SKETCHING STICKS—and in SANGUIN color too

The BLACK CHALK SKETCHING STICKS are easier and cleaner to handle than charcoal, and much stronger. They give a wide range of tones and allow wash effects too, with brush and water.

The SANGUIN STICKS are the same, but in the reddish-brown color of the old masters (Sanguine or Pierre d'Italie).

No. 2822 BLACK CHALK SKETCHING STICKS, made in degrees BBB Super Soft, No. 1 Soft and No. 2 Medium Soft, 12 sticks in a box—$1.00

No. 2823 SANGUIN STICKS, Soft degree, 12 sticks in a box—$1.00

"Cleaner, stronger than Pastels"

"NUPASTELS" are much cleaner and stronger than pastels. They deposit enough, but not excessive powder for grading. "NUPASTELS" give the same effects as pastels and are applied with the same technique.

No. 264 Assortment—24 colors—$1.00
No. 263 Assortment—12 colors— .50

Ask your dealer for them

EBERHARD FABER

Announcements of New Products, Changes in Personnel, etc.

A NEW TYPE RADIATOR

The Shaw Radiator, a new and distinctive type of heating surface, which provides its own cabinet, grille and radiator, all in one integral unit, has recently been placed on the market by the Shaw-Perkins Manufacturing Co., Pittsburgh, Pa.

This advanced radiator is quite compact and comprises an extended surface steel structure in permanent heat conducting contact with a large internal copper tube. All surfaces, including the exterior, conduct heat from the

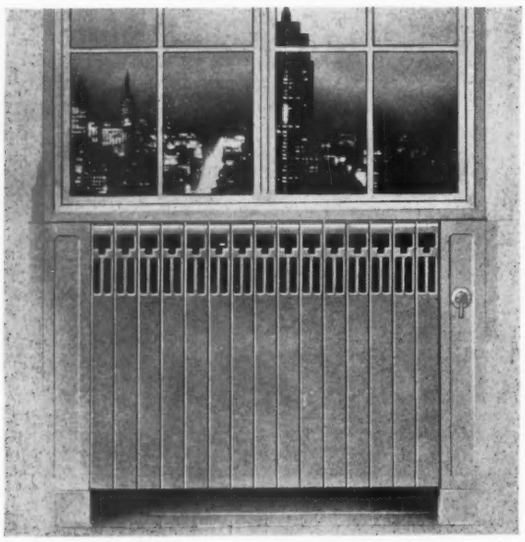

copper tube, which contains the heating medium, and give it off, by convection, to the air which circulates through and over the radiator and also, by radiation, from all of the surface.

The radiator is furnished with either front or top air outlet grille, and can be installed fully exposed upon legs or wall brackets, or recessed in the wall with the front exposed for radiant heat and appearance, and no auxiliary liners, exclosures, panels or grilles are required.

Sanitation is a prominent feature of the radiator design. The outside surfaces may be easily wiped, and the interior, which contains smooth flat surfaces with wide free air passages, is readily cleaned by vacuum, blower or brush through the bottom of the radiator.

NEW PAINT AND VARNISH PRODUCTS

The addition of several new products in the building field is announced by the Glidden Co., Cleveland, O. Among these are Gliddenspar, a bakelite and synthetic-base varnish recommended for all exterior surfaces, as well as on those places on the interior of homes subject to water and exposure, such as window sills. Q. D. Ripolin, has been added to the line of Ripolin enamels. Quick-drying Ripolin, it is stated, sets up dust-free inside of twelve hours and hard enough to recoat in twenty-four hours.

Speed-Wall is a new type of semigloss wall finish especially suitable for woodwork, furniture and for wall decorations. Base-Coat, a primer is a new development in the house paint line.

THE NEWTON PIVOT CHECK

C. H. Newton & Co., Boston, Mass., is marketing a new pivot check for single swing lavatory stall doors. Available in two types, model No. 100 is for self-closing doors. It closes and checks the door positively with no noise and with no racking of the partition, frontal or door.

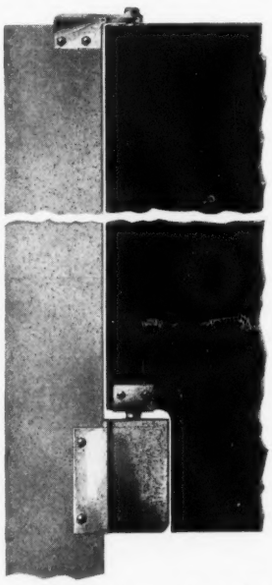

Model No. 101, similar in design to the No. 100, is for use on doors required to be self-opening. The door is opened and checked gently back against the partition with no banging or damage to the partition.

Frontals of greater thickness than 1¼ in. are not necessary when these pivots are used, as all shock to frontals and fittings is eliminated. Easily accessible valve to control closing speed is provided, also valve to give added impulse at the latch if required, as for coin locks.

SILENTAIRE—A NON-MECHANICAL WINDOW MUFFLER

A new non-mechanical muffler for every kind and size of double-hung window, known as the Silentaire, has been announced by the Truscon Steel Co., Youngstown, Ohio. This new device permits the lower sash to be raised 10 in. but prevents any additional sound because of this opening. The air current is introduced with a fast upward motion that diffuses it equally throughout the room. The muffling of noise and the flow of air are made possible by properly designed construction assisted by special acoustical controls.

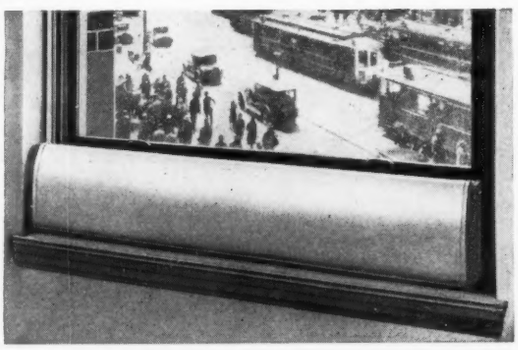

Weatherstrip along the bottom makes the window substantially weathertight. With each installation, a seal is fastened to the lower rail of the upper sash, closing the space between the sliding sections when windows are open and thus preventing sound leakage at that point. The Silentaire is quickly installed by placing into brackets which are attached at each side of window.

(Continued on page 34)

FAIENCE POLYCHROME PANEL

FAIENCE M M C

MUELLER MOSAIC CO.
FACTORY: TRENTON, N. J.
SEND FOR BOOKLET

THE CUTLER MAIL CHUTE

TO INSURE standard, dependable equipment installed promptly at moderate cost, the Cutler Mail Chute should be specified by name. If desired, approximate estimates will be furnished in advance.

If preferred, a stated sum may be allowed to cover this item.

Full information, details, specifications and estimates on request.

CUTLER MAIL CHUTE CO.
General Offices and Factory
ROCHESTER, NEW YORK

WHY . . . .

NAILCRETE

is the ideal nailing base for floors and roofs

1. Combines light weight with great strength and durability.
2. Fire-proof, rot-proof and weather-proof.
3. Easy to apply — poured like cinder or stone concrete.
4. May be applied plastically on odd-shaped contours.
5. Used over expanded metal or structural concrete arch.
6. Insulating capacity two to three times greater than that of stone concrete.
7. Nail-gripping power greater than that of any similar material—every square inch is nailable.
8. Eliminates wood nailing strips and all inflammable construction.

●

Economical—saves weight, time—lowers maintenance cost

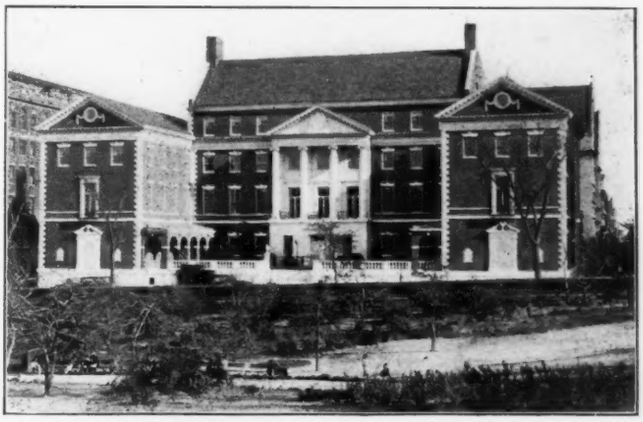

MUSEUM OF THE CITY OF NEW YORK. J. H. FREEDLANDER, ARCHT.

Nailcrete used as the nailing base for the heavy slate roof

NAILCRETE BLOCKS

Specify Nailcrete Nailable Cinder Concrete Building Blocks for load-bearing walls and partitions.

Complete details in Sweet's

THE NAILCRETE CORPORATION
105 West 40th Street New York City

THE POWERS THERMOSTATIC WATER MIXER

The Powers Regulator Co., Chicago, has recently developed a new thermostatic water mixer which is designed to thermostatically control the mixing of hot and cold water and deliver a supply of warm water for shower baths, baby baths, hydrotherapeutic baths, industrial processes, etc.

The temperature of the mixture delivered by the mixer is said to remain constant regardless of temperature or pressure changes in the hot or cold water supply lines. Failure of either supply completely shuts off the delivery flow. Restricting the delivery flow has no effect upon the delivery temperature.

The capacity of the mixer varies according to the supply pressures. With supply pressures of 40 lbs. the maximum flow is 8 gallons per minute. The mixer can be piped for either up or down delivery as it is equipped with outlets at both top and bottom.

STANDARD GRADING RULES FOR WALNUT VENEERS

The American Walnut Manufacturers' Association, representing approximately seventy per cent. of all domestic walnut veneers, announces the inauguration of a system of grading walnut veneers. The development of these grading rules is an effort in behalf of the walnut industry to make as certain and simple as possible the selection of veneers for use in panel work. Under this plan, specifications for minimum quality are determined and all veneer footage is graded in accordance with these specifications.

GRINNELL "JUNIOR" SPRINKLER SYSTEM

Automatic sprinkler protection for residences and for small buildings of all types is now made available by the introduction of the "Junior" sprinkler system by the Grinnell Company, Providence, R. I.

The "Junior" system includes all the vital elements of standard automatic sprinkler protection. It is fed from the domestic water supply through flexible copper tubing on which a series of sprinkler heads is mounted. These are special heads which operate more rapidly than ordinary solder sprinklers. An alarm feature is provided with the Grinnell Speedex alarm valve which has been especially developed for the "Junior" system and operates an automatic bell alarm when there is a fire. When a sprinkler head opens, the rush of water moves the check in the valve out of the way and this establishes an electrical contact which rings the alarm bell.

The installation can be made in a few hours by local plumber.

NEW MILCOR EXPANSION PRODUCTS

The Milcor Steel Company, Milwaukee, Wis., has added to its sheet metal building material line a new line of metal bases, window trim and stools with expansion wings. A number of different styles of bases are presented to take care of almost any type of installation. The flush-with-plaster types are for new buildings; the removable bases are for modernizing old buildings as well as for new buildings.

Other new products recently developed by the Milcor Steel Company are reinforced Bull Nose corner bead and five-inch wing corner bead with expansion wings, Milcor nailing strips and Milcor flashing receivers.

NEW PRODUCT FOR MODERNIZING

In line with the necessity for modernizing, the Ludowici-Celadon Company, Chicago, is now manufacturing a new veneering brick which can be applied economically to old buildings requiring renovating. They are made in two sizes 2¼″ x 8″ x 1″ and 3⅛″ x 8⅝″ x 1″ in various colors and textures, including dull and high glazes. Channels in the sides of the brick are provided for fastening to metal strips nailed into the wall.



The outstanding feature of these brick, and method of application, is said to be economy, particularly in the remodeling or modernizing of old buildings. To re-cover an old building it is unnecessary to provide for a foundation, cut through porches, disturb doors or windows. Dormer fronts and sides can be covered with these brick without the use of angle irons.

Due to the lightness of the brick, which is only about 25% of the weight of regular face brick, both freight and labor costs are reduced materially. While these brick are particularly adapted to modernizing work, they can also be economically used in new work for corridors, classrooms, and gymnasiums of schools and other institutional buildings.

The Mundet Cork Corporation, manufacturer of cork products, announces that C. R. Howard has been appointed distributor with offices at 408 Hillcrest Ave., Charlotte, N. C., to cover North and South Carolina. Mr. Howard will carry the full line of insulation, namely, sheet cork, cork pipe covering, cork machinery isolation and cork isolation mats, also the cork tile flooring line.

The Koh-I-Noor Pencil Co. has moved its headquarters to 373 Fourth Ave., New York. The new and larger quarters were acquired to enable the company to improve its facilities and to provide for future business expansion.

At the tenth annual convention of the American Institute of Steel Construction held recently in Pittsburgh, the following officers were elected: President, Clyde G. Conley, The Mt. Vernon Bridge Co., Mt. Vernon, Ohio; First Vice-president, Clyde MacCornack, The Phoenix Bridge Company, Phoenixville, Pa.; Second Vice-president, H. A. Fitch, Kansas City Structural Steel Company, Kansas City, Kansas; Treasurer, Robert T. Brooks, The George A. Just Company, New York, N. Y.; Assistant Treasurer, A. J. Post, Post & McCord, Inc., New York, N. Y. The convention of the American Institute of Steel Construction will be held in Chicago next year.

PENCIL POINTS

PRINTED BY

The Gillespie Bros., Inc.

THE GILLESPIE BROS INC STAMFORD CONN

STAMFORD
CONN.

Magazines, Catalogues, Monographs,
Books, Annuals and all forms of
HIGH GRADE PRINTING

This drawing was made with shading nibs No. 11 and No. 13

Esterbrook
DRAWLET PENS

With quick stroke and accurate line, Esterbrook Drawlet Pens give full interpretation to a draftsman's thought.

They are equally fluent on every type of paper: rendering, drawing, water color, rough, smooth. With T squares, they are easy, rapid and dependable.

In mechanism, Drawlet Pens are highly satisfactory. In operation, they are convenient and sure. They clean easily. They ink quickly both by dipping and by quill. They have capacious reservoirs which carry more ink at a single filling. They fit the hand naturally and restfully at correct drawing angle.

Introductory samples of Esterbrook Drawlet Pens are mailed on request.

ESTERBROOK PEN COMPANY
38 Cooper Street Camden, N. J.
or Brown Bros., Ltd., Toronto, Canada

ESTERBROOK DRAWLET PENS
FOR LETTERING AND DRAWING

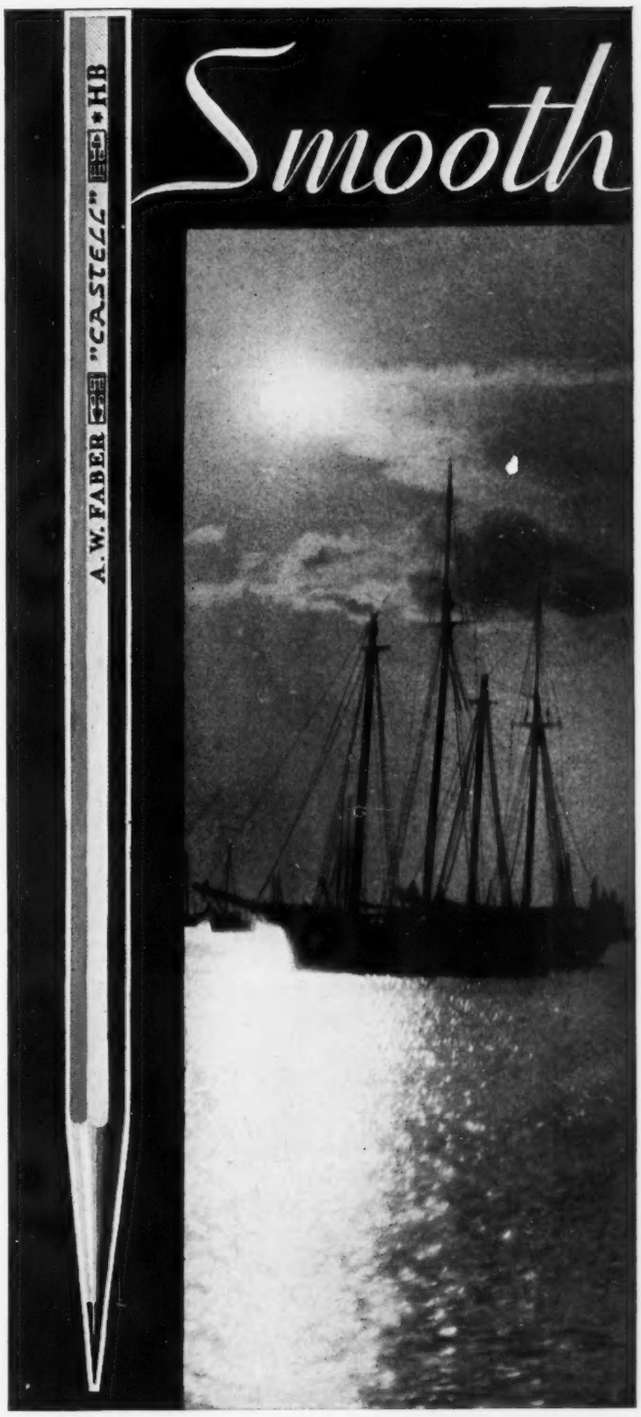

Pick up the "CASTELL" drawing pencil and move it across paper. You find it as smooth as the quiet, gleaming waters of an unruffled harbor. "CASTELL'S" smoothness reminds you of perfected plate glass. The clear texture of its graphite contains no gritty spots. It will not flake or crumble. A. W. Faber has taken the care and time and effort to make this drawing pencil really smooth for you.

"CASTELL" DRAWING PENCILS

Made by A. W. FABER, Bavaria

» "Castell" Polychromos pencils give you the nearest approach to oil color painting; available in 64 colors. Send for free Booklet.

A. W. FABER, INC.
NEWARK, N. J., U. S. A.

WHITE MOUNT AIRY GRANITE

Specify Mount Airy With Confidence

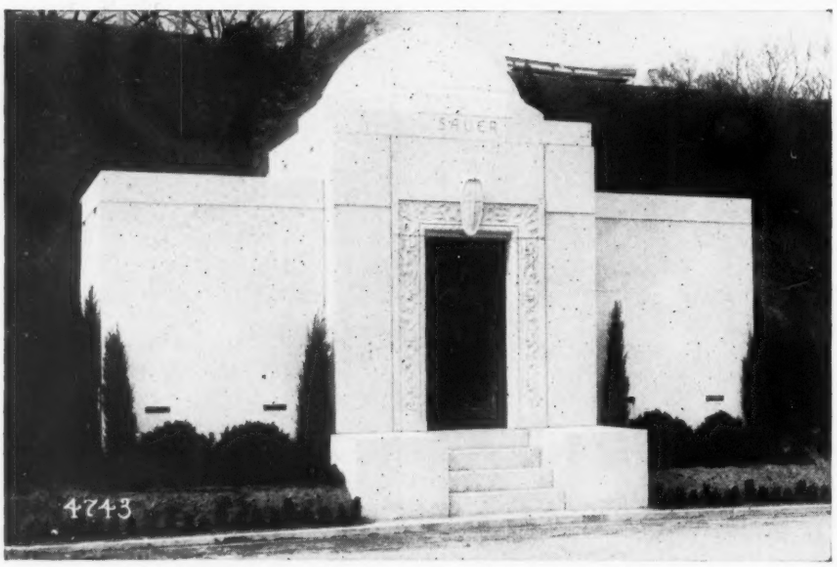

Generations Will Admire Your Choice

The Sauer Mausoleum, Richmond, Virginia

J. D. SARGENT GRANITE COMPANY
MOUNT AIRY, N. C.

MANUFACTURERS OF GRANITE FOR EVERY PURPOSE

BUT— the "looks" don't show that one shoe will outlast the other by months of wear.

Real value in cold storage doors . . . like shoes . . . is built in. It doesn't show on the surface. Proof is in the performance . . . and that is why we can guarantee Jamison Doors to outlast those of any other make, regardless of price.

OUR CATALOGUE IS FILED IN SWEET'S

Get the facts—we will be glad to supply them!

Jamison Cold Storage Door Co.
Oldest and Largest Makers of Cold Storage Doors
Jamison, Stevenson & Victor Doors
Hagerstown, Maryland **U. S. A.**

STEVENSON VESTIBULE DOOR
"Cannot Stand Open"—cuts refrigeration loss—speeds up traffic—Jamison strength.

Jamison & Stevenson Cold Storage Doors
OLDEST and LARGEST makers of Cold Storage DOORS

BRANCH OFFICES: NEW YORK, CHICAGO, CHESTER, PA. . . **AGENTS and DISTRIBUTORS:** DETROIT . . . ST. LOUIS . . . ATLANTA . . . MINNEAPOLIS CINCINNATI . . . CLEVELAND . . . OMAHA . . . SALT LAKE CITY . . . LOS ANGELES SAN FRANCISCO . . . SEATTLE . . . **FOREIGN:** LONDON, HONOLULU and JAPAN

"NOT BY FROST—NOR BY FIRE—NOR BY FLOOD—NOR EVEN BY TIME—ARE WELL BURNED CLAY PRODUCTS DESTROYED"

Cross section of Ric-wiL Type DF Conduit System at Pipe Support, with Dry-paC Waterproofed Insulation. Note how all Ric-wiL parts interlock — how pipe assembly rests entirely on the side shoulders of the Base Drain. Made of durable, waterproof materials with the Loc-liP watertight side joint, with Dry-paC Waterproofed Insulation and positive underdrainage, Ric-wiL Conduit Systems permanently protect and insulate underground steam and hot water lines.

Ric-wiL Conduits and Base Drain are not only well burned—they are vitrified and thoroughly salt glazed inside and outside to insure waterproofness. They are not "run-of-the-kiln" tile—they are designed and manufactured exclusively to protect and insulate underground pipe lines. They are of No. 1 quality, made to strict specifications and subjected to careful inspection.

No other Conduit has the Loc-liP Side Joint to lock the top and bottom conduit halves together with a watertight joint. No other System has the Base Drain Foundation to provide a cradle support for the conduit and to insure adequate drainage immediately under the conduit. The Base Drain also carries the entire weight of pipes and assures perfect alignment of the entire installation. Ric-wiL Tile Conduit Systems will successfully and economically meet all ordinary conditions and, for heavy duty work under railroad tracks, etc., Ric-wiL Cast Iron Conduit insures safety without costly construction.

Engineering details, test reports, typical plot plans, etc., gladly furnished upon request. Consult Ric-wiL Engineers at any time without obligation.

THE RIC-WIL COMPANY
1562 Union Trust Building . Cleveland, Ohio
Branches:
New York - Chicago - Atlanta - San Francisco
AGENTS IN PRINCIPAL CITIES

REG. U. S. PAT. OFF.
RIC-WIL
CONDUIT SYSTEMS FOR UNDERGROUND STEAM PIPES

WHERE NOTHING ELSE Ankyra WILL REALLY WORK

Ankor Bolts

HOLDS IN ANY WALL

—Where nothing else will really work.



—Because, neither hollow tile, expanded metal, wall boards nor position of studding, makes any difference when you use Ankyras.

Write for descriptive Folder.

ANKYRA MANUFACTURING CO.
Wayne Junction Philadelphia, Pa.

Towel rod in hollow tile

Ankyra

SPECIFY

BARBER-COLMAN *Electric* Control for BLAST SYSTEMS

Send today for our 48-page Bulletin B-2 describing the Barber-Colman *Electric* System of Temperature Control.

BARBER-COLMAN COMPANY
Rockford, Illinois

The American Institute of Architects
The Octagon, 1741 New York Avenue
Washington, D. C.

The Standard Contract Documents

These contract forms have stood the test of time. They have reduced to a minimum lawsuits and misunderstandings.

They make for good will between the Architect, the Owner, and the Contractor.

They eliminate worry. They reduce office overhead. They safeguard the position of the Architect. They expedite the business of building.

Is there any Architect who has not adopted these forms as his own?

Titles and Prices:

Agreement and General Conditions in Cover	$0.50
General Conditions without Agreement	.35
Agreement without General Conditions	.15
Bond of Suretyship	.10
Form of Subcontract	.10
Letter of Acceptance of Subcontractor's Proposal	.10
Cover (heavy paper with valuable notes) ..	.02
Complete set in cover	.75
Review of the Standard Documents—by William Stanley Parker	1.00

Complete trial set in cover (75c) will be mailed from The Octagon the day the order is received or can be had from almost any dealer in Architects' supplies.

Miscellaneous Documents

Agenda for Architects	$ .40
Standard Filing System	.50
Alphabetical Index to Standard Filing System	.50
Standard Filing System and Alphabetical Index (combined)	1.00

Books

Handbook of Architectural Practice	$5.00
The Autobiography of an Idea—*Louis H. Sullivan*	3.00
A System of Architectural Ornament—*Louis H. Sullivan*	15.00
Charleston, S. C. (Vol. I—Octagon Library of Early American Architecture)	20.00
Bertram Grosvenor Goodhue—Architect and Master of Many Arts	30.00

Transportation prepaid on orders amounting to $1.00 or more net. Orders, communications and remittances (checks, money-orders, cash or stamps) should be sent to The American Institute of Architects, The Octagon, 1741 N. Y. Ave., N. W., Washington, D. C.

Index to Advertisers

Advertising Office: 419 Fourth Avenue, New York, N. Y. Philip H. Hubbard, *Vice Pres. and Adv. Mgr.*
District Offices: 1050 Straus Building, Chicago; 953 Leader Building, Cleveland; 703 Market St., San Francisco

American Institute of Architects 37
American Steel & Wire Company 16
Angel, H. Reeve, & Company, Inc. 39
Ankyra Manufacturing Company 37
A. P. W. Paper Company 39
Atlantic Terra Cotta Company, The 1

Barber Asphalt Company 6
Barber-Colman Company 37
Beaux-Arts Institute of Design 38
Bommer Spring Hinge Company 9
Book-Cadillac Hotel 8

Carnegie Steel Company ..... 2nd Cover
Chalfonte-Haddon Hall 10
Cutler Mail Chute Company 33

Dietzgen, Eugene, Company 40
Dixon, Joseph, Crucible Company 25
Duriron Company, Inc. 4

Esterbrook Pen Company 35
Evans, W. L. 9

Faber, A. W., Inc. 35
Faber, Eberhard 31

General Electric Company—Merchandise Department 3
Gillespie Brothers, Inc. 35
Guastavino, R., Company 14

Higgins & Sons, Chas. M. 39
Hope's Windows, Inc. 12

Jamison Cold Storage Door Company 36

Leonard-Rooke Company 8
Louisville Cement Company 5

Mueller Mosaic Company 33

Newport Rolling Mill Company 10

Otis Elevator Company ..... 3rd Cover

Pecora Paint Company 9
Pittsburgh Plate Glass Company 29

Republic Steel Corporation 27
Ric-wiL Company, The 36
Rundle-Spence Manufacturing Company 8

Sargent, J. D., Granite Company 36
Smyser-Royer Company 6
Sonneborn, L., Sons, Inc. 11
Stevenson Cold Storage Door Company 36

Vermont Marble Company 2
Vitrolite Company, The ..... 4th Cover

Youngstown Sheet & Tube Company 7

BEAUX-ARTS INSTITUTE OF DESIGN
304 East 44th Street, New York, N. Y.
Nominal Fee for Instruction in
ARCHITECTURAL DESIGN, SCULPTURE, INTERIOR DECORATION, MURAL PAINTING COMPOSITION
In cooperation with other educational institutions
COURSES IN SCULPTURE IN ALL ITS BRANCHES AT THE INSTITUTE
Instruction founded on the principles of the Ecole des Beaux-Arts of Paris
Circular on Application

Spring Back Binders for Pencil Points
Two-inch Capacity **$1.50**
THE PENCIL POINTS PRESS, Inc.
419 Fourth Avenue New York, N. Y.

KEEP A SET HANDY
TO *SPEED UP*
YOUR WORK!

MANY users of Higgins' Black Drawing Inks have yet to experience the convenience and satisfaction which a *complete* set of Higgins' Drawing Inks accords, saving valuable draughting time, and assuring accurate and immediate identification on blue print or tracing.

BLACKS (India Ink)
WATERPROOF (White Label) GENERAL (Soluble) (Red Label)

COLORS

Brilliant		*Waterproof*
CARMINE	BLUE	BROWN
BRICK-RED	VERMILION	SCARLET
ORANGE	INDIGO	VIOLET
GREEN		YELLOW

WHITE
WATERPROOF (Opaque)

In the execution of wash drawings, Higgins' Drawing Board and Library Paste is unsurpassable. Especially made to hold paper tight and flat to drawing board and prevent curling or buckling when wash is applied.

CHAS. M. HIGGINS & CO., Inc.
271 Ninth Street Brooklyn, N. Y.

HIGGINS'
Drawing Inks

. . . WHATMAN — the choice of the Masters for a hundred and fifty years. Genuine Hand Made, permanent as good taste, with three sympathetic surfaces for pen and ink, water color or wash.

Samples are free to Artists, Architects and Engineers.

H. REEVE ANGEL & CO., Inc.
7-11 Spruce Street New York, N. Y.

J WHATMAN
Genuine Hand-Made
DRAWING PAPERS

Onliwon Sanitary Washroom Service

MAKE Old Washrooms LIKE NEW

Specify and install the modern A. P. W. Onliwon Washroom Service. The sanitary and economical A. P. W. Onliwon Towels and Toilet Tissue are being put into all buildings interested in enhancing rental values, and giving tenants what they really need and prefer. Inquire and you will find that the attractive and serviceable A. P. W. Cabinets and Fixtures certainly snap up the appearance of any washroom. Send today for complete catalog of A. P. W. Cabinets and Fixtures. **Free.** It will be a real aid in all your remodelling plans. Clip the coupon below and mail to A. P. W. Paper Co., Albany, N. Y.

Pioneers for Cleanliness since 1877

A.P.W.
TRADE-MARK REGISTERED IN U. S. PATENT OFFICE

PP-12-32

A. P. W. Paper Co., Albany, N. Y.
Please send me the latest and complete catalogue of A. P. W. Cabinets and Fixtures.

Name.....
Address.....
City.....*State*.....

BALANCE

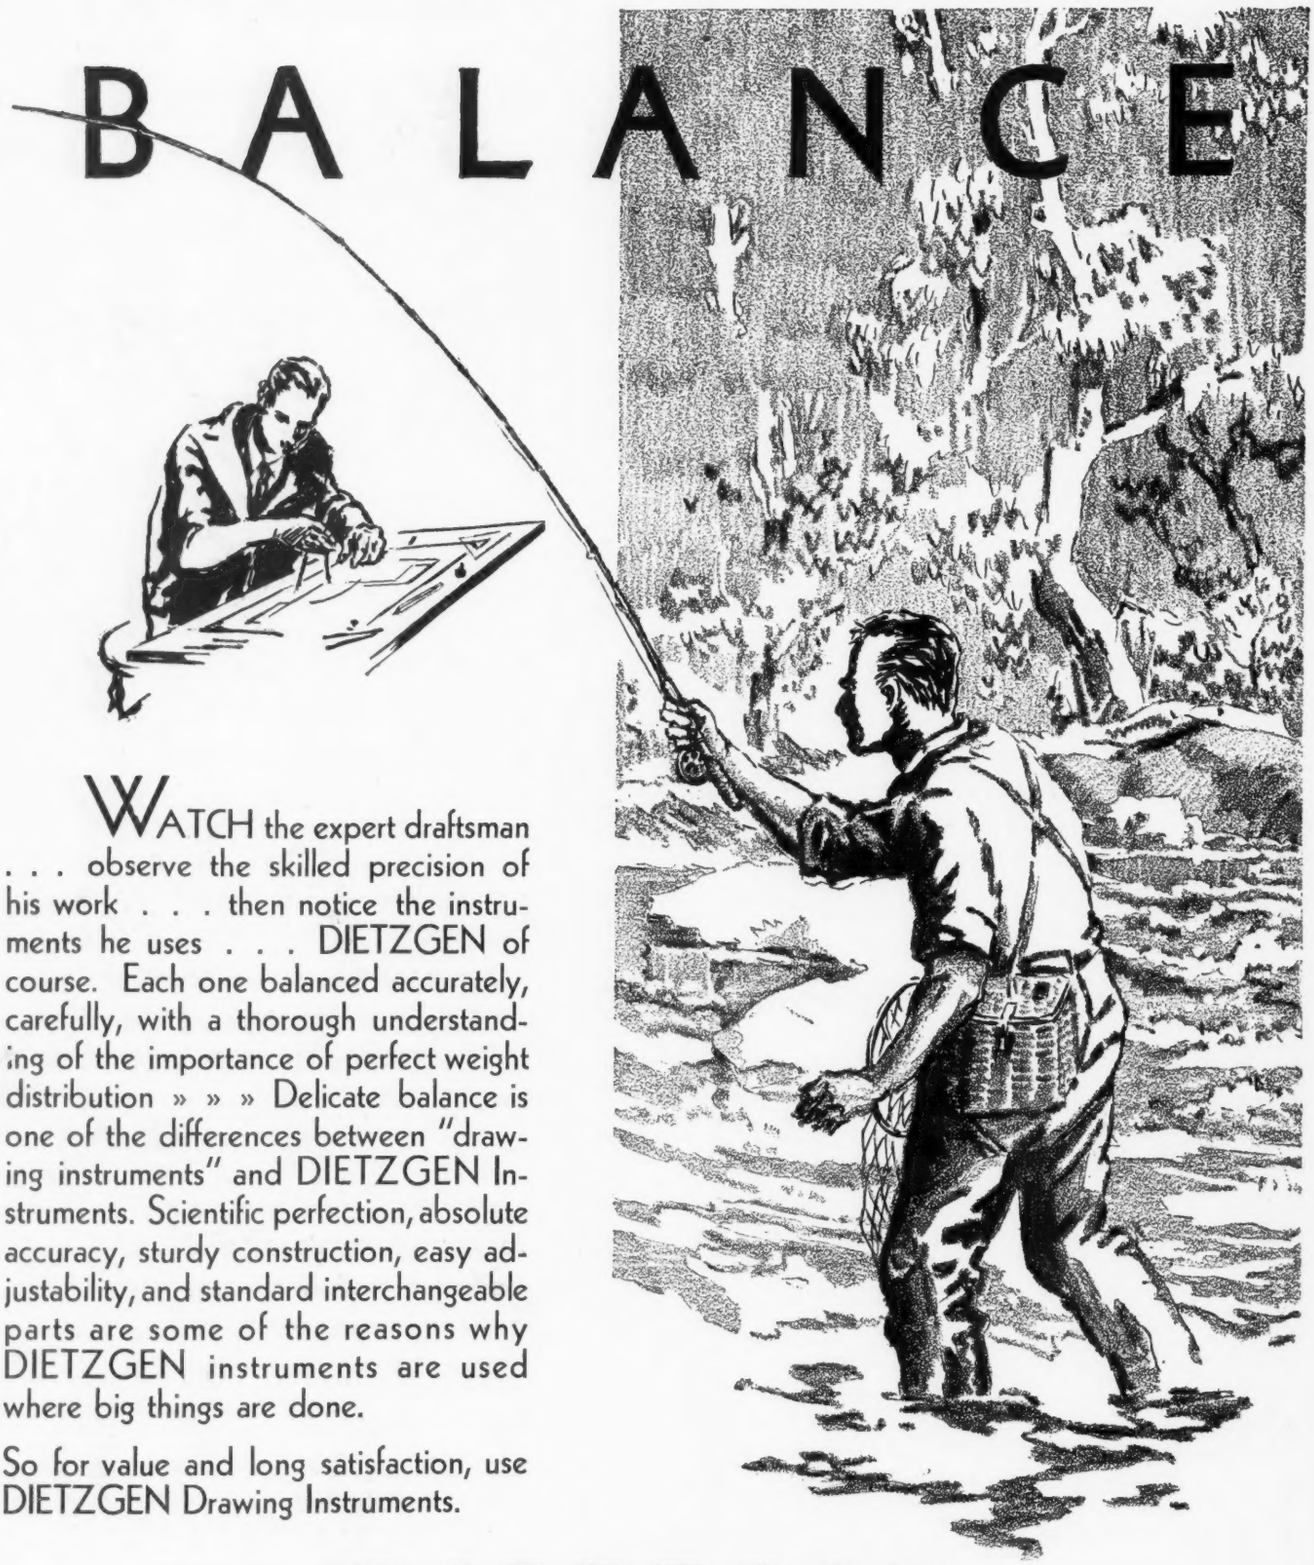

WATCH the expert draftsman . . . observe the skilled precision of his work . . . then notice the instruments he uses . . . DIETZGEN of course. Each one balanced accurately, carefully, with a thorough understanding of the importance of perfect weight distribution » » » Delicate balance is one of the differences between "drawing instruments" and DIETZGEN Instruments. Scientific perfection, absolute accuracy, sturdy construction, easy adjustability, and standard interchangeable parts are some of the reasons why DIETZGEN instruments are used where big things are done.

So for value and long satisfaction, use DIETZGEN Drawing Instruments.

DIETZGEN

Eugene Dietzgen Co., Manufacturers of Drafting and Surveying Supplies

Chicago New York New Orleans Pittsburgh
San Francisco Milwaukee Los Angeles Philadelphia Washington

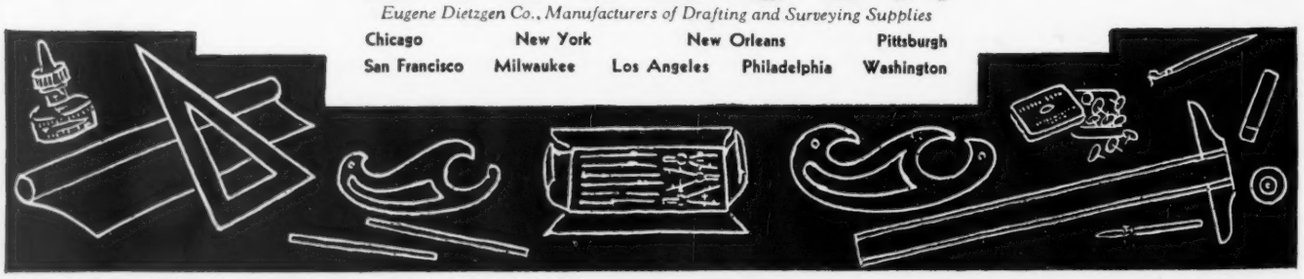

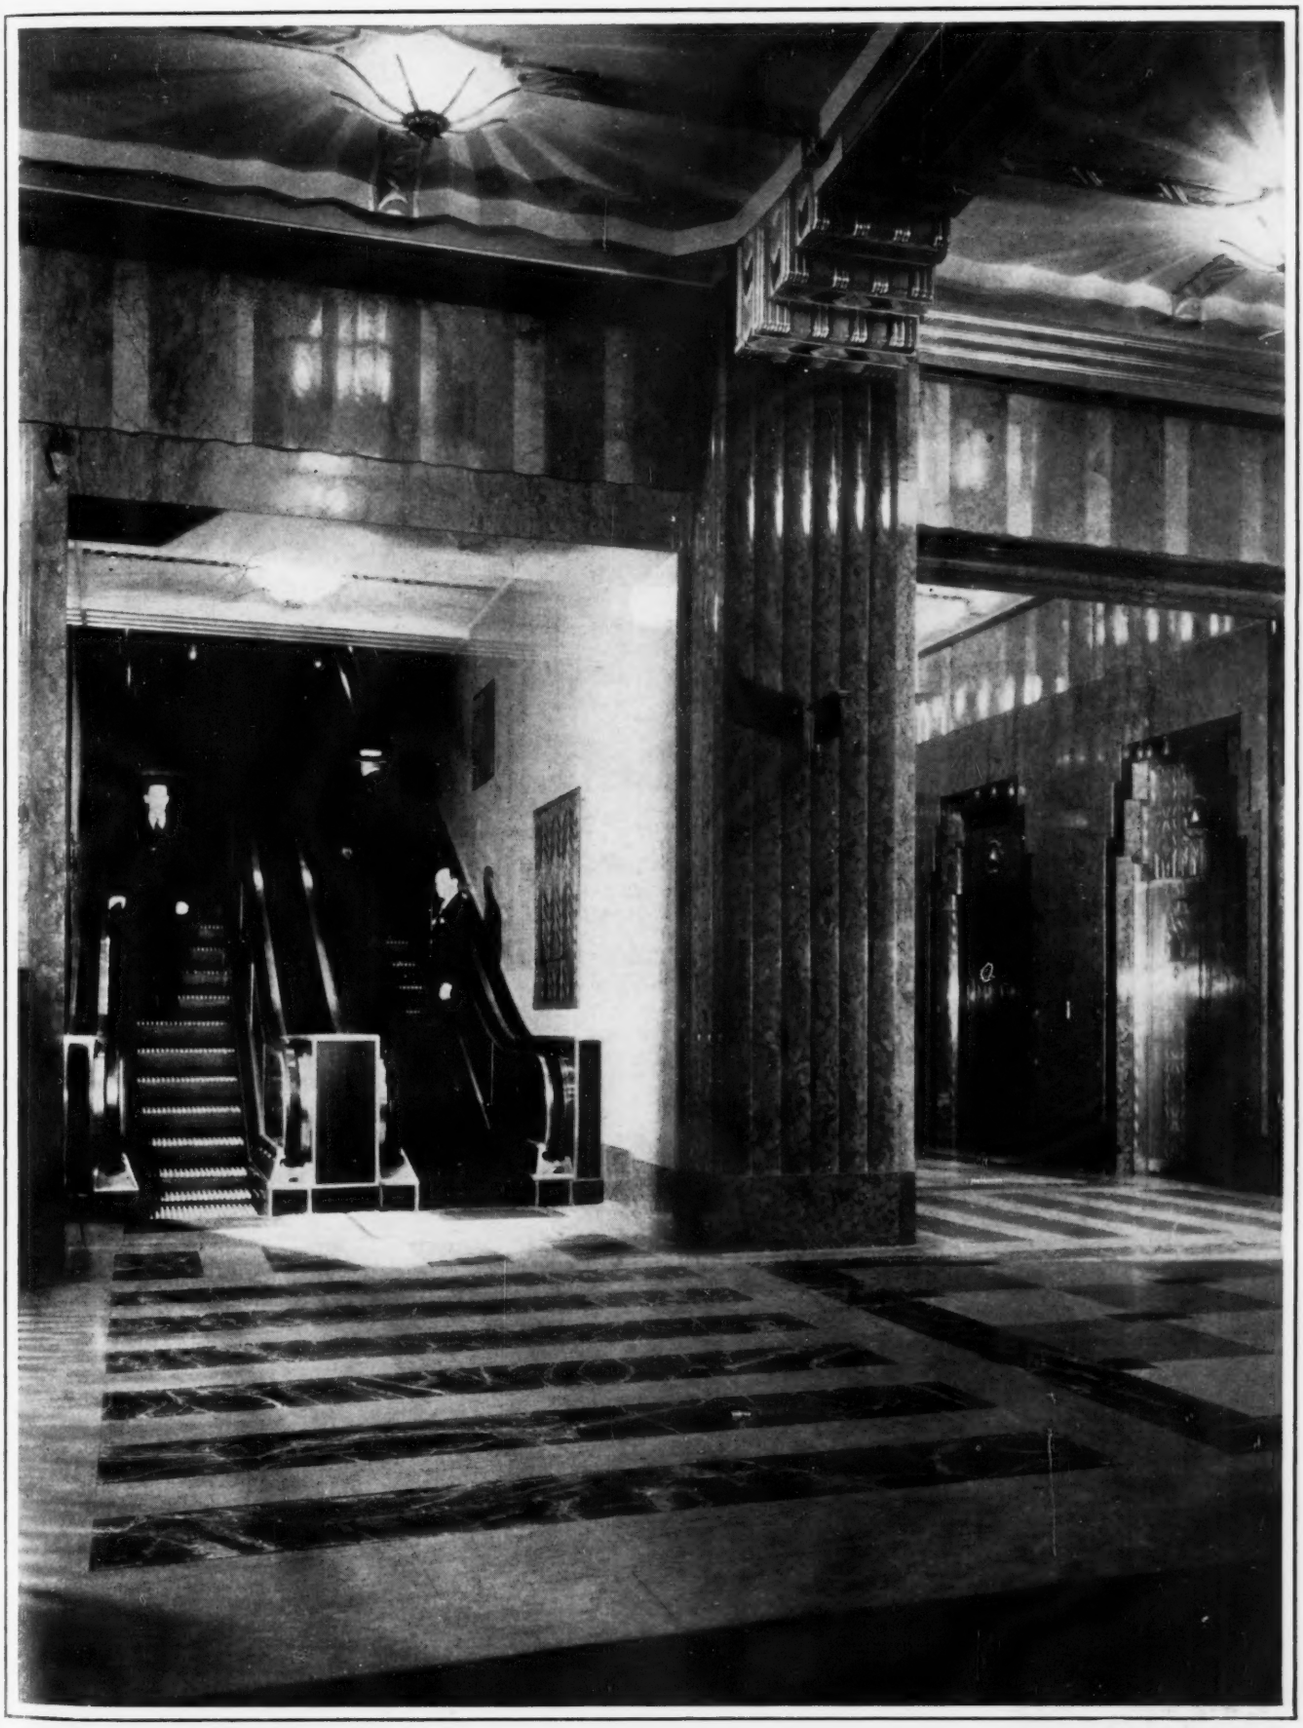

Photograph by Wurts Bros.

WE WISH to direct your attention to this photograph because it illustrates an important building trend of today, namely, the use of escalators to supplement elevators. These escalators handle the heavy traffic of lower floors and leave the elevators free to serve upper-floor tenants. Photograph of the new Cities Service Building, of New York City. Sixty Wall Tower. Escalator and elevator installation by Otis Elevator Company.

Printing of Pencil Points by The Gillespie Bros., Inc., Stamford, Conn., U. S. A.

From RETAIL STORE to SKYSCRAPER
VITROLITE
is the Modernizing Material»»»

Large illustration shows A. Rost & Sons' store as now completely modernized with VITROLITE front. Contrast this new trade-attracting front with that of the small photograph which shows store building before VITROLITE wrought a magic transformation

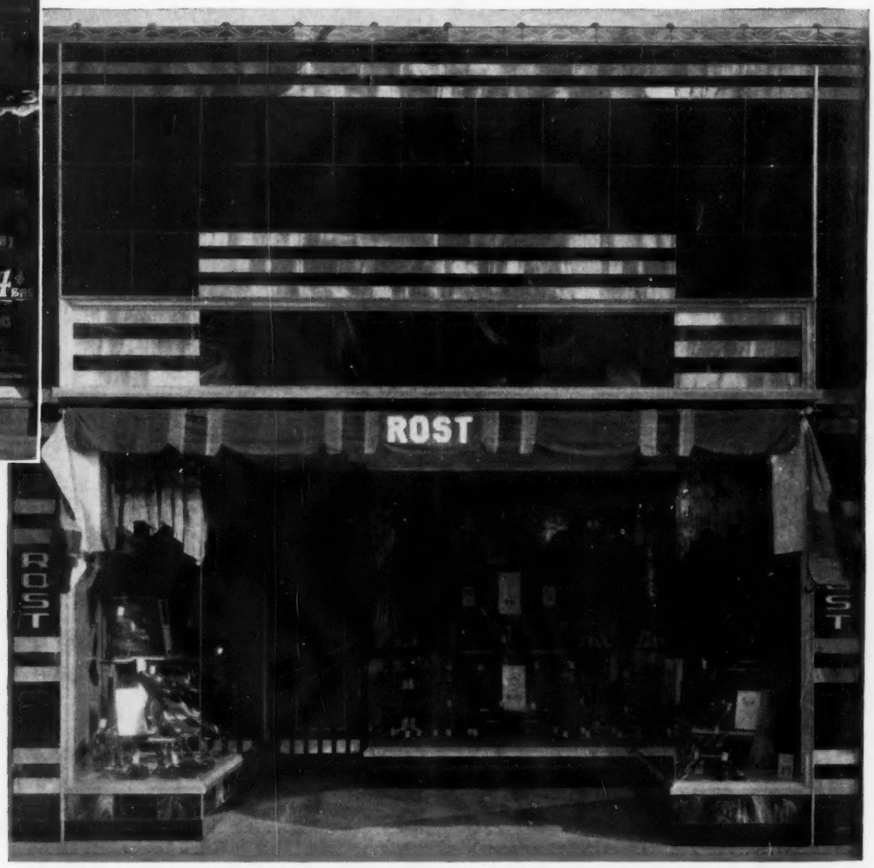

A. Rost & Sons' Fine Shoe Store in Oak Park, Illinois, with an entirely new modern VITROLITE front just installed by Vitrolite Products Company, Chicago. Front designed by Frank Sohn, Art Director of The Vitrolite Company

● MODERNIZATION of architecture is the demand of today — for present buildings, as well as those to be erected — for modest retail stores, as well as the magnificent skyscrapers.

In distinguished modernization VITROLITE is taking ever-increasing dominance. Its jet black, or colorful glistening surfaces — easy to clean and keep clean — its wide adaptability — its permanence — its reasonable cost, recommend it to America's leading architects.

Above is illustrated one of the most recent examples. The front is done entirely in glistening black VITROLITE, accented by ornamental separations in golden agate and walnut agate VITROLITE. The store-name is sand-blasted in VITROLITE on the pilasters.

The whole design of this beautiful front was original with, and supplied by Frank Sohn, Art Director of The Vitrolite Company. Here is a service freely available to all architects. All the newest modern designs in VITROLITE for exteriors and interiors of every type of building, are at your command — and Mr. Sohn will give his personal service to the creation of new and original designs to carry out your own ideals or requirements. VITROLITE harmonizes well with aluminum, chromium plate, and stainless steel accent. It is supplied in white, ivory, jade, gray, orchid, and black in plain, decorated, or with a variety of patterns in light sandblast — in emerald, walnut, ebony, light green, and golden agate. Write for "Vitrolite Construction Details."

THE VITROLITE COMPANY

120 S. La Salle St., Room 1119, CHICAGO, ILL., *Factory:* PARKERSBURG, W. VA.

REPRESENTATIVES IN ALL PRINCIPAL CITIES IN U. S. AND CANADA

VITROLITE
"BETTER THAN MARBLE"

Printing of Pencil Points by The Gillespie Bros., Inc., Stamford, Conn., U. S. A.